

THERMOSTAT WIRE, 20/2 UNSHIELDED CL2R



207-202/500BR	Thermostat Wire, Unshielded, CL2R, 500ft, Brown
----------------------	---

DESCRIPTION

Thermostat Wire, Solid Bare Copper, 20/2, CL2R, ETL, PVC Jacket, 500ft.


FEATURES

- 20 AWG Solid Bare Copper Conductors
- Unshielded construction
- Riser Fire Safety Rating (CL2R)
- Class 2 power-limited circuit cable for use in thermostat control applications
- Heat and moisture resistant insulation
- ETL Verified, RoHS Compliant
- Packaging: 500 ft Spool

Conductor	Solid Bare Copper
Size	20 AWG 0.032 in. (0.81 mm ±0.01)
Insulation	PVC
Insulation Diameter	0.047 in. (1.2 mm ±0.1)
Average Thickness	0.007 in. (0.18 mm)
Minimum Thickness	0.0063 in. (0.16 mm)
Color	White, Red
Rip Cord	Yes
Jacket	PVC
Outer Diameter	0.14*0.09 in. (3.45*2.2 mm ±0.2)
Average Thickness	0.017 in. (0.43 mm)
Minimum Thickness	0.015 in. (0.38 mm)
Color	Brown
Electrical & Physical Properties	
Conductor DCR @ 20°C	≤36.4Ω/km
Operating Temperature:	-20°C ~ 60°C
Voltage Rating	150 V (per NEC® Article 725)
Flame Test	CL2R
Standards	UL13, NEC® Article 725

Marking on Jacket
VERTICAL 5024318 (ETL) CL2R THERMOSTAT CABLE 20AWG 2C
XXXFT SUN RES ROHS RM# A B C D E F 1 2 3 4 5 6 7 8 9

Weight
207-202/500BR 6.4 lbs

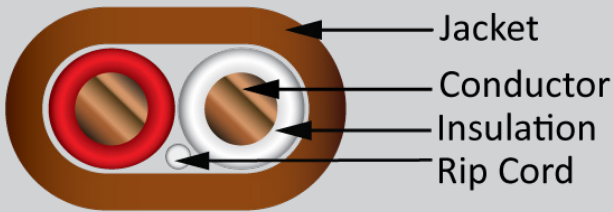

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York
713.322.7242 Texas



www.verticalcable.com

Rev. 07/2024
Subject to change without notice.