

18 AWG 2 CONDUCTOR FPLR (RISER) - UNSHIELDED



216-182/R/BL (blue)
216-182/R/RD (red)
216-182/R/YL (yellow)
216-182/R/GR (green)


DESCRIPTION

Fire Alarm Cable, 18 AWG 2 CONDUCTOR
Solid Bare Copper, FPLR (RISER)
Unshielded

FEATURES

- FPLR (Power-Limited Fire Alarm Riser Cable)
- Fire protective signal circuit
- Solid Bare Copper Conductors
- ETL Listed, RoHS Compliant
- 1000 ft Spool

Applications: Smoke alarms and detectors, pull boxes, burglar alarms, addressable fire alarm systems

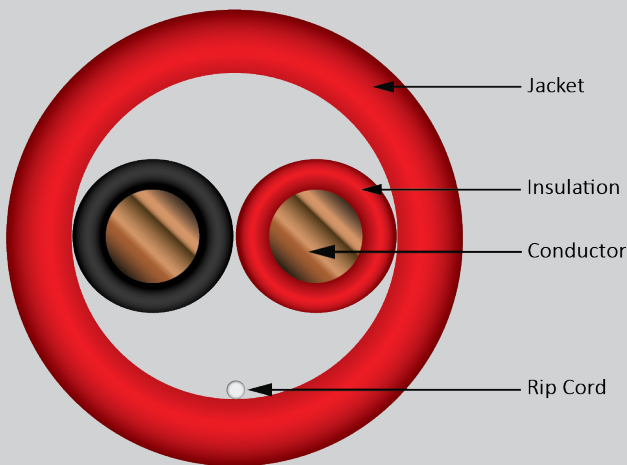

Conductor

Material	18 AWG Solid Bare Copper
Conductor Construction	0.04 in / 1.02±0.01 mm
Conductors	2 Conductor

Insulation

Material	Polyvinyl Chloride (PVC)
Diameter	0.06 in / 1.50±0.1 mm
Average Thickness	0.009 in. / 0.22 mm
Min. Thickness	0.007 in. / 0.18 mm
Colors	Red, Black

Jacket

Material	Low Smoke PVC
Overall Diameter	0.15 in. Nom. / 3.9±0.2 mm
Average Thickness	0.017 in. / 0.43 mm
Min. Thickness	0.014 in. / 0.35 mm
Color	Multiple colors (check availability)

Rip Cord

Polyester Rip Cord

Electrical & Physical Properties

Operating Temperature Rating	-20°C to +75°C
Operating Voltage Rating	300 V RMS (not for power purposes)
DC Resistance per conductor @ 20°C	≤21.4 Ω/KM

Ratings/Approvals

NEC Article 760, UL Subject 1424, Type FPLR, ETL Listed, RoHS Compliant

Jacket Print

18AWG 2C UNSHIELDED RISER FIRE ALARM CABLE (ETL)us TYPE FPLR
5024318 XXXXXX PO#XXXXX 0002FT...1000FT

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York



www.verticalcable.com

Rev. 10/2024

Specs subject to change without notice.

It is the sole responsibility of the user to have the most current specs.