

ALARM-SECURITY CABLE

22 AWG 2 CONDUCTOR

STRANDED CONDUCTORS SHIELDED



DESCRIPTION

22 AWG 2 Conductor Stranded Bare Copper, CM/CL2, Shielded with an overall jacket. 1000 ft Pull Box

APPLICATION

- Intercom Systems
- Security Systems
- Sound and Audio
- Power Limited Control Circuits
- Indoor Applications
- Door Controllers
- Key Pads
- Smoke Detectors



210-222ST/S/GY

CONSTRUCTION

Conductor count:	2
Shape:	Round
Rip cord:	Yes
PE Tape:	Yes
Drain Wire (TC):	Yes
Aluminum Foil:	Yes

CONDUCTORS

Material:	Stranded Bare copper
Trade size:	22 AWG
Conductor O.D.:	0.02 in. (0.61 mm)
Insulation material:	Polyvinyl Chloride (PVC)
Insulation O.D.:	0.04 in. (1.10 mm)
Insulation color:	Red, Black

JACKET

Material:	Polyvinyl Chloride (PVC)
Thickness:	0.02 in. (0.45 mm)
O.D.:	0.13 in. (3.30 mm)
Marking:	VERTICAL 5024318 cETLUS CM/CL2 22AWG 2C STRANDED SHIELDED 75C SUN RES RoHS 19706N0405102 15:16 XXXXFT

MECHANICAL


Temperature rating:	75° C
---------------------	-------

SAFETY

NFPA 70 (NEC®) rating:	CM/CL2
Voltage rating:	300 V RMS

PACKED WEIGHT

210-222ST/S/GY	13 lb
----------------	-------

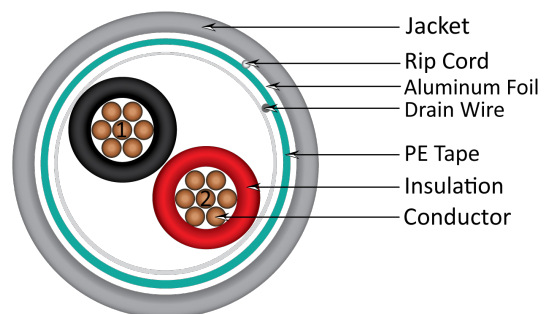

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York
713.322.7242 Texas



www.verticalcable.com

Rev. 11/2024
Subject to change without notice.