

# ALARM-SECURITY CABLE

## 22 AWG 4 CONDUCTOR

### SOLID CONDUCTORS (SHIELDED)



## DESCRIPTION

22 AWG 4 Conductor Solid Bare Copper,  
Shielded with an overall jacket.  
500 ft, Pull Box, Grey

## APPLICATION

- Intercom Systems
- Security Systems
- Sound and Audio
- Power Limited Control Circuits
- Indoor Applications
- Door Controllers
- Key Pads
- Smoke Detectors



## 210-224SO/S/5GY

### CONSTRUCTION

Conductor count:	4
Shape:	Round
Rip cord:	Yes
Aluminum Foil:	Yes
PE Tape:	Yes
Drain Wire (TC):	7/0.20

### CONDUCTORS

Material:	Bare solid copper
Trade size:	22 AWG
Conductor O.D.:	0.02 in. (0.61 mm)
Insulation material:	Polyvinyl Chloride (PVC)
Insulation O.D.:	0.04 in. (0.96 mm)
Insulation color:	Red, Black, White, Green

### JACKET

Material:	Polyvinyl Chloride (PVC)
Thickness:	0.02 in. (0.45 mm)
O.D.:	0.1 in. (3.40 mm)
Marking:	VERTICAL 4001453 cETLUS CM/CL2 22AWG 4C SOLID SHIELDED 75C SUN RES RoHS V13798889 XXXFT

### MECHANICAL


Temperature rating:	75° C
---------------------	-------

### SAFETY

NFPA 70 (NEC®) rating:	CM/CL2
Voltage rating:	300 V RMS

### PACKED WEIGHT

210-224SO/S/5GY	8 lb (3.6 kg)
-----------------	---------------

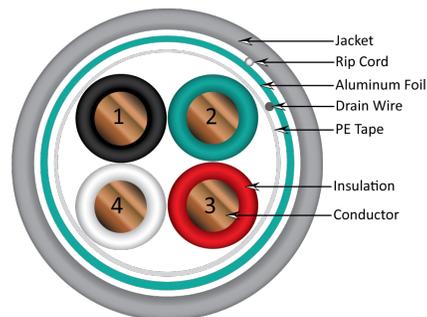

## VERTICAL CABLE

951.696.7772 California  
800.749.2447 Florida  
845.391.8318 New York  
713.322.7242 Texas



[www.verticalcable.com](http://www.verticalcable.com)

Rev. 11/2024  
Subject to change without notice.