

ALARM-SECURITY CABLE

22 AWG 4 CONDUCTOR

DIRECT BURIAL/OUTDOOR RATED




DESCRIPTION

22 AWG 4 Conductor Stranded Bare Copper. Direct Burial, Outdoor Rated, 1000 ft, Black. Unshielded.

APPLICATION

- Intercom Systems
- Security Systems
- Sound and Audio
- Power Limited Control Circuits
- Outdoor Applications
- Door Controllers
- Key Pads
- Smoke Detectors

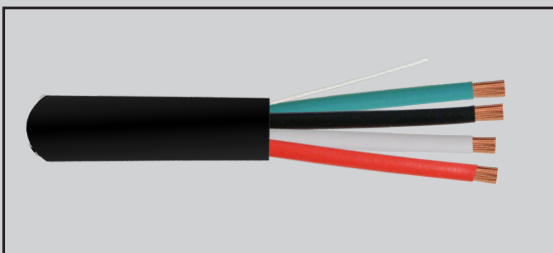

210-224ST/DB

CONSTRUCTION

Conductor count	4
Shape	Round
Rip Cord	Yes

CONDUCTORS

Material	Stranded Bare Copper
Trade Size	22 AWG
Diameter	7 Strand (7x0.24 mm ±0.01)
Insulation Material	Polyvinyl Chloride (PVC)
Insulation O.D.	0.04 in. (1.12 mm ±0.1)
Insulation Avg Thickness	0.008 in. (0.20 mm)
Insulation Min. Thickness	0.007 in. (0.18 mm)
Insulation Color	Red, Black, White, Green

JACKET

Material	PE
Avg. Thickness	0.022 in. (0.55 mm)
Min. Thickness	0.02 in. (0.5 mm)
Jacket O.D.	0.18 in. (4.5 mm ±0.2)
Color	Black
Wrapping Tape	Waterblock Tape
Wrapping Tape Material	PET
Rip Cord	Yes

JACKET MARKING

VERTICAL 5024318 c(ETL)us 22AWG 4C STRANDED UNSHIELDED PE JKT CMX OUTDOOR / DIRECT BURIAL RoHS XXXXFT 076110N070824 06:49

ELECTRICAL


Operational Temperature	-20°C ~ +70°C
Nom. Conductor DCR	≤ 55.4 Ohm/km
Resistance	UV

SAFETY

Voltage Rating	300 V RMS
----------------	-----------

PACKED WEIGHT

210-224ST/DB	17 lb
--------------	-------

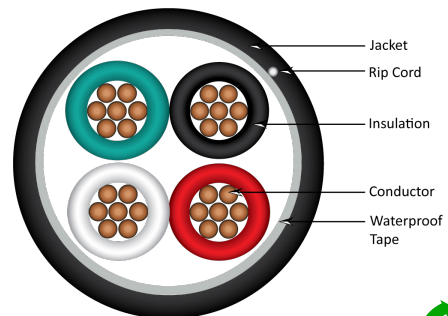

VERTICAL CABLE

951.696.7772 California

800.749.2447 Florida

845.391.8318 New York

713.322.7242 Texas



www.verticalcable.com

Rev. 11/2024

Subject to change without notice.