

18AWG 4 CONDUCTOR PLENUM RATED (CMP)




DESCRIPTION

18/4 Stranded Bare Copper Conductors, Unshielded with an overall jacket. (CMP) Plenum Rated, 500 ft Pull Box

APPLICATION

- Intercom Systems
- Security Systems
- Sound and Audio
- Power Limited Control Circuits
- Indoor Applications

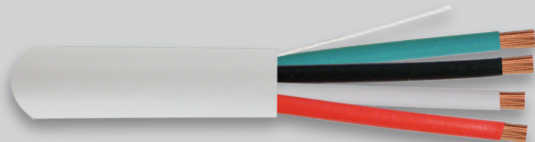

211-184/P/5WH

Conductor

Material	Bare Copper
Size	18AWG
Stranding	7 Strand
Conductors	4 Conductor

Insulation

Material	Low Smoke Flame
Retardant PVC	
Thickness	0.009 in. (0.228mm) Nominal
Colors	Black, Red, White, Green

Jacket

Material	Low Smoke Flame Retardant PVC
Thickness	0.015in (0.381mm) Nominal
Overall Diameter	0.184in (4.673mm) Nominal
Color	White

Electrical & Physical Properties


Voltage	300V RMS
DC Resistance per Conductor @ 20°C	6.92Ω/1000ft
Nominal Capacitance:	29.4pf/ft
Nominal Impedance :	73Ω
Nominal Velocity of Propagation:	55%

Ratings/Approvals

NEC Article 800, Type CMP
c(ETL)US or c(UL)us, RoHS Compliant
UL Subject 444

PACKED WEIGHT

211-184/P/5WH: 17 lb

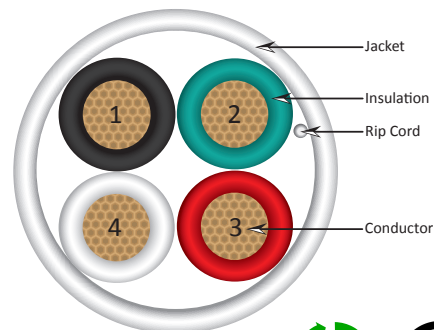

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York
713.322.7242 Texas

www.verticalcable.com

Rev. 11/2024

Specs subject to change without notice.
It is the sole responsibility of the user to have the most current specs.