

AUDIO CABLE

16 AWG 4 CONDUCTOR

STRANDED CABLE




DESCRIPTION

16 AWG 4 Conductor Stranded Bare Copper, Unshielded with an overall jacket. 500 ft, Pull Box, Black.

APPLICATION

- Sound and Audio
- Intercom Systems
- Indoor Applications

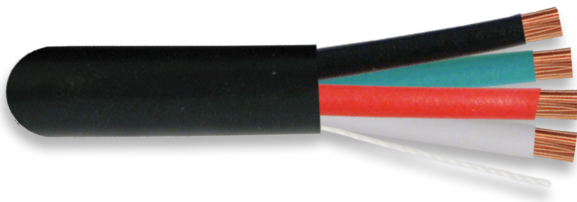

209-2316/BK

CONSTRUCTION

Conductor count: 4
Shape: Round
Rip cord: Yes

CONDUCTORS

Material: Stranded bare copper
Trade size: 16 AWG
Stranding: 65/0.16 mm
Insulation material: Polyvinyl Chloride (PVC)
Insulation O.D.: 0.08 in. (2.10 mm)
Insulation color: Red, Black, White, Green

JACKET

Material: Polyvinyl Chloride (PVC)
Thickness: 0.02 in. (0.50 mm)
O.D.: 0.25 in. (6.30 mm)
Marking: VERTICAL 5024318 c(ETL)us AUDIO CABLE
16AWG 4 COND 65 STRANDED OXYGEN
FREE CMR FT4 CL3R RoHS 500FT
004902N0422107 19:31

MECHANICAL


Temperature rating: 75° C
Aging Condition (°Cxhrs): 100x168
Tensile Strength (Mpa)
Before: ≥13.8
After: ≥85% of unaged
Aging Elongation (%):
Before: ≥100
After: ≥50% of unaged
Cold Bend (-20±2° Cx4hrs): No Crack

SAFETY

NFPA 70 (NEC®) rating: CMR/CL3
Voltage rating: 300 V RMS

PACKED WEIGHT

209-2316/BK: 27.5 lb

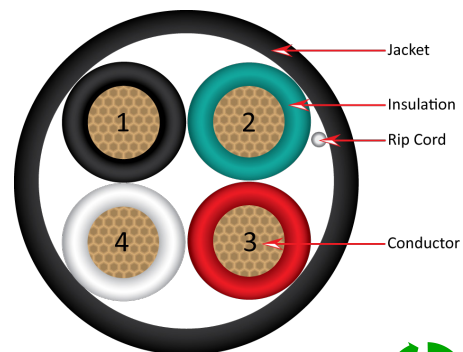

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York
713.322.7242 Texas



verticalcable.com

Rev. 12/2024
Subject to change without notice.