

# AUDIO CABLE

## 12 AWG 2 CONDUCTOR

### STRANDED CABLE



### DESCRIPTION

12 AWG 2 Conductor Stranded Bare Copper, Unshielded with an overall jacket. 500 ft, Pull Box, White.

### APPLICATION

- Sound and Audio
- Intercom Systems
- Indoor Applications



### 209-2324

#### CONSTRUCTION

Conductor count: 2  
 Shape: Round  
 Rip cord: Yes

#### CONDUCTORS

Material: Stranded bare copper  
 Trade size: 12 AWG  
 Stranding: 65/0.25 mm  
 Insulation material: Polyvinyl Chloride (PVC)  
 Insulation O.D.: 0.10 in. (2.60 mm)  
 Insulation color: Red, Black

#### JACKET

Material: Polyvinyl Chloride (PVC)  
 Thickness: 0.03 in. (0.80 mm)  
 O.D.: 0.32 in. (8.20 mm)  
 Marking: VERTICAL 5024318 c(ETL)us AUDIO CABLE  
 12AWG 2 COND 65 STRANDED OXYGEN  
 FREE CMR FT4 CL3R RoHS XXXFT  
 076211N0629207 13:28

#### MECHANICAL


Temperature rating: 75° C  
 Aging Condition (°Cxhrs): 100x168  
 Tensile Strength (Mpa)  
     Before: ≥13.8  
     After: ≥85% of unaged  
 Aging Elongation (%):  
     Before: ≥100  
     After: ≥50% of unaged  
 Cold Bend (-20±2° Cx4hrs): No Crack

#### SAFETY

NFPA 70 (NEC®) rating: CMR/CL3  
 Voltage rating: 300 V RMS

#### PACKED WEIGHT

209-2322: 35 lb

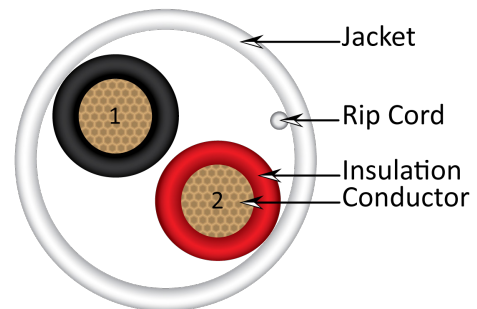

## VERTICAL CABLE

951.696.7772 California  
 800.749.2447 Florida  
 845.391.8318 New York  
 713.322.7242 Texas



verticalcable.com

Rev. 12/2024

Subject to change without notice.