

# AUDIO CABLE

## 14 AWG 2 CONDUCTOR

### STRANDED CABLE




### DESCRIPTION

**14 AWG 2 Conductor Stranded Bare Copper, Unshielded with an overall jacket. 500 ft, Pull Box, White.**

### APPLICATION

- Sound and Audio
- Intercom Systems
- Indoor Applications



### 209-2325

#### CONSTRUCTION

Conductor count: 2  
Shape: Round  
Rip cord: Yes

#### CONDUCTORS

Material: Stranded bare copper  
Trade size: 14 AWG  
Stranding: 105/0.16 mm  
Insulation material: Polyvinyl Chloride (PVC)  
Insulation O.D.: 0.10 in. (2.60 mm)  
Insulation color: Red, Black

#### JACKET

Material: Polyvinyl Chloride (PVC)  
Thickness: 0.03 in. (0.80 mm)  
O.D.: 0.25 in. (6.40 mm)  
Marking: VERTICAL 5024318 c(ETL)us AUDIO CABLE  
14AWG 2 COND 105 STRANDED  
OXYGEN FREE CMR FT4 CL3R RoHS  
076107N0629107 XXXFT

#### MECHANICAL


Temperature rating: 75° C  
Aging Condition (°Cxhrs): 100x168  
Tensile Strength (Mpa)  
Before: ≥13.8  
After: ≥85% of unaged  
Aging Elongation (%):  
Before: ≥100  
After: ≥50% of unaged  
Cold Bend (-20±2° Cx4hrs): No Crack

#### SAFETY

NFPA 70 (NEC®) rating: CMR/CL3  
Voltage rating: 300 V RMS

#### PACKED WEIGHT

209-2325: 22 lb

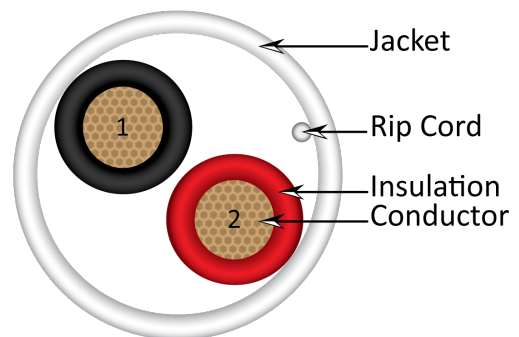

## VERTICAL CABLE

951.696.7772 California  
800.749.2447 Florida  
845.391.8318 New York  
713.322.7242 Texas



verticalcable.com

Rev. 12/2024

Subject to change without notice.