

AUDIO CABLE

10 AWG 2 CONDUCTOR

STRANDED CABLE




DESCRIPTION

10 AWG 2 Conductor Stranded Bare Copper, Unshielded with an overall jacket. 500 ft, Spool, White.

APPLICATION

- Sound and Audio
- Intercom Systems
- Indoor Applications

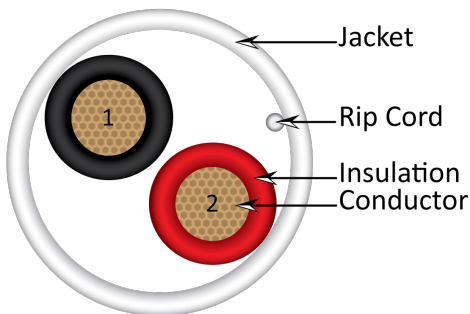

209-2335/5WH

CONSTRUCTION

Conductor count: 2
Shape: Round
Rip cord: Yes

CONDUCTORS

Material: Stranded bare copper
Trade size: 10 AWG
Stranding: 105/0.25 mm
Insulation material: Polyvinyl Chloride (PVC)
Insulation O.D.: 0.16 in. (4.10 mm)
Insulation color: Red, Black

JACKET

Material: Polyvinyl Chloride (PVC)
Thickness: 0.03 in. (0.65 mm)
O.D.: 0.37 in. (9.30 mm)
Marking: VERTICAL 4002107 c(ETL)us AUDIO CABLE
10AWG 2 COND 105 STRANDED OXYGEN
FREE CMR FT4 CL3R RoHS V2094P12583
XXXFT 87213K1006104 18:10

MECHANICAL

Temperature rating: 75° C
Aging Condition (°Cxhrs): 100x168
Tensile Strength (Mpa)
Before: ≥13.8
After: ≥85% of unaged
Aging Elongation (%):
Before: ≥100
After: ≥50% of unaged
Cold Bend (-20±2° Cx4hrs): No Crack

SAFETY

NFPA 70 (NEC®) rating: CMR/CL3
Voltage rating: 300 V RMS

PACKED WEIGHT

209-2335/5WH: 52 lb



VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York
713.322.7242 Texas



verticalcable.com

Rev. 12/2024

Subject to change without notice.