

ALARM-SECURITY CABLE

22 AWG 6 CONDUCTOR

STRANDED CONDUCTORS SHIELDED




DESCRIPTION

Alarm-Security Cable, Shielded, 22AWG, 6 Conductor, Stranded.
1000 ft, Pull Box, Grey.

FEATURES

- Ideal for Indoor Remote Control of Security, Intercom, and Sound Systems
- Can also be used for Powering Limited-Control Circuits or Burglar Alarms
- Door Controllers, Prox Sensors, Key Pads, Sound Systems, Access Control, Smoke Detectors
- PVC Outer Jacket
- Comes in a 1000 ft Pull Box

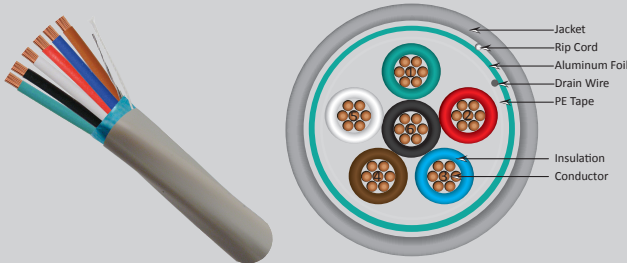

210-226ST/S/GY

TECHNICAL SPECS

Rated Temperature (°C): 75
Rated Voltage: 300

CONDUCTOR

Material: Stranded Bare Copper
Size: 22AWG
Diameter: 7 Strand (7x0.24mm)
(±.005mm)
Conductors: 6 Conductors

INSULATION

Material: PVC
Average Thickness: 0.190mm
Min Point Thickness: 0.170mm
Insulation Diameter: 1.10 (±0.05mm)
Colors: Red, Blue, Green, Yellow, Gray, Black

JACKET

Material: PVC
Average Thickness: 0.50mm
Min Point Thickness: 0.45mm
Outer Diameter: 4.80 (±0.1mm)
Rip Cord: Yes
PE Tape: Yes
Drain Wire (TC): 7/0.20
Aluminum Foil: Yes
Color: Gray White
Assembly Diameter: 3.30 (±0.1mm)
Marking: VERTICAL 5024318 c(ETL)us CM/CL2
22AWG 6C STRANDED SHIELDED 75C
SUN RES RoHS 116212N0919208 18:00
XXXXFT

MECHANICAL CHARACTERISTICS

Test Object: Jacket
Test Material: PVC
Aging Condition (°Cxhrs): 100x168
Tensile Strength (Mpa)
Before: ≥13.8
After: ≥85% of unaged
Elongation (%)
Before: ≥100
After: ≥50% of unaged

PACKED WEIGHT

210-226ST/S/GY: 28 lb

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York
713.322.7242 Texas



www.verticalcable.com

Rev. 11/2024

Subject to change without notice