

# ALARM-SECURITY CABLE

## 22 AWG 6 CONDUCTOR

## STRANDED CONDUCTORS SHIELDED




### DESCRIPTION

Alarm-Security Cable, Shielded, 22AWG, 6 Conductor, Stranded.  
1000 ft, Pull Box, White.

### FEATURES

- Ideal for Indoor Remote Control of Security, Intercom, and Sound Systems
- Can also be used for Powering Limited-Control Circuits or Burglar Alarms
- Door Controllers, Prox Sensors, Key Pads, Sound Systems, Access Control, Smoke Detectors
- PVC Outer Jacket
- Comes in a 1000ft Pull Box

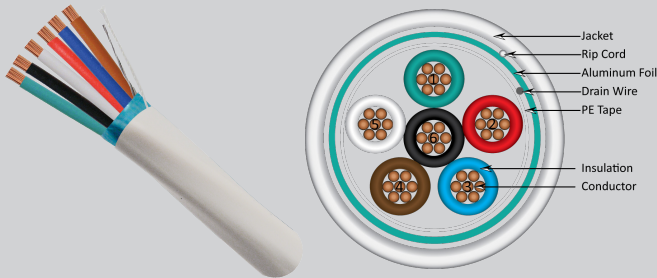

### 210-226ST/S/WH

#### TECHNICAL SPECS

Rated Temperature (°C): 75  
Rated Voltage: 300

#### CONDUCTOR

Material: Stranded Bare Copper  
Size: 22AWG  
Diameter: 7 Strand (7x0.24mm) (±.005mm)  
Conductors: 6 Conductors

#### INSULATION

Material: PVC  
Average Thickness: 0.190mm  
Min Point Thickness: 0.170mm  
Insulation Diameter: 1.10 (±0.05mm)  
Colors: Red, Blue, Green, Yellow, Gray, Black

#### JACKET

Material: PVC  
Average Thickness: 0.50mm  
Min Point Thickness: 0.45mm  
Outer Diameter: 4.80 (±0.1mm)  
Rip Cord: Yes  
PE Tape: Yes  
Drain Wire (TC): 7/0.20  
Aluminum Foil: Yes  
Color: Gray White  
Assembly Diameter: 3.30 (±0.1mm)  
Marking: VERTICAL 5024318 c(ETL)us CM/CL2  
22AWG 6C STRANDED SHIELDED 75C  
SUN RES RoHS 116212N0919208 18:00  
XXXXFT

#### MECHANICAL CHARACTERISTICS

Test Object: Jacket  
Test Material: PVC  
Aging Condition (°Cxhrs): 100x168  
Tensile Strength (Mpa)  
Before: ≥13.8  
After: ≥85% of unaged  
Elongation (%)  
Before: ≥100  
After: ≥50% of unaged

#### PACKED WEIGHT

210-266ST/S/WH: 28 lb

## VERTICAL CABLE

951.696.7772 California  
800.749.2447 Florida  
845.391.8318 New York  
713.322.7242 Texas



[www.verticalcable.com](http://www.verticalcable.com)

Rev. 11/2024

Subject to change without notice