

ALARM-SECURITY CABLE

14 AWG 4 CONDUCTOR

STRANDED PLENUM RATED




DESCRIPTION

14 AWG 4 Conductor Stranded Bare Copper, CL3P, Unshielded with an overall jacket. 1000 ft, Wooden Spool, White

APPLICATION

- Intercom Systems
- Security Systems
- Sound and Audio
- Power Limited Control Circuits
- Indoor Applications
- Door Controllers
- Key Pads
- Smoke Detectors

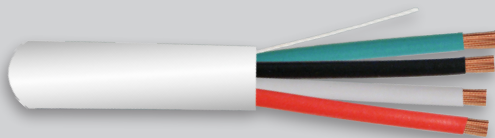

211-144/P/WH

CONSTRUCTION

Conductor count: 4
Shape: Round
Rip cord: Yes

CONDUCTORS

Material: Stranded bare copper
Trade size: 14 AWG
Stranding: 19 Strand
Strand Diameter: 0.02 in (0.47 mm)
Insulation material: Polyvinyl Chloride (PVC)
Insulation O.D.: 0.04 in. (1.10 mm)
Insulation color: Red, Black, Green, White

JACKET

Material: Polyvinyl Chloride (PVC)
Thickness: 0.02 in. (0.46 mm)
O.D.: 0.24 in. (6.20 mm)
Marking: 14AWG 4C STRANDED c(ETL)us CMP 5024318
RoHS/FT6/CL3P 097801N0810101 18:07 XXXXFT

MECHANICAL


Temperature rating: 75° C

SAFETY

NFPA 70 (NEC®) rating: CMP/CL3P
Voltage rating: 300 V RMS
DC Resistance per Conductor: @ 20° C 2.6Ω/1m'
Maximum pulling tension: 168lbs
Min. Bend Radius: 2vw .6 in

PACKED WEIGHT

211-144/P/WH: 67.4 lb

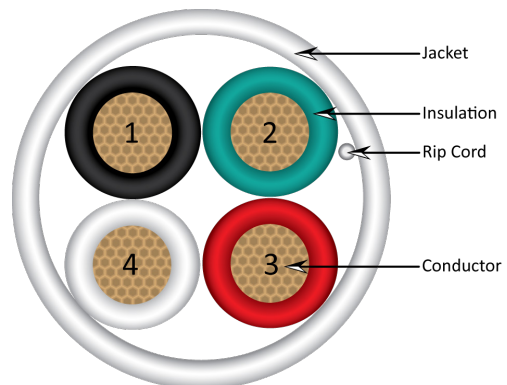

VERTICAL CABLE

951.696.7772 California

800.749.2447 Florida

845.391.8318 New York

713.322.7242 Texas

www.verticalcable.com

Rev. 12/2024

Subject to change without notice.