

# ALARM-SECURITY CABLE

## 16 AWG 4 CONDUCTOR STRANDED PLENUM RATED (SHIELDED)




### DESCRIPTION

16 AWG 4 Conductor Stranded Bare Copper, CL3P, Shielded with an overall jacket. 1000 ft, Wooden Spool, White

### APPLICATION

- Intercom Systems
- Security Systems
- Sound and Audio
- Power Limited Control Circuits
- Indoor Applications
- Door Controllers
- Key Pads
- Smoke Detectors

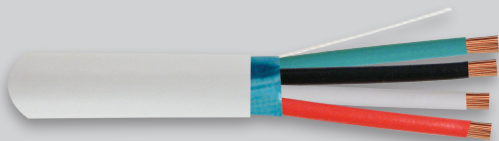

### 211-164/S/P/WH

#### CONSTRUCTION

Conductor count: 4  
Shape: Round  
Rip cord: Yes

#### CONDUCTORS

Material: Stranded bare copper  
Trade size: 16 AWG  
Stranding: 19 Strand  
Strand Diameter: 0.02 in (0.47 mm)  
Insulation material: Polyvinyl Chloride (PVC)  
Insulation O.D.: 0.07 in. (1.90 mm)  
Insulation color: Red, Black, White, Green

#### JACKET

Material: Polyvinyl Chloride (PVC)  
Thickness: 0.01 in. (0.38 mm)  
O.D.: 0.20 in. (5.20 mm)  
Marking: 16AWG 4C STRANDED SHIELDED  
c(ETL)us CMP 5024318 RoHS/FT6/CL3P  
19709N0403101 06:58 XXXXFT

#### MECHANICAL


Temperature rating: 75° C

#### SAFETY

NFPA 70 (NEC®) rating: CMP/CL3P  
Voltage rating: 300 V RMS  
DC Resistance per Conductor: @ 20° C 4.2Ω/1m'  
Maximum pulling tension: 168lbs  
Min. Bend Radius: 2vw .6 in

#### PACKED WEIGHT

211-164/S/P/WH: 47.7 lb

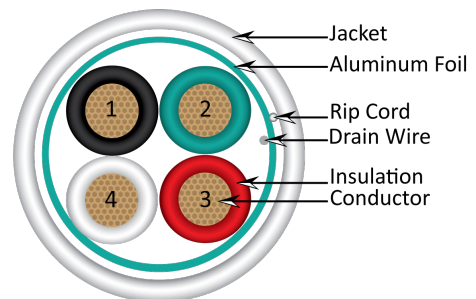

## VERTICAL CABLE

951.696.7772 California  
800.749.2447 Florida  
845.391.8318 New York  
713.322.7242 Texas



[www.verticalcable.com](http://www.verticalcable.com)

Rev. 12/2024

Subject to change without notice.