

ALARM-SECURITY CABLE

18 AWG 3 CONDUCTOR
STRANDED (SHIELDED)





DESCRIPTION

18 AWG 3 Conductor Stranded Bare Copper,
Shielded with an overall jacket.
500 ft, Pull Box, White

APPLICATION

- Intercom Systems
- Security Systems
- Sound and Audio
- Power Limited Control Circuits
- Indoor Applications
- Door Controllers
- Key Pads
- Smoke Detectors

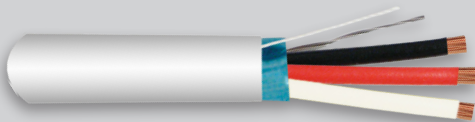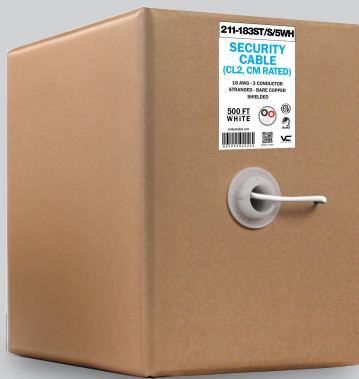

211-183ST/S/5WH

CONSTRUCTION

Conductor count:	3
Shape:	Round
Rip cord:	Yes
PE Tape:	Yes
Drain Wire (TC):	7/0.20
Aluminum Foil:	Yes

CONDUCTORS

Material:	Stranded bare copper
Trade size:	18 AWG
Stranding:	16/0.24 mm
Strand Diameter:	0.02 in (0.47 mm)
Insulation material:	Polyvinyl Chloride (PVC)
Insulation O.D.:	0.07 in. (1.7 mm)
Insulation color:	Red, Black, White

JACKET

Material:	Polyvinyl Chloride (PVC)
Thickness:	0.02 in. (0.5 mm)
O.D.:	0.20 in. (5.0 mm)
Marking:	Vertical 4001453 cETLus CM/CL2 18AWG 3C STRANDED SHIELDED 75C RoHS V1379P12980 XXXFT

MECHANICAL


Temperature rating:	75° C
---------------------	-------

SAFETY

Voltage rating:	300 V RMS
-----------------	-----------

PACKED WEIGHT

211-183ST/S/5WH:	14.75 lb
------------------	----------

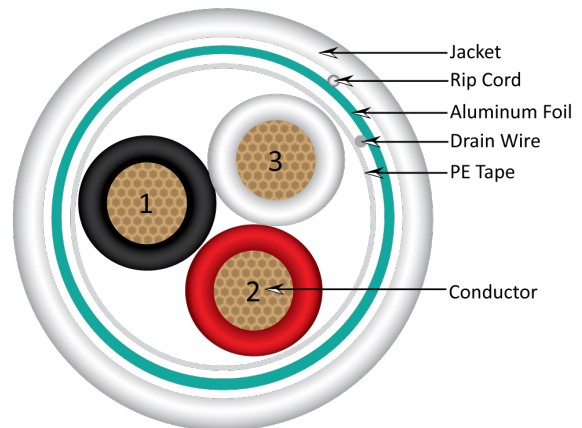

VERTICAL CABLE

951.696.7772 California

800.749.2447 Florida

845.391.8318 New York

713.322.7242 Texas



www.verticalcable.com

Rev. 12/2024

Subject to change without notice.