

# ALARM-SECURITY CABLE

## 22 AWG 2 CONDUCTOR

### SOLID CONDUCTORS



## DESCRIPTION

22 AWG 2 Conductor Solid Bare Copper, Unshielded with an overall jacket, Coil Pack, 500 ft, White

## APPLICATION

- Intercom Systems
- Security Systems
- Sound and Audio
- Power Limited Control Circuits
- Indoor Applications
- Door Controllers
- Key Pads
- Smoke Detectors



## 212-222SO/5WH

### CONSTRUCTION

|                  |       |
|------------------|-------|
| Conductor count: | 2     |
| Shape:           | Round |
| Rip cord:        | Yes   |

### CONDUCTORS

|                      |                          |
|----------------------|--------------------------|
| Material:            | Bare solid copper        |
| Trade size:          | 22 AWG                   |
| Conductor O.D.:      | 0.02 in. (0.61 mm)       |
| Insulation material: | Polyvinyl Chloride (PVC) |
| Insulation O.D.:     | 0.04 in. (0.96 mm)       |
| Insulation color:    | Red, Black               |

### JACKET

|            |  |
|------------|--|
| Material:  | Polyvinyl Chloride (PVC)   |
| Thickness: | 0.02 in. (0.45 mm)   |
| O.D.:      | 0.1 in. (2.80 mm)  |
| Marking:   | VERTICAL 4001453 cETLUS CM/CL2<br>22AWG 2C SOLID 75C RoHS<br>V1379P12980 XXXFT |

### MECHANICAL


|                     |       |
|---------------------|-------|
| Temperature rating: | 75° C |
|---------------------|-------|

### SAFETY

|                        |           |
|------------------------|-----------|
| NFPA 70 (NEC®) rating: | CM/CL2    |
| Voltage rating:        | 300 V RMS |

### PACKED WEIGHT

|                |        |
|----------------|--------|
| 212-222SO/5WH: | 3.7 lb |
|----------------|--------|

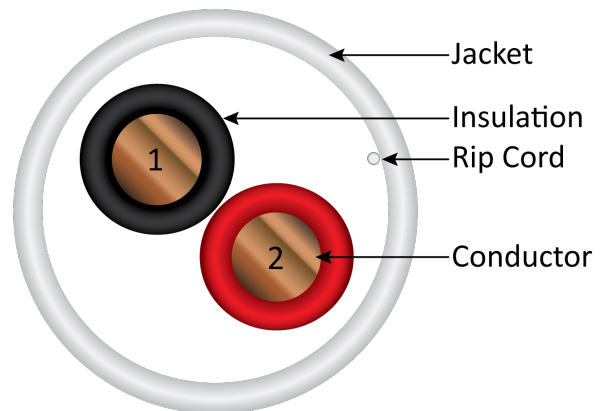

## VERTICAL CABLE

951.696.7772 California  
800.749.2447 Florida  
845.391.8318 New York  
713.322.7242 Texas



[www.verticalcable.com](http://www.verticalcable.com)

Rev. 12/2024  
Subject to change without notice.