



DESCRIPTION

22 AWG 2 Conductor Stranded Bare Copper,
Unshielded with an overall jacket,
Coil Pack, 500 ft, White

APPLICATION

- Intercom Systems
- Security Systems
- Sound and Audio
- Power Limited Control Circuits
- Indoor Applications
- Door Controllers
- Key Pads
- Smoke Detectors



ALARM-SECURITY CABLE

22 AWG 2 CONDUCTOR STRANDED CABLE

212-222ST/5WH

CONSTRUCTION

Conductor count:	2
Shape:	Round
Rip cord:	Yes

CONDUCTORS

Material:	Stranded bare copper
Trade size:	22 AWG
Stranding:	16/0.24 mm
Insulation material:	Polyvinyl Chloride (PVC)
Insulation O.D.:	0.04 in. (1.10 mm)
Insulation color:	Red, Black

JACKET

Material:	Polyvinyl Chloride (PVC)
Thickness:	0.02 in. (0.45 mm)
O.D.:	0.12 in. (3.10 mm)
Marking:	VERTICAL 5024318 c(ETL)us CMR/CL2R 22AWG 2C STRANDED 75C SUN RES RoHS 22710N0403103 05:09 XXXFT

MECHANICAL


Temperature rating:	75° C
---------------------	-------

SAFETY

NFPA 70 (NEC®) rating:	CM/CL2
Voltage rating:	300 V RMS

PACKED WEIGHT

212-222ST/5WH:	7 lb
----------------	------

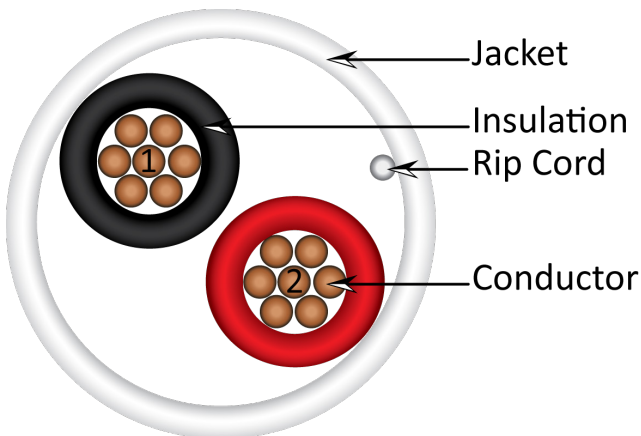

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York
713.322.7242 Texas



www.verticalcable.com

Rev. 12/2024
Subject to change without notice.