

CAT5E DIRECT BURIAL CABLE

CMX / WATERPROOF / UV-RESISTANT

24 AWG 8 CONDUCTOR (UNSHIELDED)



DESCRIPTION

350 MHz CAT5E, CMX / Outdoor Jacket, Direct Burial / Waterproof 4 Unshielded Twisted Pairs (UTP), 8 24-AWG Solid Bare Copper Conductors. 1000 ft.

FEATURES

- Supports 10/100/1000BASE-T applications
- Outdoor UV-resistant jacket
- Direct Burial / Waterproof Dual Jacket
- 350-MHz bandwidth supporting wide range of applications
- 24 AWG Solid Copper Conductors
- Easily identifiable pair insulation colors
- Exceeds ANSI/TIA-568.2-D and ISO/IEC 11801 specifications
- CAN/CSA-C22.2 No. 214, RoHS compliant
- ETL listed



059-486/US/CMXT

TRANSMISSION PERFORMANCE

Meets or exceeds ANSI/TIA-568.2-D and ISO/IEC 11801 specifications

CONSTRUCTION

Pairs: 4
Conductors: 8
Rip Cord: 1
Screen: Unscreened (UTP)

CONDUCTORS

Material: Solid Bare Annealed Copper
Size: 24 AWG

INSULATION

Material: PE
Diameter: 0.04 in. (0.91 mm)
Average thickness: 0.0078 in (0.20 mm)
Min. point thickness: 0.0074 in. (0.19 mm)
Color coding:
Pair 1: White-Blue/Blue
Pair 2: White-Orange/Orange
Pair 3: White-Green/Green
Pair 4: White-Brown/Brown

JACKET

Material: Low Smoke Zero Halogen (LSZH)
Outdoor rating: UV-resistant
Outer diameter: 0.20 in. (5.10 mm)
Average thickness: 0.0236 in. (0.60 mm)
Min. point thickness: 0.0212 in. (0.54 mm)
Marking: VERTICAL 4001453 cETLus VERIFIED CMX UTP 4PR 24AWG OUTDOOR DIRECT BURIAL (DRY) UV LSZH CAT5E 350MHz ANSI/TIA-568.2-D RoHS XXXXFT

ELECTRICAL

Voltage rating: 60 VRMS

MECHANICAL

Before Tensile Strength (Mpa): ≥ 13.8 MPa
Elongation After Aging (%): ≥ 100
Aging Conditions ($^{\circ}\text{C} \times \text{h}$): 100x168
Tensile Strength After Aging (Mpa): $\geq 85\%$ of unaged
Elongation After Aging (%): $\geq 50\%$ of unaged
Cold Bend ($-40 \pm 2^{\circ}\text{C} \times 4\text{hrs}$): No Crack

SAFETY


FPA 70 (NEC®) fire rating: CMX

ENVIRONMENTAL

Operating temperature: $-40^{\circ}\text{F} - 167^{\circ}\text{F}$ ($-40^{\circ}\text{C} - 75^{\circ}\text{C}$)

WEIGHT

30 lb

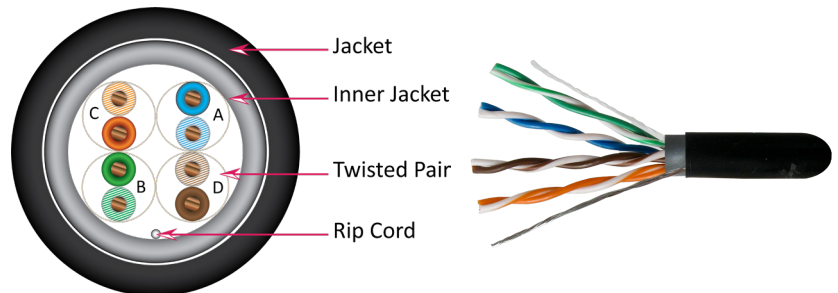

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York
713.322.7242 Texas



verticalcable.com

Rev. 01/2025

Subject to change without notice.