

ACCESS CONTROL CABLE (CMP/CL3P) 22-AWG/3P (SHIELDED) + 18-AWG/4C + 22-AWG/4C + 22-AWG/2C



VERTICAL CABLE
Simply Connect.

DESCRIPTION

Access Control Panel Cable, CMP/CL3P Rated,
3P x 22-AWG Shielded / 4 x 18-AWG / 4 x 22-AWG /
2 x 22-AWG, Stranded Bare Copper Conductors. 1000 ft.

FEATURES

- 4 Component Access Control Cable
- For Access Control Panels, Security Panels, Card Readers, Sensors, Keypads, Power, Microphones, Speakers, Alarm Systems
- 3 Pair x 22-AWG / 4 x 18-AWG / 4 x 22-AWG / 2 x 22-AWG Stranded Bare Copper Conductors
- Each component contains individual rip cord
- Exceeds ANSI/TIA-568.2-D and ISO/IEC 11801 specifications
- CAN/CSA-C22.2 No. 214, RoHS compliant
- CMP/CL3P Overall Plenum Rated Jacket
- ETL listed



214-2333/P/YL1K

TRANSMISSION PERFORMANCE

Meets or exceeds ANSI/TIA-568.2-D and ISO/IEC 11801 specifications

CONSTRUCTION

Conductor Material: Stranded Bare Copper
Rip Cord: x5 (Nylon)

COMPONENT 1 (3P x 22-AWG)

Conductors: 3 Twisted Pairs / 6 Conductors
Insulation Thickness: 0.0075 in. (0.19 mm)
Insulation Outer Diameter: 0.0433 in. (1.10 mm)
Insulation Material: Flame Retardant Polyvinyl Chloride (FR-PVC)


Jacket Color: White with Yellow Stripe
Screen: Foiled

Drain Wire (Tinned Copper): 0.0157 in. (0.40 mm)
Insulation Color Coding: Pair 1: Black & Red
Pair 2: White & Green
Pair 3: Brown & Orange
Jacket Thickness: 0.0197 in. (0.38 mm)
Outer Diameter: 0.2125 in. (4.50 mm)
Jacket Material: Flame Retardant Polyvinyl Chloride (FR-PVC)
Jacket Marking: CARD READER 22AWG 3P

COMPONENT 2 (4 x 18-AWG)

Conductors: 4 Conductors
Jacket Color: White with Purple Stripe
Insulation Color Coding: Black, Red, White, Green
Insulation Material: Flame Retardant Polyvinyl Chloride (FR-PVC)
Insulation Thickness: 0.0118 in. (0.30 mm)
Insulation Outer Diameter: 0.0598 in. (1.52 mm)
Jacket Thickness: 0.0150 in. (0.38 mm)
Outer Diameter: 0.1850 in. (4.70 mm)
Jacket Material: Low Smoke Flame Retardant Polyvinyl Chloride (FR-PVC)
Jacket Marking: LOCK POWER 18 AWG 4C

CONTINUED ON NEXT PAGE...

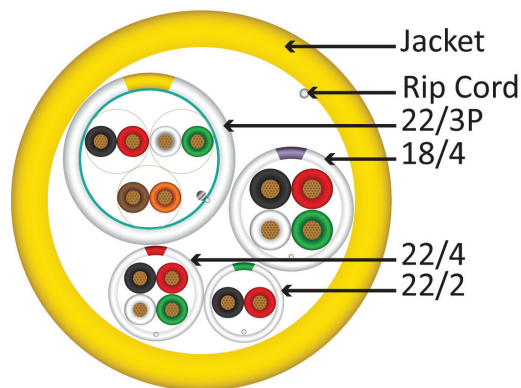

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York
713.322.7242 Texas



verticalcable.com

Rev. 02/2025

Subject to change without notice.

ACCESS CONTROL CABLE (CMP/CL3P) 22-AWG/3P (SHIELDED) + 18-AWG/4C + 22-AWG/4C + 22-AWG/2C

CONTINUED FROM PREVIOUS PAGE...

COMPONENT 3 (4 x 22-AWG)

Conductors:	4 Conductors
Jacket Color:	White with Red Stripe
Insulation Color Coding:	Black, Red, White, Green
Insulation Material:	Low Smoke Flame Retardant Polyvinyl Chloride (FR-PVC)
Insulation Thickness:	0.0075 in. (0.19 mm)
Insulation Outer Diameter:	0.0433 in. (1.10 mm)
Jacket Thickness:	0.0150 in. (0.38 mm)
Outer Diameter:	0.1456 in. (3.70 mm)
Jacket Material:	Low Smoke Flame Retardant Polyvinyl Chloride (FR-PVC)
Jacket Marking:	REX SPARE 22AWG 4C

COMPONENT 4 (2 x 22-AWG)

Conductors:	2 Conductors
Jacket Color:	White with Green Stripe
Insulation Color Coding:	Black, Red
Insulation Material:	Polyvinyl Chloride (PVC)
Insulation Thickness:	0.0075 in. (0.19 mm)
Insulation Outer Diameter:	0.0433 in. (1.10 mm)
Jacket Thickness:	0.0150 in. (0.38 mm)
Outer Diameter:	0.1181 in. (3.00 mm)
Jacket Material:	Low Smoke Flame Retardant Polyvinyl Chloride (FR-PVC)
Jacket Marking:	DOOR CONTACT 22AWG 2C

OVERALL JACKET

Material:	Low Smoke Flame Retardant Polyvinyl Chloride (FR-PVC)
Outer Diameter:	0.41 in. (10.50 mm)
Average Thickness:	0.0228 in. (0.58 mm)
Marking:	ACCESS CONTROL CABLE E507553 CL3P (UL) 75°C 22/3P SHLD + 18/4 + 22/2C + 22/4C RoHS COMPLIANT XXXXFT

ELECTRICAL

Voltage Rating:	300 VRMS
DCR:	18-AWG 6.66 Ω /1000 FT (21.9 Ω /km) 22-AWG 16.9 Ω /1000 FT (55.4 Ω /km)
Capacitance:	18-AWG 770 pF/km 22-AWG 596 pF/km

MECHANICAL

Before Tensile Strength (Mpa):	≥ 13.8
Aging Elongation (%):	≥ 100
Aging Condition ($^{\circ}$ Cxhrs):	100x168
After Tensile Strength (Mpa):	$\geq 85\%$ of unaged
Aging Elongation (5):	$\geq 50\%$ if unaged
Cold Bend ($-20 \pm 2^{\circ}$ Cx4hrs):	No Crack

ENVIRONMENTAL

Operating temperature:	-4 $^{\circ}$ F–167 $^{\circ}$ F (-20 $^{\circ}$ C–75 $^{\circ}$ C)
------------------------	---

WEIGHT

214-2333/P/YL1K:	109 lb (49 kg)
------------------	----------------

VERTICAL CABLE
951.696.7772 California
800.749.2447 Florida
845.391.8318 New York
713.322.7242 Texas



verticalcable.com

Rev. 02/2025

Subject to change without notice.