

RG11 STANDARD SHIELD

14 AWG

COAXIAL CABLE (CM-RATED)



DESCRIPTION

RG11, Standard Shield,
14 AWG Solid CCS Conductor,
Aluminum Foil with 60% Braid.

FEATURES

- Digital HDTV Applications
- Digital Satellite Installations
- CATV



107-1032BK/R11

CONSTRUCTION

Conductor count:	1
Shape:	Round
Gel Filling:	Yes
Braid:	60% Aluminum
Aluminum Foil:	Yes

CONDUCTORS

Material:	Copper Clad Steel
Trade size:	14 AWG
Insulation material:	Dielectric Foam PE
Insulation O.D.:	0.28 in. (7.11 mm)
Insulation color:	White

JACKET

Material:	Polyvinyl Chloride (PVC)
O.D.:	0.39 in. (10.0 mm)
Marking:	RG11 14AWG CABLE 3.0GHz CMX CATV ROHS ETL VERIFIED V2094P13541 XXXXFT

MECHANICAL


Temperature rating:	75° C
Sparker Test:	4000VAC
Impedance:	75 Ohm
Loaded:	20X Diameter
Unloaded:	10X Diameter
Velocity of Propagation:	85%
Return Loss:	23 dB Min (5-2300 MHz)

SAFETY

NFPA 70 (NEC®) rating:	CL2
Voltage rating:	300 V RMS

PACKED WEIGHT

107-1032BK/R11:	60 lb (27.2 kg)
-----------------	-----------------

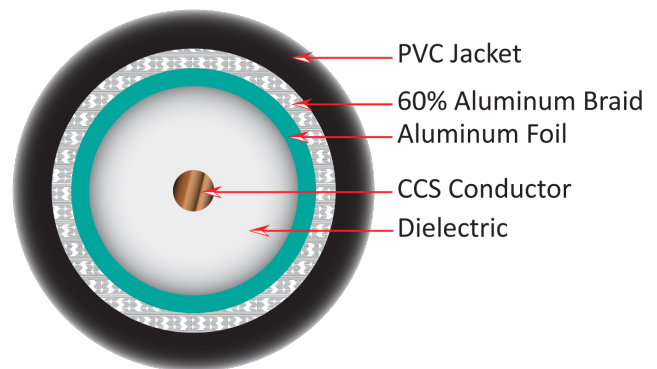

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York
713.322.7242 Texas



verticalcable.com

Rev. 03/2025

Subject to change without notice.