


Cable Management Bars - General Purpose

- 266-CFM00-2A3 Cable Management Bar, General Purpose, 3-in Deep, Basic Width
- 266-CFM00-2A4 Cable Management Bar, General Purpose, 4-in Deep, Basic Width
- 266-CFM00-2A2A Cable Management Bar, General Purpose, 2-in Deep, Extended

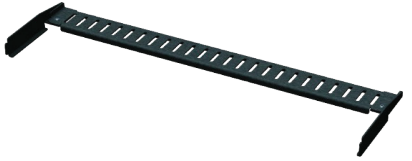


KITTING

- As delivered:
- 1 x cable management bar, folded;
 - 1 x shipping box.
- Not included:
- cable ties.

Cable Management Bars - Optical Fiber

- 266-CFM00-2B3 Cable Management Bar, Optical Fiber, 3-in Deep, Basic Width
- 266-CFM00-2B4 Cable Management Bar, Optical Fiber, 4-in Deep, Basic Width

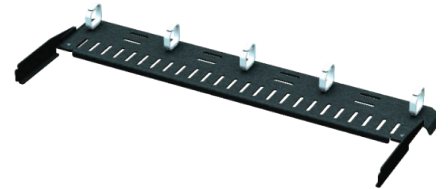

KITTING

- As delivered:
- 1 x cable management bar, folded;
 - 5 x cable/fiber management rings;
 - 1 x shipping box.
- Not included:
- cable ties.

COMPATIBILITY

266-CFM00-2Axx (Basic)			266-CFM00-2AxxA (Extended)
266-PMD01-2A3A	266-PKM02-24xxx 266-PKM03-24xxx	266-PKM02-D8xxx 266-PKM03-D8xxx	266-PKM04-24xxx

CHARACTERISTICS

	General Purpose			Optical Fiber	
	266-CFM00-2A3 3-inch	266-CFM00-2A4 4-inch	266-CFM00-2A2A 2-inch	266-CFM-2B3 3-inch	266-CFM-2B4 4-inch
Materials:	1.5-mm (16-GA) CRS; black powder coating.				
Width:	430 mm (16.9 in)		440 mm (17.3 in)	430 mm (16.9 in)	
Height:	25 mm (1.0 in)				
Depth, clearance:	75 mm (3.0 in)	100 mm (4.0 in)	50 mm (2.0 in)	75 mm (3.0 in)	100 mm (4 in)
Depth, overall:	115 mm (4.5 in)	140 mm (5.5 in)	95 mm (3.7 in)	160 mm (6.3 in)	190 mm (7.5 in)
Shipping dimensions:	Foldable design W:470 mm (18.7 in); D:42 mm (1.7 in); H:25 mm (1.0 in)		Foldable design W:475 mm (18.7 in); D:42 mm (1.7 in); H:25 mm (1.0 in)	Foldable design W:470 mm (18.7 in); D:42 mm (1.7 in); H:25 mm (1.0 in)	
Weight:	270 g (9.5 oz)	325 g (11.5 oz)	270 g (9.5 oz)	480 g (16.9 oz)	530 g (18.7 oz)

Cable management ring capacity:

