



RG6 QUAD SHIELD

18 AWG COAXIAL CABLE

DIRECT BURIAL (CM-RATED)

107-1952/DB/6Q

CONSTRUCTION

Conductor count:	1
Shape:	Round
Braid:	60% & 40% Aluminum
Gel Filling:	Yes
Aluminum Foil:	Yes
Aluminum Foil Shield:	Bonded

CONDUCTORS

Material:	Copper Clad Steel
DC Resistance:	(<) 120 Ohms/km
Trade size:	18 AWG
Insulation material:	Dielectric Foam PE
Insulation O.D.:	0.18 in. (4.60 mm)
Insulation color:	White

JACKET

Material:	Polyethylene (PE)
O.D.:	0.30 in. (7.50 mm)
Marking:	RG6 QUAD 18AWG DIRECT BURIAL CABLE 3.0GHZ CMX CATV ROHS ETL VERIFIED V2094P14099 XXXXFT 146702N0924101 06:46

MECHANICAL

Temperature rating:	75° C
Sparker Test:	3000VAC
Impedance:	75 Ohm
Capacitance:	52 pF/m
Velocity of Propagation:	85%
Return Loss:	23 dB Min (5-2300 MHz)
Bending Radius MINI.:	2.72 in. (69 mm)

SAFETY

NFPA 70 (NEC®) rating:	CMX/CL2
Voltage rating:	300 V RMS

PACKED WEIGHT



107-1952/DB/6Q:	35 lb (15.9 kg)
-----------------	-----------------

DESCRIPTION

RG6 Quad Shield,
18 AWG Solid CCS Conductor,
Aluminum Foil with 60% & 40% Braids.

FEATURES

- Fully Sweep-Tested to 3000MHz
- 18AWG Solid Copper-Clad Steel
- Polyethylene (PE) CMX/CL2 Rated Jacket
- Direct Burial (Gel Filled)
- ETL, RoHS Compliant
- Supplied in 1000ft Wood Spool

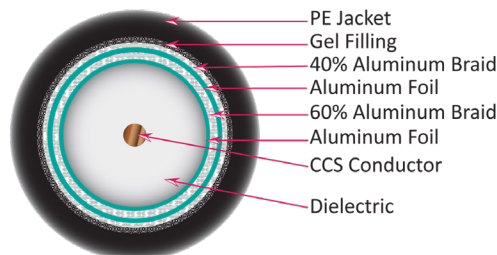

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York
713.322.7242 Texas



verticalcable.com

Rev. 04/2025

Subject to change without notice.