

RG59 SIAMESE

20 AWG COAXIAL CABLE (95% BRAID) (CM-RATED)
18 AWG STRANDED POWER CABLES



DESCRIPTION

RG59 Siamese, 20 AWG Solid Bare Copper,
95% Copper Clad Aluminum Braid,
18 AWG Stranded Bare Copper Unshielded

FEATURES

- RG59 Type Coaxial Cable
- One Pair of 18AWG Power Cables
- 20AWG Solid Copper Conductor
- Indoor Cable Application
- Compliance and Certification
- 1000 ft Wooden Spool



107-2179/BK

CONSTRUCTION

Conductor count:	3
Shape:	Round
Braid:	95% Copper Clad Aluminum

CONDUCTORS

Inter Conductor:	Solid Bare Copper
Power Cable:	Stranded Bare Copper
DC Resistance:	(<) 120 Ohms/km
Trade size:	20 AWG/18 AWG
Insulation material:	Dielectric Foam PE
Insulation O.D.:	0.14 in. (3.66 mm)
Insulation color:	White

JACKET

Material:	Polyvinyl Chloride (PVC)
O.D.:	0.24 in. (6.10 mm)
Marking:	c(ETL)us 4002107 CM RG59/U BC 20AWG CCTV SIAMESE CABLE +18/2 CM/X/G FT4 CL2 RoHS V2094P12994 XXXXFT

MECHANICAL


Temperature rating:	75° C
Sparker Test:	3000VAC
Impedance:	75 Ohm
Capacitance:	53 pF/m
Velocity of Propagation:	85%
Bending Radius MINI.:	2.72 in. (69 mm)
Return Loss:	22 dB Min (5-470 MHz) 20 dB Min (470-1000MHz)

SAFETY

NFPA 70 (NEC®) rating:	CMX/CL2
Voltage rating:	300 V RMS

PACKED WEIGHT

107-2179/BK:	50 lb (22.7 kg)
--------------	-----------------

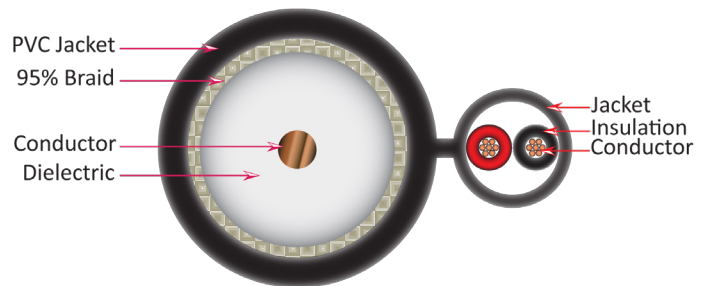

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York
713.322.7242 Texas



verticalcable.com

Rev. 04/2025

Subject to change without notice.