

ALARM-SECURITY CABLE

22 AWG 2 CONDUCTORS

STRANDED




DESCRIPTION

22 AWG 2 Conductor Stranded Bare Copper, CM/CL2, Unshielded with an overall jacket.

FEATURES

- 22 AWG Stranded Copper Conductors
- Unshielded Twisted Pair (UTP) Design
- PVC Jacket in Grey & White
- CL3 Rated
- Rip Cord Included
- High Strand Count
- Convenient Packaging

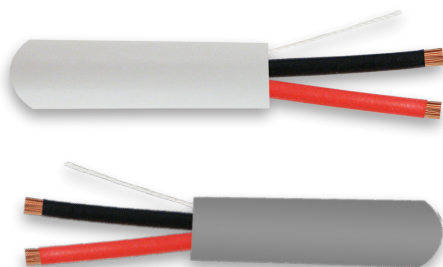

210-222ST SERIES

Part Number:	Description:
210-222ST/5GY	Security Cable, Stranded, Unshielded, 22 AWG 2 C, Gray 500 ft.
210-222ST/WH	Security Cable, Stranded, Unshielded, 22 AWG 2 C, White 1000 ft.
210-222ST/GY	Security Cable, Stranded, Unshielded, 22 AWG 2 C, Gray 1000 ft.

CONSTRUCTION

Conductor count:	2
Shape:	Round
Rip cord:	Yes

CONDUCTORS

Material:	Stranded Bare copper
Trade size:	22 AWG
Conductor O.D.:	0.02 in. (0.61 mm)
Insulation material:	Polyvinyl Chloride (PVC)
Insulation O.D.:	0.04 in. (1.10 mm)
Insulation color:	Red, Black

JACKET

Material:	Polyvinyl Chloride (PVC)
Thickness:	0.02 in. (0.45 mm)
O.D.:	0.1 in. (3.10 mm)
Marking:	VERTICAL 4001453 cETLUS CM/CL2 22AWG 2C STRANDED 75C RoHS V1379P13404 XXXXFT

MECHANICAL



Temperature rating:	75° C
---------------------	-------

SAFETY

NFPA 70 (NEC®) rating:	CM/CL2
Voltage rating:	300 V RMS

PACKED WEIGHT

210-222ST/5GY	6 lb (2.7 kg)
210-222ST/WH	10 lb (4.5 kg)
210-222ST/GY	10 lb (4.5 kg)

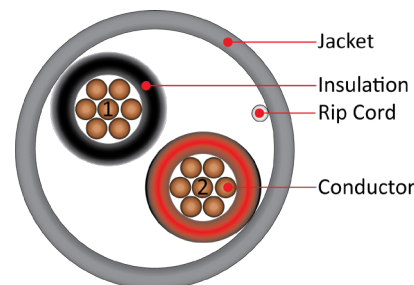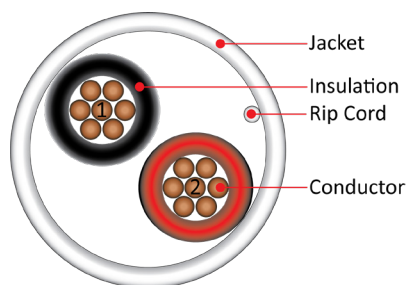

VERTICAL CABLE
 951.696.7772 California
 800.749.2447 Florida
 845.391.8318 New York
 713.322.7242 Texas



verticalcable.com

Rev. 04/2025

Subject to change without notice.