

ALARM-SECURITY CABLE

22 AWG 2 CONDUCTOR

STRANDED (PLENUM-RATED)



DESCRIPTION

22/2 Stranded Bare Copper Conductors, Unshielded with an overall jacket. Plenum Rated, 1000 ft Pull Box

FEATURES

- 22 AWG, 2-Conductor Stranded Bare Copper
- Plenum-Rated (CMP) Unshielded Construction
- Rip Cord Included
- Color-Coded Conductors (Black, Red)
- 1000 ft Pull Box
- ETL listed, RoHS compliant, FT6 flame-rated, CL3P.



210-222/P/WH

CONSTRUCTION

Conductor count:	2
Stranding:	7 Strand 0.01 in. (7x0.25±0.01 mm)
Shape:	Round
Rip cord:	Yes

CONDUCTORS

Material:	Stranded bare copper
Trade size:	22 AWG
Insulation material:	Polyvinyl Chloride (PVC)
Insulation O.D.:	0.05 in. (1.15±0.1 mm)
Avg. Thickness:	0.01 in. (0.20 mm)
Min. Thickness:	0.01 in. (0.18 mm)
Insulation color:	Black, Red

JACKET

Material:	Polyvinyl Chloride (PVC)
O.D.:	0.12 in. (3.10±0.20 mm)
Avg. Thickness:	0.01 in. (0.38 mm)
Min. Thickness:	0.01 in. (0.30 mm)
Color:	White
Marking:	22AWG 2C STRANDED c(ETL)us CMP 5024318 RoHS/FT6/CL3P 22730500119103 02:19 XXXXFT

MECHANICAL


Temperature rating:	-20°C ~ +75°C
---------------------	---------------

SAFETY

Nom. DCR Conductor:	≤ 55.4 Ohm/km
Voltage rating:	300 V
Fire Test:	CMP

PACKED WEIGHT

210-224/P/WH:	XXX lb
---------------	--------

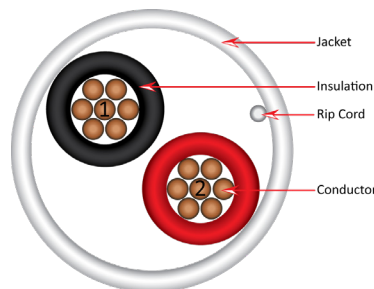

VERTICAL CABLE
951.696.7772 California
800.749.2447 Florida
845.391.8318 New York
713.322.7242 Texas



verticalcable.com

Rev. 05/2025

Subject to change without notice.