

ALARM-SECURITY CABLE

14 AWG 2 CONDUCTOR

STRANDED (PLENUM-RATED)



DESCRIPTION

14 AWG 2 Conductor Stranded Bare Copper, CL3P, Unshielded with an overall jacket. 500 ft, Pull Box, White

FEATURES

- 14 AWG, 2-Conductor Stranded Bare Copper
- Plenum-Rated (CL3P / CMP) Unshielded Construction
- Rip Cord Included
- Color-Coded Conductors (Red, Black)
- 500 ft Pull Box
- ETL Listed, RoHS Compliant, FT6 Rated



211-142/P/5WH

CONSTRUCTION

Conductor count:	2
Shape:	Round
Rip cord:	Yes

CONDUCTORS

Material:	Stranded bare copper
Trade size:	14 AWG
Stranding:	19 Strand
Strand Diameter:	0.02 in (0.47 mm)
Insulation material:	Polyvinyl Chloride (PVC)
Insulation O.D.:	0.04 in. (1.10 mm)
Insulation color:	Red, Black

JACKET

Material:	Polyvinyl Chloride (PVC)
Thickness:	0.02 in. (0.46 mm)
O.D.:	0.20 in. (5.10 mm)
Marking:	14AWG 2C STRANDED c(ETL)us CMP 5024318 RoHS/FT6/CL3P 080109N0715103 03:52 XXXFT

MECHANICAL


Temperature rating:	75° C
---------------------	-------

SAFETY

NFPA 70 (NEC®) rating:	CMP/CL3P
Voltage rating:	300 V RMS

PACKED WEIGHT

211-142/P/5WH:	19.7 lb. (8.9)
----------------	----------------

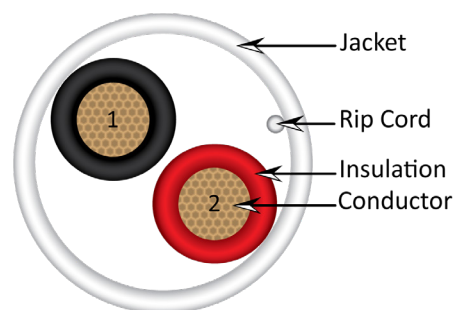

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York
713.322.7242 Texas



verticalcable.com

Rev. 05/2025

Subject to change without notice.