


Splicing

Mechanical Splice Holders

265-HLD13-2B4-0 Optical Fiber Mechanical Splice Holder, No Sleeves, 12-Fiber Capacity

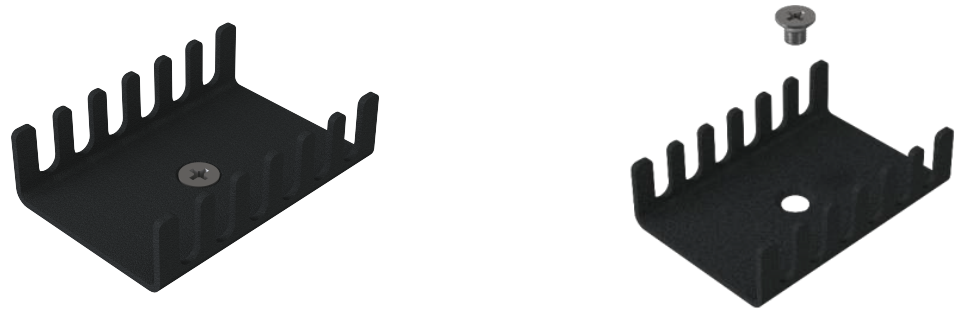

CHARACTERISTICS

Compatible splice:	VC fiber 265-MEC01 mechanical splice.
Material:	aluminum alloy 5052-H32 or equivalent.
Finish, color:	black powder coating.
Mounting type:	M3 CSK machine screw (included); four two-sided adhesive pads.
Capacity:	6 slots×2 splices/slot = 12 splices.
Dimensions:	26 mm×40 mm×11 mm (1.0 in×1.6 in×0.4 in).
Weight:	3.9 g (0.14 oz) without splices.
Storage temperature:	-45 °C—+85 °C (-49 °F—+185 °F).
Operating temperature:	-40 °C—+70 °C (-40 °F—+158 °F).
Operating humidity:	≤95 % RH non-condensing.



DESIGNED
ENGINEERED
ASSEMBLED
IN THE USA

