



CAT5E JUNCTION BOX SPLICE BOX (SHIELDED)

040-373/C5J/S

Height	Width	Length
0.94 in.	1.37 in.	2.47 in.

SPECIFICATIONS

MATERIAL

Housing:	ABS, UL 94V-0
Metal Cover:	SPCC, 0.5 mm thickness with Chromium plating

IDC

Housing:	PC + Glass Fiber, UL 94V-2
Terminal:	Phospor Bronze with Tin plating

PCB

FR4, UL 94V-0

ENVIRONMENTAL

Operating Temperature: -10°C - 60°C

PERFORMANCE






Meets or exceeds ISO/IEC 11801, ANSI/TIA-568.2-D

DESCRIPTION

CAT5E Junction Box Shielded, T568A & T568B Standards, Splice Box, Compatible with 110 & Krone Termination Tools.

FEATURES

- High-impact ABS construction
- Screws, ties and adhesive tape included
- 110 & Krone type terminal blocks
- Can be terminated with 110 or Krone type tools
- UL 94V-0 Fire Retardant
- Fully Shielded Box
- T568A & T568B Color Codes
- UL Listed

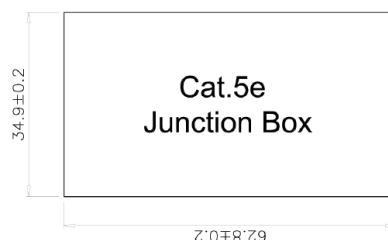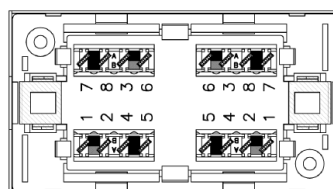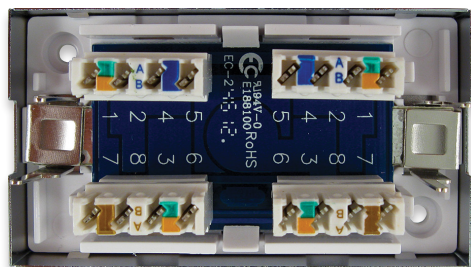

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York
713.322.7242 Texas



verticalcable.com

Rev. 06/2025

Subject to change without notice.