


266-PKM04-24000

Blank Rack-Mount-Panel, Front Pull-out keystone module blocks, labeling, 1-RMU, 24-position

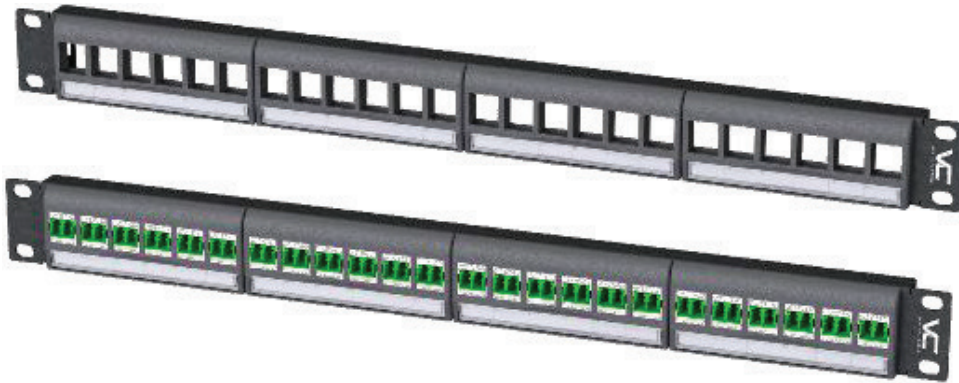

266-CFM00-2A2A

Cable Management Bar, General Purpose, 2-in Deep, Extended Width.

264-KMB01-WH#

Optical Fiber Adapter Keystone Module Bezel, White

264-KMB01-BK


Optical Fiber Adapter Keystone Module Bezel, Black

264-KMB01-3Y-WH

Optical Fiber Adapter Keystone Module SC SM APC, White bezel



263-OFA Series

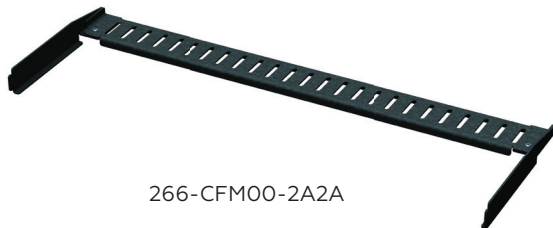

266-CFM00-2A2A



264-KMB01-WH#



264-KMB01-BK



264-KMB01-3Y-WH

Compatible with all Vertical Cable keystone inserts
(optical fiber & twisted-pair systems)



F-81 Keystone Insertse
(multiple colors)
037 Series



Keystone Inserts
Blank (multiple colors)
037 Series



Shuttered
Keystone Modules
264-KMB03 Series



HDMI Keystone Coupler F/F
245-KJC/FF/180



Keystone Jacks
Unshielded
351, 352, 353 Series




Keystone Jacks
Shielded
301, 302, 303 Series



Keystone Couplers
Unshielded
301-KCJ, 302-KCJ Series



Keystone Couplers
Shielded
303-KCJ/S

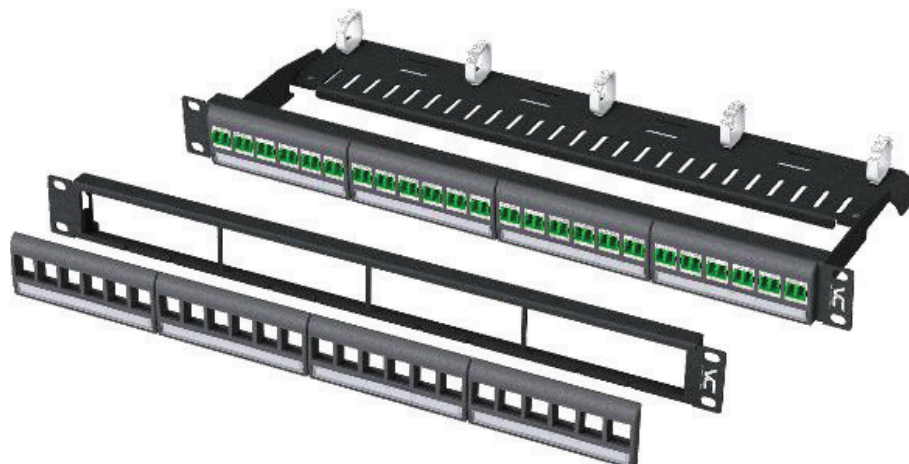



Keystone Module Panels - Medium Density - Block Design

CHARACTERISTICS


Form-factor:	19-in rack/cabinet mounting standard (EIA-ECA-310-E).
Capacity:	twenty-four keystone modules; up to 24 optical fibers (FC, ST, SC SX adapters); up to 48 optical fibers (LC DX adapters).
Materials:	panel: 1.5-mm (16-GA) CRS; black powder coating, RAL 9005 (jet black). blocks: high-impact-resistant polycarbonate (PC) resin, UL 94 V-0.
Keystone-module blocks:	front-retractable, patented toolless mechanism.
Labeling:	holder: integral to keystone-module block, clear window; medium: plain-paper inserts, factory-preprinted position numbers.
Connectors:	see Optical Fiber Keystone Modules Data Sheet (264-KMB Series)
Adapter orientation:	key/latch up.
Cable management:	rear, removable, interchangeable (sold separately).
Rack mounting:	set of USCU fasteners: 4 × #10-32 × 5/8 cross-recessed pan-head machine screws, black; 4 × #12-24 × 5/8 cross-recessed pan-head machine screws, black; 4 × #12 × 9/16 × 3/8 plain round washers, nylon, black.
Environmental:	operating temperature: -20 °C – +70 °C (-4 °F – +158 °F); operating humidity: ≤95 % RH non-condensing.
Dimensions:	W: 485 mm (19 in); H: 44.5 mm (1.75 in) [1 RMU]; D: 21 mm (0.83 in).
Weight:	0.3 kg (0.63 lb) without keystone modules.

INSTALLATION INSTRUCTIONS

KEYSTONE MODULE MOUNTING

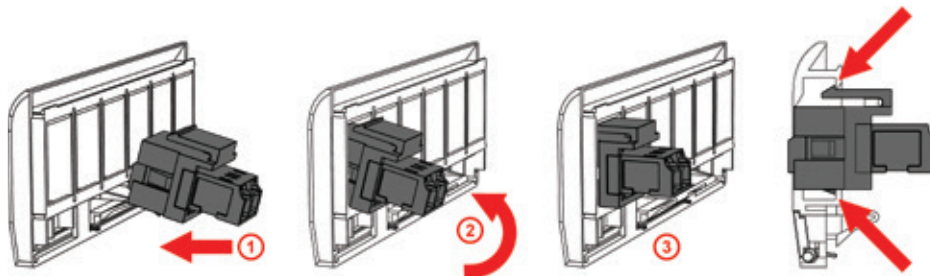


KEYSTONE MODULE BLOCK MOUNTING



KEYSTONE MODULE BLOCK REMOVAL

CABLE MANAGEMENT BAR MOUNTING

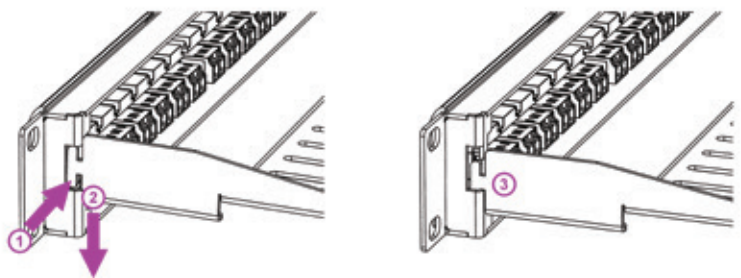

* For a permanent CMB fixation bend slightly the upper part of the CMB anchor inward using a pointing tool, e.g., a screwdriver.