

CAT6A KEYSTONE JACK

90° STYLE (SHIELDED)




DESCRIPTION

CAT6A Shielded Data Grade Keystone Jack
90° 8x8 Conductors.

FEATURES

- 360° Shielding Structure to prevent EMI
- 110-IDC Contacts (Terminal Block)
- Color Coded for 568A and 568B
- EIA/TIA 568A/B standards
- ANSI/TIA-568-C.2, ISO/IEC11801, EN50173-1
- Thermoplastic ABS Housing
- RoHS Compliant

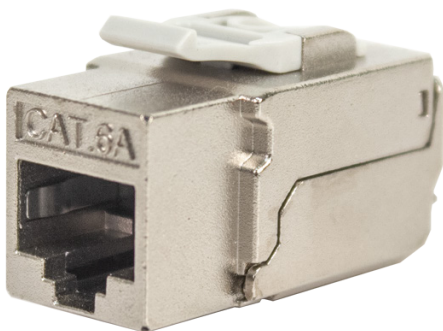

303-J2637/C6AS

Physical Specifications

Dimension (mm) 19.35H x 21W x 46.83D

Housing Material

Housing & Cap Polycarbonate

Contact Material


IDC 110 Contacts	100μ Inch nickel plated over phosphor bronze
IDC Operating Life	Minimum 250 re-terminations
Jack Contact	Phosphor bronze, 50μ inch gold plating over nickel
Jack Operating Life	Minimum 750 insertions
Compatibility	23 to 26 AWG (solid)
Shielded Cover	50~60μ inch nickel plated over phosphor bronze

Product Qualifications

ANSI/TIA-568-C.2
ETL Listed

Electrical:

Dielectric strength	1000V RMS for 1min
Insulation resistance	10mΩ min
Contact Resistance	2mΩ per contact
Temperature Range	-10°C to 60°C max
Humidity	10%~65%

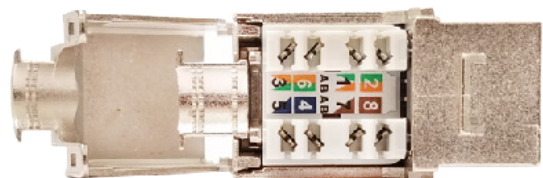

VERTICAL CABLE








951.696.7772 California
800.749.2447 Florida
845.391.8318 New York
713.322.7242 Texas



verticalcable.com

Rev. 06/2025

Subject to change without notice.

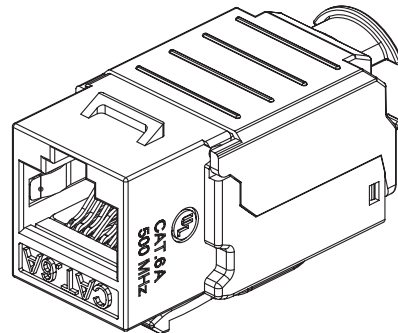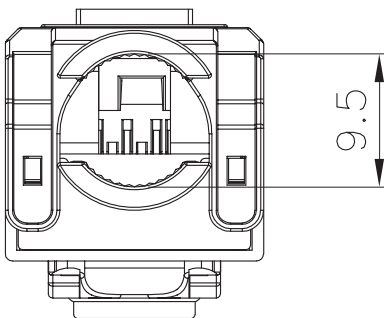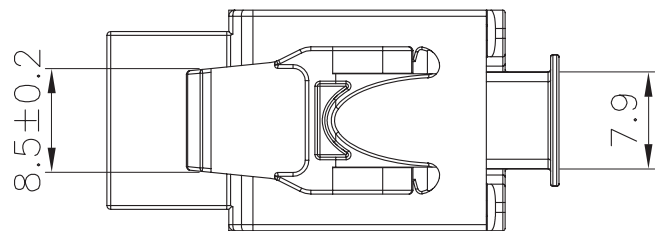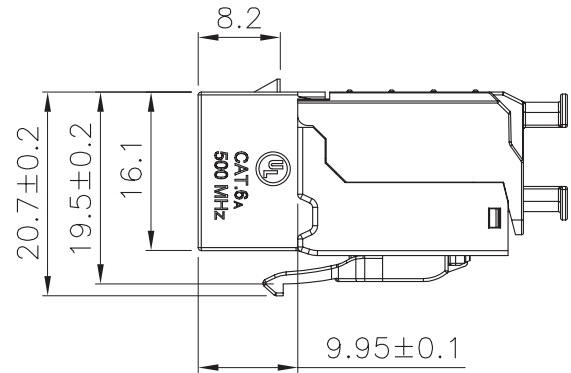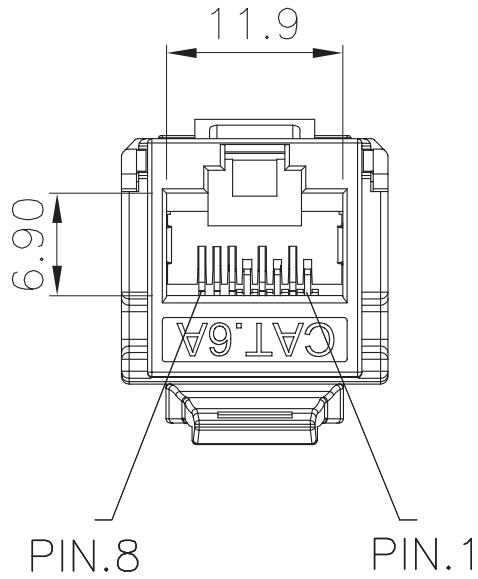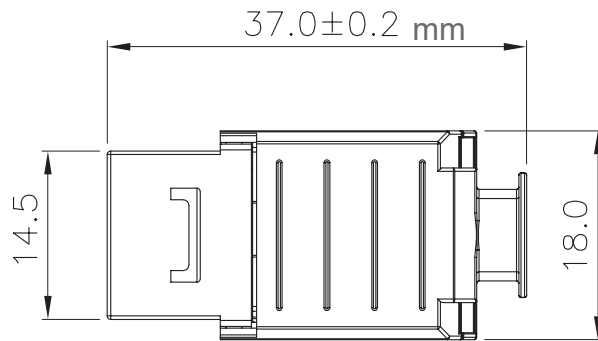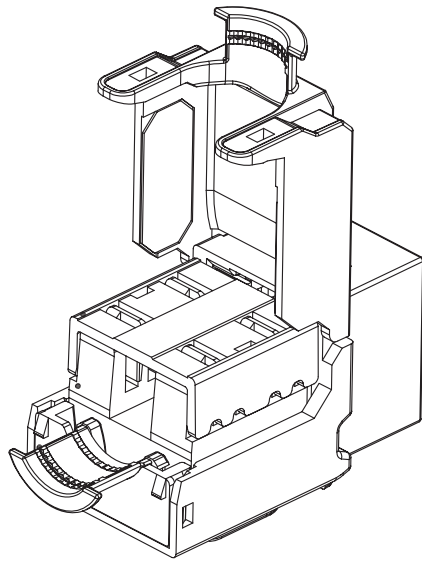

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York
713.322.7242 Texas



verticalcable.com

Rev. 06/2025

Subject to change without notice.