

Category 6A Plug Terminal Modules


- 250-ITM68-A2A2 Terminal Module, Regular 8P8C Plug, CAT6A, STP, Stranded, IP68
 250-ITM68-B1A2 Terminal Module, Field-Terminatable Ruggedized Plug, CAT6A, STP, Solid, IP68

Category 6A Outlet Terminal Module

- 250-ITM68-D1A2 Terminal Module, Socket-to-IDC, CAT6A, STP, IP68

CHARACTERISTICS

- Transmission performance: category 6A per ANSI/TIA-568.2-D;
 category 6A per ISO/IEC 11801.
- Wiring schemes: T568A/T568B.
- Conductor gauge: 250-ITM68-A2A2: stranded, 22-24 AWG.
 250-ITM68-B1A2: solid: 22-24 AWG.
 250-ITM68-D1A2: solid: 22-24 AWG.
- Locking Mechanism: bayonet.
- Environmental protection: IP68.
- Housing: IEC 61076-3-106 variant 01 style 2;
 IEC 60529.

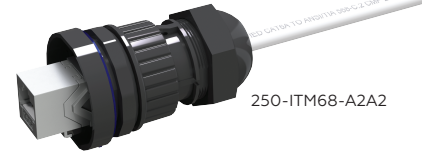

250-ITM68-A2A2



250-ITM68-B1A2



250-ITM68-D1A2

OF Plug Terminal Modules

- 250-ITM68-C031 Terminal Module, OF Plug Holder, SC SX, Blank, IP68
 250-ITM68-C042 Terminal Module, OF Plug Holder, LC DX, Blank, IP68

CHARACTERISTICS

- Plug compatibility: SC SX;
 LC DX.
- Boot length: 30 mm (1.2 in) max.
- Compression fittings: SC SX: one (simplex) round cable opening, 2 mm–3 mm (0.08 in–0.12 in) O.D.;
 LC DX: two (duplex) round cable openings, 2 mm–3 mm (0.08 in–0.12 in) O.D.
- Environmental protection: IP68.
- Housing: IEC 61076-3-106 variant 01 style 2.

250-ITM68-C031



250-ITM68-C042



ACCESSORIES

- 250-ITM68-0A-10 Compression Fitting for 250-ITM68-B Modules, 8.5-mm (0.35-in) cable O.D., Pack of 10
 250-ITM68-0B-10 Compression Fitting for 250-ITM68-A Modules, 6-mm (0.24-in) cable O.D., Pack of 10
 250-ITM68-0C-10 Compression Fitting for 250-ITM68-C Modules, Pack of 10
 250-ITM68-0D-10 Sealing Gasket for 250-IOM68-D Modules, Rubber, Pack of 10
 250-ITM68-0E-10 Protective End Cap for Plug Terminal Modules, IP68, Pack of 10



0A



0B



0C



0D



0E