
CROSS-CONNECT > Rack-Mount Identification and Labelling ZERO-U Administration Panels 266-LBL00-A0A4 Administration Panel, Zero-U, Rack-Mount, Quarter Label Holders (set of 4 included) Image: Constraint of the image of t

MOUNTING DETAILS





CROSS-CONNECT > Rack-Mount Identification and Labelling

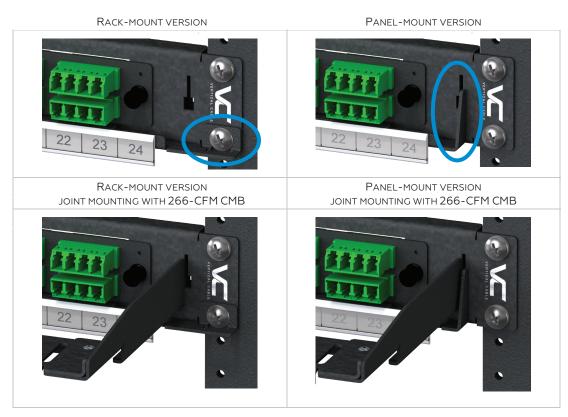

CHARACTERISTICS

Compatibility:	266-LBL00-A0 (Rack-Mount)	266-LBL00-A1 (Panel-Mount)
	Any equipment with rack mounting format meeting EIA-ECA-310-E 19-in standard specifications	VC fiber products equipped with T-anchor openings
Compliance:	ANSI/TIA-606, ISO/IEC TR 14763-2-1.	
Materials:	panels: 1.5-mm (16-GA) CRS, black powder coating (RAL 9005, jet black); label holders: PVC, double-sided adhesive tape, plain paper label.	
Rack mounting:	above or below equipment unit being administered; screws used to mount equipment unit being administered, size range: M5–M6, #10–#	
Panel mounting:	integral spring-loaded snap-in T-anchors; labeling area located below unit being administered.	
Label type:	insert type, plain paper/cardstock strips.	
Environmental:	operating temperature: -20 °C−+70 °C (-4 °F−+158 °F); operating humidity: ≤95 % RH non-condensing.	
Dimensions, panels:	266-LBL00-A0	266-LBL00-A1
Width, overall:	483 mm (19.0 in)	438 mm (17.2 in)
Width, labeling area:	419 mm (16.5 in)	
Height, overall:	19 mm (0.8 in)	34 mm (1.3 in)
Height, labeling area	14 mm (0.6 in)	
Depth, overall:	13 mm (0.5 in)	18 mm (0.7 in)
Depth, panel:	10 mm (0.4 in)	15 mm (0.6 in)
Protrusion, overall:	13 mm (0.5 in)	
Weight:	120 g (4.2 oz)	
Dimensions, label holders:	Third label holders	Quarter label holders
Width, holder:	138 mm (5.4 in)	102 mm (4.0 in)
Height, holder:	14.2 mm (0.56 in)	
Width, label:	138 mm (5.4 in)	102 mm (4.0 in)
Height, label:	11 mm (0.43 in)	
Depth:	2.9 mm (0.11 in)	

APPLICATION EXAMPLES



P. 2/2