



# DIRECT BURIAL AUDIO CABLE

## 12 AWG 2 CONDUCTOR

### CMX (UV) RATED

**209-2324/DB**

#### CONSTRUCTION

Conductor count:	2
Shape:	Round
Rip cord:	Yes
Water Block Type:	Yes

#### CONDUCTORS

Material:	Stranded bare copper
Trade size:	12 AWG
Stranding:	65/0.25 mm
Insulation material:	Polyvinyl Chloride (PVC)
Insulation O.D.:	0.13 in. (3.30 mm)
Insulation color:	Red, Black

#### JACKET

Material:	Polyethylene (PE)
Thickness:	0.02 in. (0.55 mm)
O.D.:	0.36 in. (9.20 mm)
Marking:	VERTICAL 5024318 c(ETL)us AUDIO CABLE 12AWG 2 COND 105 STRANDED OXYGEN FREE OUTDOOR UV DIRECT BURIAL RoHS XXXFT 076213N0701207 19:35

#### MECHANICAL

Temperature rating:	75° C
Aging Condition (°Cxhrs):	100x168
Tensile Strength (Mpa)	
Before:	≥13.8
After:	≥85% of unaged
Aging Elongation (%):	
Before:	≥100
After:	≥50% of unaged
Cold Bend (-20±2° Cx4hrs):	No Crack

#### SAFETY

NFPA 70 (NEC®) rating:	CMX (UV)
Voltage rating:	300 V RMS

#### PACKED WEIGHT


209-2324/DB:	35 lb
--------------	-------

## DESCRIPTION

**12 AWG 2 Conductor Direct Burial, CMX (UV) Stranded Bare Copper, Unshielded with an overall jacket. 500 ft, Spool, Black.**

## FEATURES

- Suitable for Direct Burial
- Durable Weather Resistant Jacket
- High-Strand Oxygen Free
- Bare Copper Conductors
- ETL Listed, RoHS-compliant
- 500 ft Spool
- UV Rated Outer Jacket

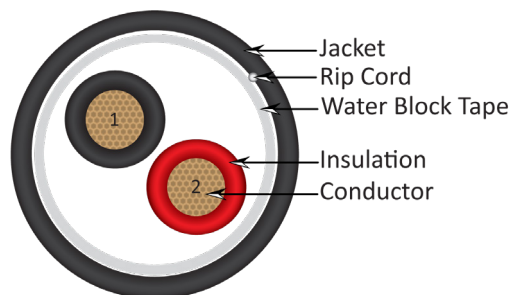

**VERTICAL CABLE**

951.696.7772 California  
800.749.2447 Florida  
845.391.8318 New York  
713.322.7242 Texas



[verticalcable.com](http://verticalcable.com)

Rev. 08/2025

Subject to change without notice.