



DESCRIPTION

22 AWG 4 Conductor Stranded Bare Copper, CL3P (Plenum Rated) Unshielded with an overall jacket. 1000 ft, Pull Box, White

APPLICATION

- Intercom Systems
- Security Systems
- Sound and Audio
- Power Limited Control Circuits
- Indoor Applications
- Door Controllers
- Key Pads
- Smoke Detectors



ALARM-SECURITY CABLE

22 AWG 4 CONDUCTOR

PLENUM RATED, STRANDED

210-224/P/WH

CONSTRUCTION

Conductor count:	4
Stranding:	7 Strand 0.01 in. (0.25 mm)
Shape:	Round
Rip cord:	Yes

CONDUCTORS

Material:	Stranded bare copper
Trade size:	22 AWG
Conductor O.D.:	0.02 in. (0.61 mm)
Insulation material:	Polyvinyl Chloride (PVC)
Insulation O.D.:	0.04 in. (0.96 mm)
Insulation color:	Black, Red, White, Green

JACKET

Material:	Polyvinyl Chloride (PVC)
Thickness:	0.02 in. (0.52 mm)
O.D.:	0.14 in. (3.75 mm)
Marking:	22AWG 4C STRANDED c(ETL)us CMP 5024318 RoHS/FT6/CL3P 076109N0708103 07:12 XXXXFT

MECHANICAL


Temperature rating:	75° C
---------------------	-------

SAFETY

DCR Conductor:	55.4 Ohm/Km. @ 20° C
NFPA 70 (NEC®) rating:	CMP/CL3P
Voltage rating:	300 V RMS

PACKED WEIGHT

210-224/P/WH:	16.5 lb
---------------	---------

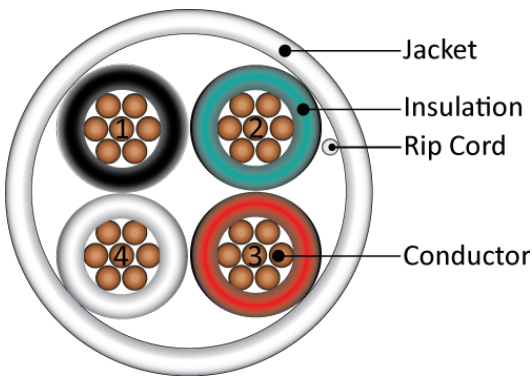

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York
713.322.7242 Texas



www.verticalcable.com

Rev. 08/2025

Subject to change without notice.