**VC**

# VERTICAL CABLE
*Simply* **Connect.**

## DESCRIPTION

**22 AWG 2 Conductor Solid Bare Copper, Unshielded with an overall jacket, Coil Pack, 500 ft, Grey**

## FEATURES

- **22 AWG Conductor type solid bare copper**
- **2 conductors (Red, Black color-coded)**
- **Round Cable Shape**
- **Includes ripcord for easy jacket stripping**
- **Coil pack packaging**
- **Color: Grey**
- **Key Pads**
- **ETL listed, CM/CL2 rated, RoHS compliant**



## 212-222SO/5GY

### CONSTRUCTION

| | |
|---|---|
| Conductor count: | 2 |
| Shape: | Round |
| Rip cord: | Yes |

### CONDUCTORS

| | |
|---|---|
| Material: | Bare solid copper |
| Trade size: | 22 AWG |
| Conductor O.D.: | 0.02 in. (0.61 mm) |
| Insulation material: | Polyvinyl Chloride (PVC) |
| Insulation O.D.: | 0.04 in. (0.96 mm) |
| Insulation color: | Red, Black |

### JACKET

| | |
|---|---|
| Material: | Polyvinyl Chloride (PVC) |
| Thickness: | 0.02 in. (0.45 mm) |
| O.D.: | 0.1 in. (2.80 mm) |

Marking: VERTICAL 4001453 cETLUS CM/CL2
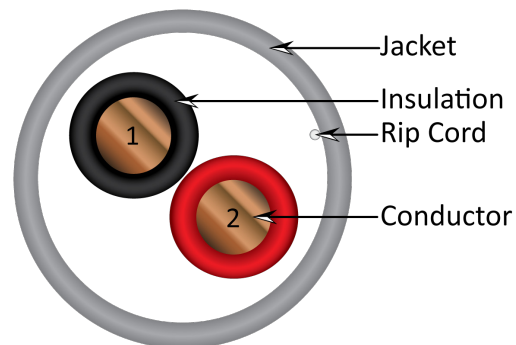22AWG 2C SOLID 75C RoHS
V1379P10150 XXXFT

### MECHANICAL

| | |
|---|---|
| Temperature rating: | 75º C |

### SAFETY

| | |
|---|---|
| NFPA 70 (NEC®) rating: | CM/CL2 |
| Voltage rating: | 300 V RMS |

### PACKED WEIGHT

| | |
|---|---|
| 212-222SO/5GY: | 3.7 lb |



Jacket
Insulation
Rip Cord
Conductor

**RoHS** **ETL** Intertek

## VERTICAL CABLE

**951.696.7772 California**
**800.749.2447 Florida**
**845.391.8318 New York**
**713.322.7242 Texas**

**verticalcable.com**

**Rev. 08/2025**
Subject to change without notice.