




DESCRIPTION

Control Panel Cable, CMR/CL3R Rated,
2 x 22-AWG Shielded / 2 x 18-AWG Stranded Bare
Copper Conductors, Overall Clear Tape.

FEATURES

- For Touch Panels / Key Pads
- Expansion Modules / Tuners
- Power Limited Control Circuits
- 2 x 22-AWG + 2 x 18-AWG Stranded Bare Copper Conductors
- Exceeds ANSI/TIA-568.2-D and ISO/IEC 11801 specifications
- CAN/CSA-C22.2 No. 214, RoHS compliant
- CM/CL3 Rated
- ETL listed

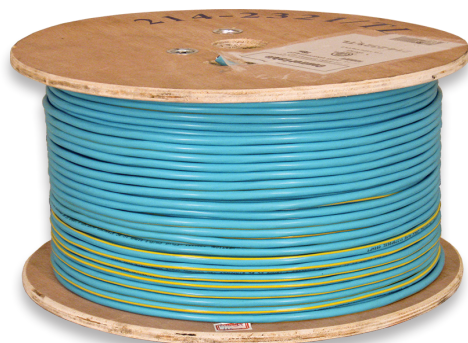

CONTROL PANEL CABLE

22 AWG 2 CONDUCTOR (SHIELDED)

18 AWG 2 CONDUCTOR

214-2321/TL

TRANSMISSION PERFORMANCE

Meets or exceeds ANSI/TIA-568.2-D and ISO/IEC 11801 specifications

CONSTRUCTION

Conductors: 4
Color Coding: 22 AWG: White / Blue
18 AWG: Red / Black
Drain Wire (Tinned Copper): 0.016 in. (0.40 mm)
Screen: 22 AWG: Foiled
18 AWG: Unscreened

CONDUCTORS

Material: Stranded bare Copper
Size: 22 AWG / 18 AWG
Stranding: 22 AWG: 7 Strand
18 AWG: 16 Strand

INSULATION

Material: 22 AWG: Foamed Polyethylene (PE)
18 AWG: High Density Polyethylene (HDPE)
Average thickness: 22 AWG: 0.0251 in. (0.64 mm)
18 AWG: 0.0098 in. (0.25 mm)

JACKET

Material: Polyvinyl Chloride (PVC)
Outer diameter: 0.25 in. (6.35 mm)
Average thickness: 0.0318 in. (0.81 mm)
Marking: VERTICAL 4001453 cETLus CMR/CL3R 22AWG 2C BC
STRANDED SHIELDED + 18AWG 2C BC STRANDED 75C
CONTROL CABLE RoHS XXXXFT

ELECTRICAL


Voltage rating: 300 V_{RMS}

ENVIRONMENTAL

Operating temperature: -4 °F–167 °F (-20 °C–75 °C)

WEIGHT

38.4 lb (17.4 kg)

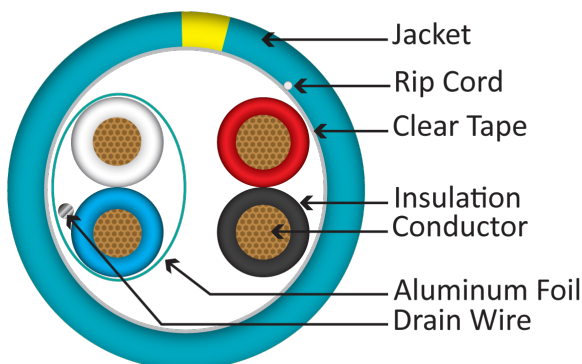

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York
713.322.7242 Texas



verticalcable.com

Rev. 4/2024

Subject to change without notice.