

### **DESCRIPTION**

Raceway Splice Covers, One Piece Available in widths of 0.75, 1.25, and 1.75 in. Available in Office White or Ivory

### **FEATURES**

- · Measuring 2 in. in length
- Tamper resistant, the cover's self-locking, hidden positive latch permits quick re-entry as well as providing a secure installation of premise wire.
- Manufactured of UL 94 V-0 rated PVC material
- Fittings incorporate a minimum 1 in. bend radius per ANSI/TIA-568.0 and ANSI/TIA-569
- Rubber-based foam tape adhesive with high ultimate bond strength conforms to any surface.
- Junction boxes can be used with this raceway for electrical or data outlets
- UL-Listed
- 10 per box



# **RACEWAY SPLICE COVER** - 0.75 IN | 1.25 IN | 1.75 IN

## **045-TSR-14 SERIES**

PART NUMBER:	DESCRIPTION:
045-TSR1FW-14	Raceway Splice Cover, 0.75 in., Office White
045-TSR1I-14	Raceway Splice Cover, 0.75 in., Ivory
045-TSR2FW-14	Raceway Splice Cover, 1.25 in., Office White
045-TSR2I-14	Raceway Splice Cover, 1.25 in., Ivory
045-TSR3FW-14	Raceway Splice Cover, 1.75 in., Office White
045-TSR3I-14	Raceway Splice Cover, 1.75 in., Ivory

#### CONSTRUCTION

Length: 2 in. (50.8 mm)

Width:

045-TSR1x-14: 0.75 in. (19.05 mm) 045-TSR2x-14: 1.25 in. (31.75 mm) 045-TSR3x-14: 1.75 in. (44.45 mm)

Height:

0.45-TSR1x-14: 0.55 in. (13.97 mm) 0.45-TSR2x-14: 0.83 in. (21.08 mm) 0.45-TSR3x-14: 1.08 in. (27.43 mm)

Thickness:

045-TSR1x-14: 0.07 in. (1.78 mm)
045-TSR2x-14: 0.09 in. (2.29 mm)
045-TSR3x-14: 0.10 in. (2.54 mm)

Color: Office White or Ivory
Material: Polyvinylchloride (PVC)











**VERTICAL CABLE** 


951.696.7772 California 800.749.2447 Florida 845.391.8318 New York 713.322.7242 Texas

verticalcable.com

# **RACEWAY SPLICE COVER** - 0.75 IN | 1.25 IN | 1.75 IN

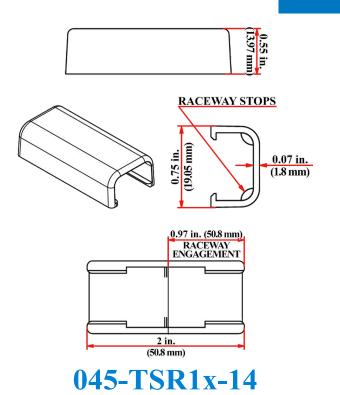

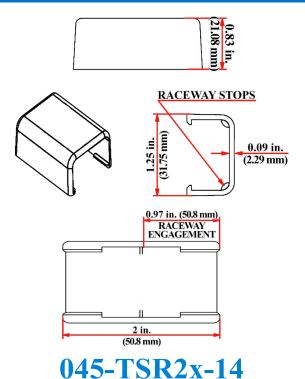

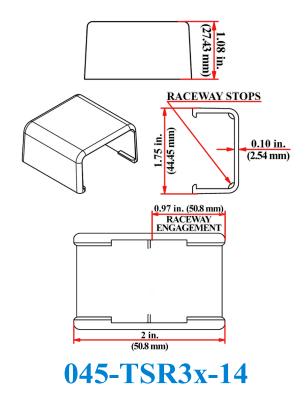





**VERTICAL CABLE** 

951.696.7772 California 800.749.2447 Florida 845.391.8318 New York 713.322.7242 Texas