




DESCRIPTION

Blank Keystone Insert

FEATURES

- Compatible with high-density keystone mounting hardware (wall-plates, panels, etc.)
- Solid-metal bulkhead construction
- Available in five bezel colors
- Contractor bulk packing
- For use with empty ports, protection from unwanted contaminants and preventing tampering
- ANSI/SCTE 02, IEC 60169-24, UL 94V-0 Compliant

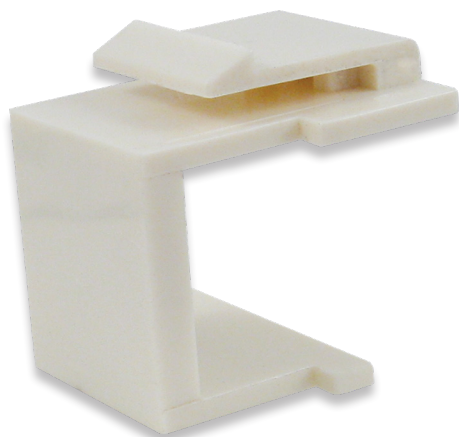

BLANK KEYSTONE INSERT

037-B SERIES

PART NUMBER:	DESCRIPTION:
037-317AL	Blank Keystone Insert, Almond
037-318IV	Blank Keystone Insert, Ivory
037-319WH	Blank Keystone Insert, White
037-320BK	Blank Keystone Insert, Black
037-321GY	Blank Keystone Insert, Gray

CONSTRUCTION

Footprint/Format:

Bezel: standard high-density keystone;

Housing (Bezel):

High-impact thermoplastic, UL94V-0 fire-retardant

MECHANICAL

Mounting Dimensions:

See diagrams

ENVIRONMENTAL

Storage:

-40 °C--70 °C (-40 °F--158 °F)

Operation:




-10 °C--60 °C (+14 °F--140 °F)

RH, Operation:

Max. 93 %, non-condensing

COMPLIANCE

ANSI/SCTE 02, IEC 60169-24, UL 94V-0

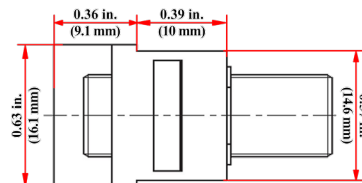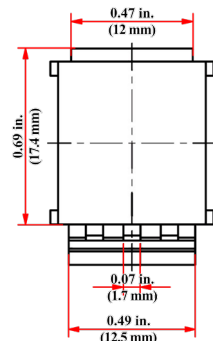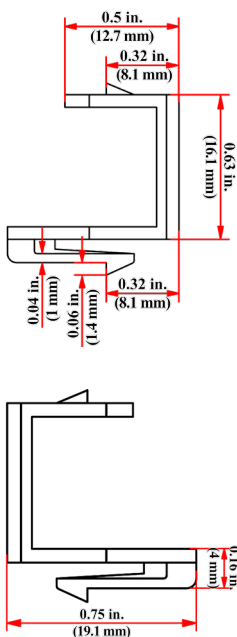

VERTICAL CABLE

951.696.7772 California

800.749.2447 Florida

845.391.8318 New York

713.322.7242 Texas

verticalcable.com

Rev. 11/2025

Subject to change without notice.