

OPTICAL FIBER KEYSTONE MODULES (SHUTTERED)




DESCRIPTION

Optical Fiber Keystone Module - Shuttered
Simplex and Duplex modes
Available in Aqua, Blue, & Green

FEATURES

- Simplex and duplex modes
- Zirconia ceramic split sleeves
- Shuttered bezel design (open and close lid)
- Compatible with all Vertical Cable faceplates and surface-mount boxes designed to mount keystone modules
- Bezel material: ABS (acrylonitrile butadiene styrene)
- ANSI/UL 94 V-0 Compliant

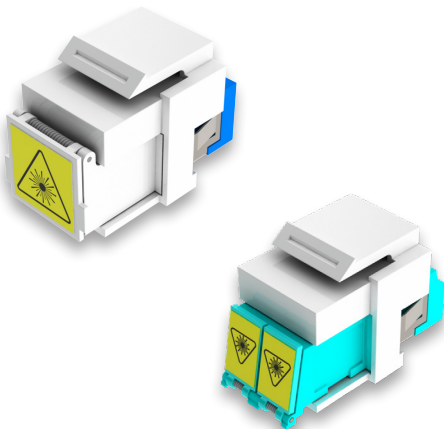

264-KMB03 SERIES

PART NUMBER:	DESCRIPTION:
264-KMB03-3C-WH	Optical Fiber Keystone Module, SC SX Shuttered, Aqua
264-KMB03-3Z-WH	Optical Fiber Keystone Module, SC SX Shuttered, Blue
264-KMB03-3Y-WH	Optical Fiber Keystone Module, SC SX Shuttered, Green
264-KMB03-4C-WH	Optical Fiber Keystone Module, LC DX Shuttered, Aqua
264-KMB03-4Z-WH	Optical Fiber Keystone Module, LC DX Shuttered, Blue
264-KMB03-4Y-WH	Optical Fiber Keystone Module, LC DX Shuttered, Green

CHARACTERISTICS

Compatibility:	All Vertical Cable faceplates and surface-mount boxes designed to mount keystone modules
Fiber Types:	SM 9/125 MM 50/125 mm 62.5/125
Adapters:	Zirconia ceramic split sleeves; One-piece body
Adapter Orientation:	Key/Latch Up
Insertion Loss (IL):	0.3 dB or lower*
Return Loss (RL):	UPC: ≥55 dB* APC: ≥65 dB*
	*(when used with standard-compliant plugs)
Bezel Material:	Acrylonitrile Butadiene Styrene (ABS)

BEZEL COMPLIANCES

Regulation (EC) No 1907/2006 (REACH)
Directive 2011/65/EU Am. 2015/863/EU (RoHS2)

ADAPTER COMPLIANCES

IEC 61754-4 (type SC connector family)
IEC 61754-20 (type LC connector family)
Regulation (EC) No 1907/2006 (REACH)
Directive 2011/65/EU Am. 2015/863/EU (RoHS2)
ANSI/UL 94 V-0

ENVIRONMENTAL

Operating Temperature:	-20 °C–+70 °C (-4 °F–+158 °F)
Operating Humidity:	≤95 % RH non-condensing

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York
713.322.7242 Texas


verticalcable.com

Rev. 11/2025


Subject to change without notice.

OPTICAL FIBER KEYSTONE MODULES (SHUTTERED)

MOUNTING DIMENSIONS

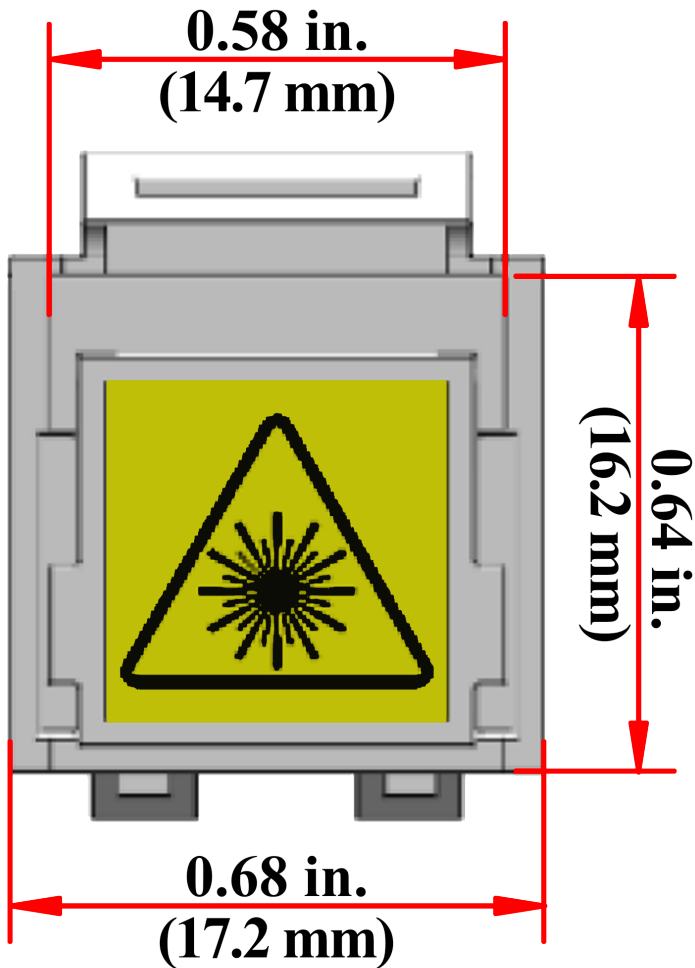

SIMPLEX

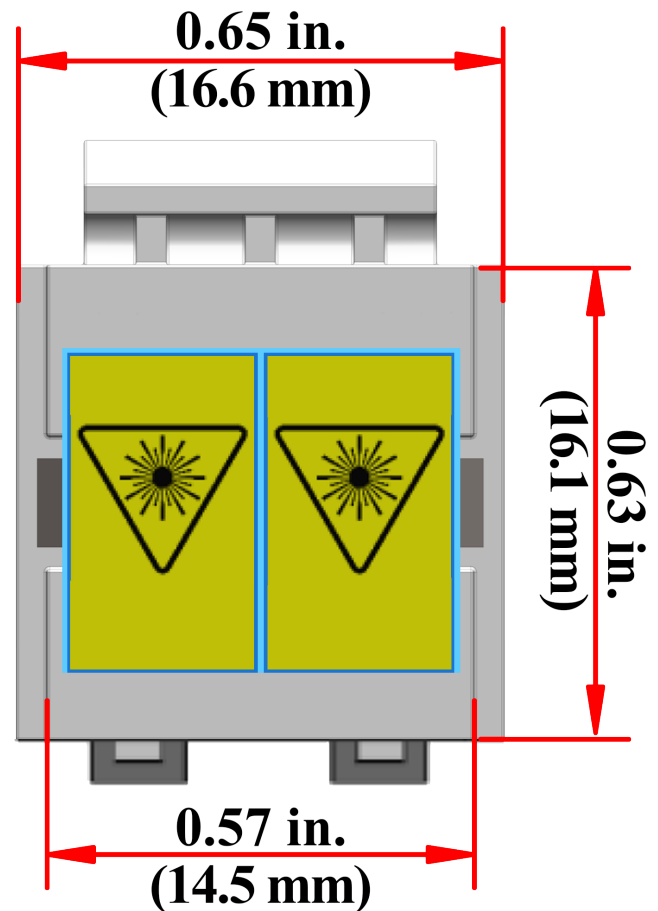

DUPLEX

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York
713.322.7242 Texas

verticalcable.com

Rev. 11/2025

Subject to change without notice.