

OPTICAL FIBER RACK-MOUNT PANEL LGX | 3-POSITION | 1 RMU



DESCRIPTION

Optical Fiber Rack-Mount Panel, LGX,
Three-Position, Front and Rear CMB,
1 RMU

FEATURES

- Standard 19 in. rack/cabinet mount
- 1 RMU
- Holds three LGX adapter plates
- Black powder-coated finish
- Front and rear cable management bars
NOT INCLUDED
- EIA-ECA-310-E compliant



266-PMD01-2A3A

Height	Width	Depth (Panel Frame)	Depth (with CMB)	Color	Weight
1.75 in. (44.45 mm)	19 in. (482.6 mm)	0.6 in. (15.24 mm)	5 in. (127 mm)	Black	0.6 lb (0.27 mm)

CHARACTERISTICS


Form-Factor:	19 in. rack/cabinet mounting standard (EIA-ECA-310-E)
Capacity:	Three LGX Adapter Plates; Up to 72 optical fibers
Materials:	0.06 in. (1.5 mm) (16-GA) CRS; Black powder coating
Cable Management:	266-PMD01-2A3A; Mountable (snap-in), interchangeable, front and/or rear

ENVIRONMENTAL

Operating Temperature:	-20 °C—+70 °C (-4 °F—+158 °F)
Operating Humidity:	≤95 % RH non-condensing

WEIGHT

0.6 lb. (0.25 kg)
without cable management

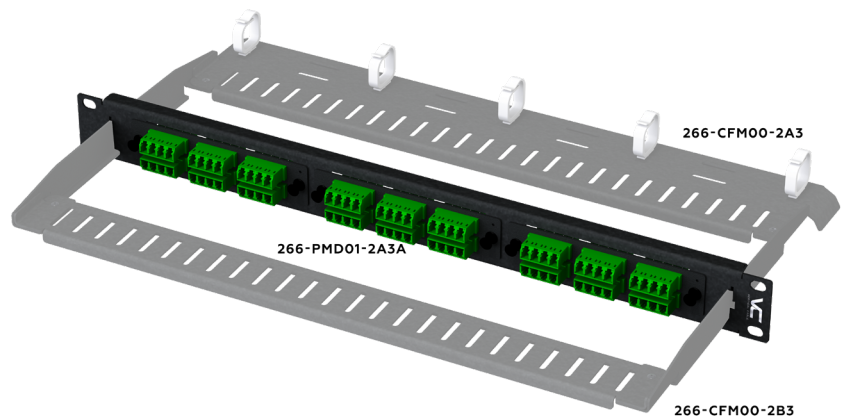

*IN PICTURE SHOWN: CABLE MANAGEMENT BARS ARE AN EXAMPLE AND SOLD SEPARATELY - PART#'S: 266-CFM00-2A3 & 266-CFM00-2B3

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York
713.322.7242 Texas

verticalcable.com

Rev. 11/2025

Subject to change without notice.