



DIRECT BURIAL AUDIO CABLE

12 AWG 4 CONDUCTOR

CMX (UV) RATED

209-2319/DB

CONSTRUCTION

Conductor count:	4
Shape:	Round
Rip cord:	Yes
Water Block Tape:	Yes

CONDUCTORS

Material:	Stranded bare copper
Trade size:	12 AWG
Stranding:	65/0.25 mm
Insulation material:	Polyvinyl Chloride (PVC)
Insulation O.D.:	0.08 in. (2.10 mm)
Insulation color:	Red, Black, White, Green

JACKET

Material:	Polyvinyl Chloride (PVC)
Thickness:	0.02 in. (0.60 mm)
O.D.:	0.41 in. (10.5 mm)
Marking:	VERTICAL 5024318 c(ETL)us AUDIO CABLE 12AWG 4 COND 65 STRANDED OXYGEN FREE OUTDOOR UV DIRECT BURIAL RoHS XXXFT 100807N0819104 07:13

MECHANICAL

Temperature rating:	75° C
Aging Condition (°Cxhrs):	100x168
Tensile Strength (Mpa)	
Before:	≥13.8
After:	≥85% of unaged
Aging Elongation (%):	
Before:	≥100
After:	≥50% of unaged
Cold Bend (-20±2° Cx4hrs):	No Crack

SAFETY

NFPA 70 (NEC®) rating:	CMX (UV)
Voltage rating:	300 V RMS

PACKED WEIGHT


209-2319/DB	62 lb
-------------	-------

DESCRIPTION

12 AWG 4 Conductor Direct Burial, CMX (UV) Stranded Bare Copper, Unshielded with an overall jacket. 500 ft, Spool, Black.

APPLICATION

- Sound and Audio
- Intercom Systems
- Outdoor Applications
- Suitable for Direct Burial
- Durable Weather Resistant Jacket
- UV Rated Outer Jacket

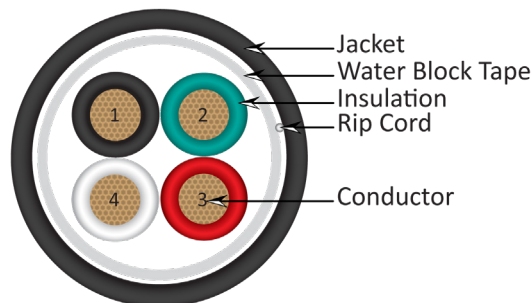

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York
713.322.7242 Texas



verticalcable.com

Rev. 12/2024

Subject to change without notice.