



VERTICAL CABLE

DESCRIPTION

Cable Management Bar, General Purpose,
3 & 4 in. Depth

FEATURES


- 1.5 mm (16-GA) CRS
- Black Powder Coating
- Removable, Interchangeable

APPLICATIONS

- Industrial Networks
- General Purpose
- Multimedia Cabling Distribution Nodes

VC COMPATIBILITY

- 266-PMD01-2A3A
- 266-PKM02-24xxx
- 266-PKM02-D8xxx

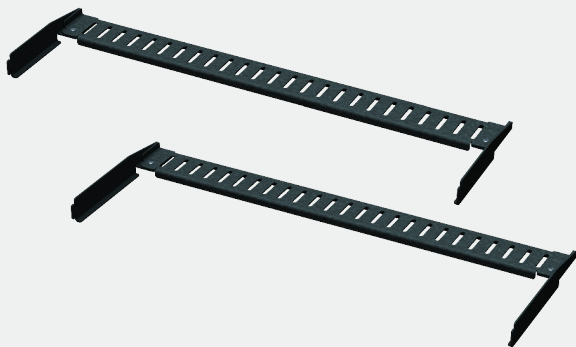

CABLE MANAGEMENT BARS

GENERAL PURPOSE | 3 & 4 IN. | BASIC WIDTH

266-GP SERIES

	266-CFM00-2A3	266-CFM00-2A4
Height	1.0 in. (25 mm)	
Width	16.9 in. (430 mm)	
Depth	3 in. (75 mm)	4 in. (100 mm)
Color	Black	
Weight	9.5 oz. (269.32 g)	11.5 oz. (326.02 g)

CHARACTERISTICS

Materials:

0.06 in. (1.5 mm) (16-GA) CRS;
Black Powder Coating

Cable Management:

1 × cable management bar, folded;
1 × shipping box
Cable ties **NOT INCLUDED**

ENVIRONMENTAL

Operating Temperature:

-20 °C–+70 °C (-4 °F–+158 °F)

Operating Humidity:

≤95 % RH non-condensing


WEIGHT

266-CFM00-2A3:

9.5 oz. (269.32 g)

266-CFM00-2A4:

11.5 oz. (326.02 g)

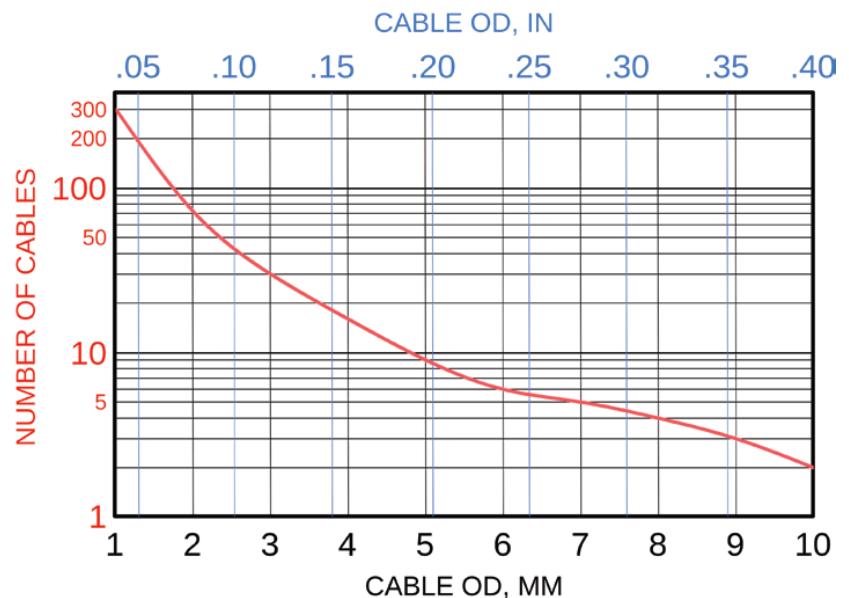

Florida (HQ)
800-749-2447

California
951-696-7772

New York
845-391-8318

Texas
713-322-7242

verticalcable.com

This specification sheet is subject to change without notice.



RoHS



Intertek

Rev. 12/2025