





VERTICAL CABLE

DESCRIPTION

Optical Fiber Splice Holder, Adhesive Mounting, No Sleeves, 12-Fiber Capacity

FEATURES

- Compatible Splices include: Fusion Splice, Heat-Shrink Protection Sleeves
- Splice Holder Capacity
- Adhesive Pad Mounting
- ANSI/UL 94 V-2 Compliant
- Weight: 0.09 oz. (2.5 g)

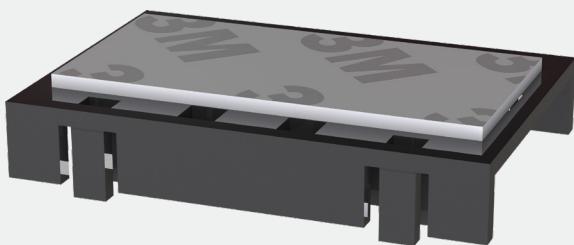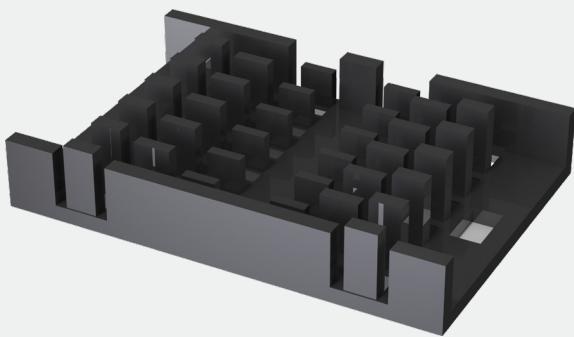

OPTICAL FIBER SPLICE HOLDER

NO SLEEVES | ADHESIVE MOUNTING

265-HLD01-2B-00

CHARACTERISTICS



Capacity:	Up to 12 Splice Protection Sleeves (12 Fibers), stackable in two levels
Material:	Polypropylene (PP)
Color:	Black
Mounting Type:	Adhesive Pad

DIMENSIONS

Height:	1.6 in. (40.64 mm)
Width:	1.2 in. (30.48 mm)
Depth:	0.3 in. (7.62 mm)

ENVIRONMENTAL

Operating Temperature: -20 °C +70 °C (-4 °F +158 °F)
Operating Humidity: ≤95% RH non-condensing

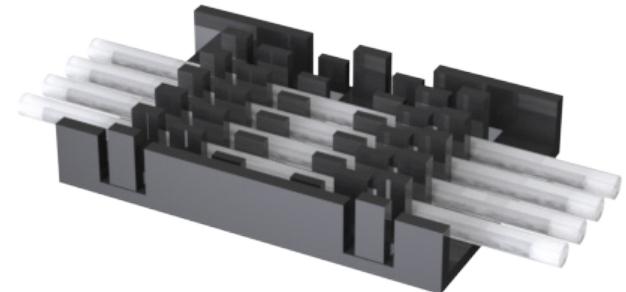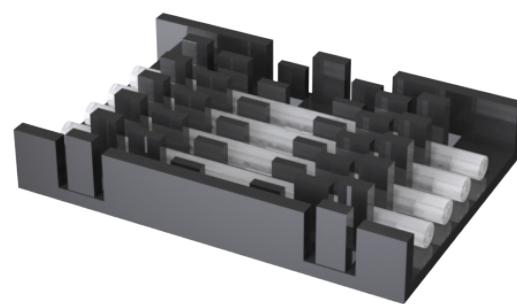

* Optical Fiber Splices NOT INCLUDED

Florida (HQ)
800-749-2447

California
951-696-7772

New York
845-391-8318

Texas
713-322-7242

verticalcable.com

This specification sheet is subject to change without notice.

Rev. 01/2026