



VERTICAL CABLE

DESCRIPTION

**Optical Fiber Rack-Mount Enclosure,
4 RMU Standard-Series, LGX,
Twelve-Position**

FEATURES

- 4 RMU 19 in. Mounting standard (EIA-ECA-310-E)
- Holds twelve (12) LGX adapter plates (up to 288 fibers)
- Front and rear access with retractable stage
- Durable 16-GA aluminum, Black Powder-Coated Finish
- Cable management: Grommeted entry points; perforated cable anchor plates; strength elements anchor points (screw joints); set of cable ties and self-gripping tie wraps
- Fiber management: Spools, rings
- Weight: 21.5 lb. (9.8 kg)



*264-LAP Series NOT INCLUDED

OPTICAL FIBER RACK-MOUNT ENCLOSURE LGX | 4 RMU | STANDARD SERIES

267-RES01-1L4

CHARACTERISTICS

Materials: 0.06 in. (1.5 mm) (16-GA); Black Powder Coating
Mounting: Two depth level
Doors: Front: Clear plastic, hinged, removable
Rear: Metal, hinged, removable
Covers: Front and rear, removable (screw joints)

CAPACITY

Adapter Plates: Twelve LGX Adapter Plates;
Optical Fibers: Up to 288 optical fibers
Splice Trays: Up to twelve 24-fiber splice trays;

ENVIRONMENTAL


Operating Temperature: -20 °C–+70 °C (-4 °F–+158 °F)
Operating Humidity: ≤95 % RH non-condensing

DIMENSIONS

Height:	7 in. (178 mm)
Width (Flange):	19 in. (483 mm)
Width (Frame):	17 in. (433 mm)
Depth:	14 in. (354 mm)

VERTICAL CABLE ACCESSORIES

1. 265-CAS01-1B200 (compact cassettes)
2. 265-CAS01-2B200 (standard cassettes)
3. 265-CAS10-F06A2
4. 264-LAP Series

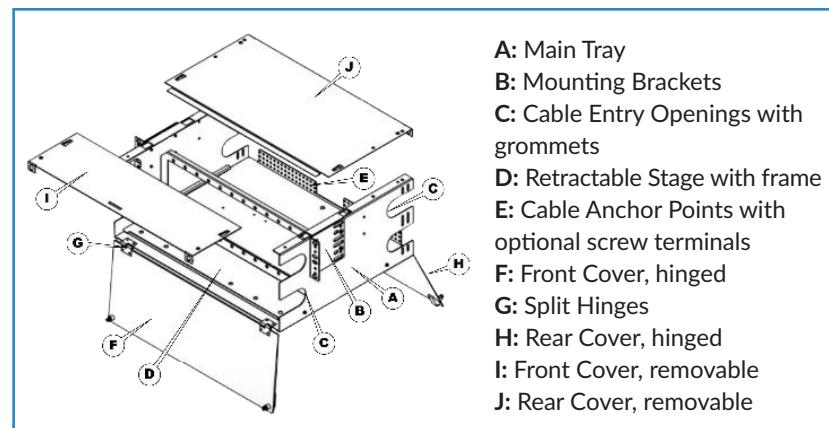

Florida (HQ)
800-749-2447

California
951-696-7772

New York
845-391-8318

Texas
713-322-7242

verticalcable.com

This specification sheet is subject to change without notice.

Rev. 01/2026