



VERTICAL CABLE

BRIDLE RINGS

WOOD SCREW THREAD

1 1/4" - 4"

048-190/WS SERIES

DESCRIPTION

Bridle Rings, 1 1/4 in. | 1 1/2 in. | 2 in. | 4 in.
#16x1" Thread, Galvanized Steel, Zinc Plating.

FEATURES

- Durable steel with rust-resistant zinc plating
- Supports communication cables and other low voltage wires
- Allows direct mounting to wood studs and ceiling joists without extra fasteners or clamps
- Load capacity: 50 lbs
- Steel thickness: 0.0002 in.
- Rod diameter: 0.2 in.
- Thread length: 1 in.
- Thread type: #16 x 1"
- Max burr: 0.005 in.
- Master box quantity: 100 pieces



PART NUMBERS	DESCRIPTION
048-195/WS/14	16-1 x 1 1/4" Bridle Ring
048-196/WS/12	16-1 x 1 1/2" Bridle Ring
048-197/WS/20	16-1 x 2" Bridle Ring
048-198/WS/40	16-1 x 4" Bridle Ring

CONSTRUCTION

(Usable) Diameter:

048-195/WS/14	1.25 in. (31.75 mm)
048-196/WS/12	1.5 in. (38.10 mm)
048-197/WS/20	2 in. (50.80 mm)
048-198/WS/40	4 in. (101.60 mm)

Height:

048-195/WS/14	3.25 in. (82.55 mm)
048-196/WS/12	3.5 in. (88.90 mm)
048-197/WS/20	4 in. (101.60 mm)
048-198/WS/40	6 in. (152.40 mm)

Width:

048-195/WS/14	1.75 in. (44.45 mm)
048-196/WS/12	2 in. (50.80 mm)
048-197/WS/20	2.5 in. (63.50 mm)
048-198/WS/40	4.5 in. (114.30 mm)

Horizontal Offset:

048-195/WS/14	0.43 in. (11 mm)
048-196/WS/12	0.43 in. (11 mm)
048-197/WS/20	0.43 in. (11 mm)
048-198/WS/40	1 in. (25.40 mm)

Weight:

048-195/WS/14	0.06 lb (27.22 g)
048-196/WS/12	0.07 lb (32 g)
048-197/WS/20	0.09 lb (41 g)
048-198/WS/40	0.15 lb (68.04 g)

Thickness:

0.0002 in. (0.005 mm)



1 1/4 in.

1 1/2 in.

2 in.

4 in.

Florida (HQ)
800-749-2447

California
951-696-7772

New York
845-391-8318


Texas
713-322-7242

verticalcable.com


This specification sheet is subject to change without notice.

Rev. 02/2026


048-195/WS/14

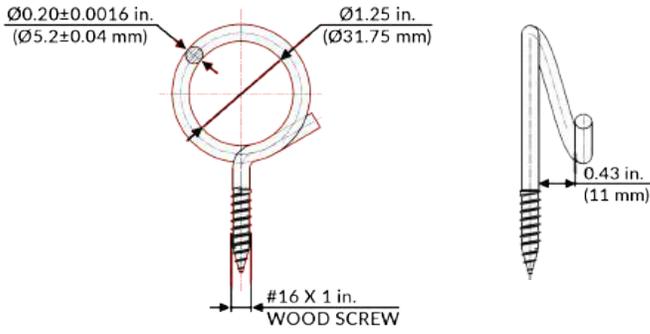


048-196/WS/12

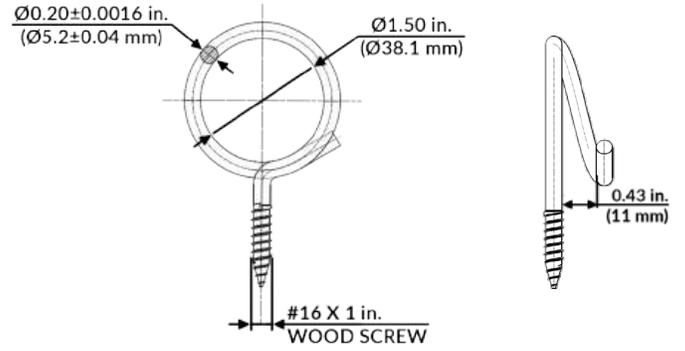

048-197/WS/20

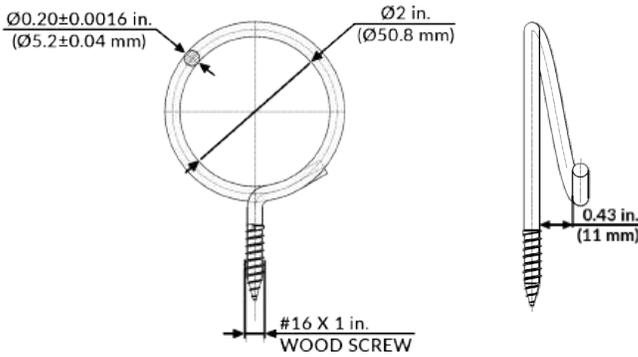

048-198/WS/40

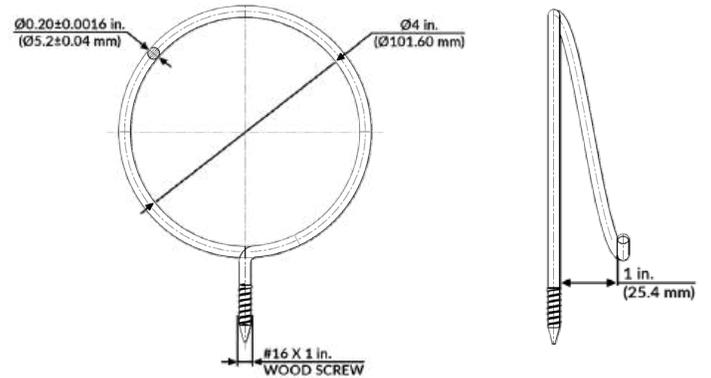

ACCESSORY

048-211/BRS/20 Snap-on Bridle Ring Saddle, 2 in.

Key Features:

- Sturdy support for multiple cables
- Easy snap-on design
- Material: Plastic



[See Full Specs here](#)



Florida (HQ)
800-749-2447

California
951-696-7772

New York
845-391-8318

Texas
713-322-7242

verticalcable.com

This specification sheet is subject to change without notice.

Rev. 02/2026