



VERTICAL CABLE

CAT6 CMR RISER CABLE

UTP | 550 MHZ | ETL-LISTED

060 SERIES

DESCRIPTION

CAT6, 23 AWG, UTP, ETL-Listed, 8C Solid Copper, 550MHz, Riser Rated, PVC Jacket 1000 ft.

FEATURES

- Unshielded Twisted-Pair (UTP) Construction
- Riser Fire Safety Rating (CMR)
- 23 AWG Bare Copper Conductors
- Easy-to-See Vivid-Color Conductor Insulation & Jacket
- Meets or exceeds ANSI/TIA-568.2-D Transmission Performance Specifications
- Easily Identified Color-Striped Pairs
- Supports PoE++ (Type 3) IEEE 802.3bt (51W)
- ETL Listed, RoHS Compliant
- Designed in the USA, Imported Product
- 1000 ft. Pull Box
- Weight: 26 lb. (11.79 kg)



PART NUMBERS

060-487/BK	● (Black)	060-495/PK	● (Pink)
060-488/BL	● (Blue)	060-491/PR	● (Purple)
060-489/GR	● (Green)	060-492/RD	● (Red)
060-490/GY	● (Grey)	060-493/WH	○ (White)
060-2395/OR	● (Orange)	060-494/YL	● (Yellow)

CONDUCTOR

Size:

Solid Bare Copper
23 AWG

INSULATION

Average Thickness: 0.009 in. (0.22 mm)
Min. Point Thickness: 0.007 in. (0.19 mm)
Insulation Diameter: 0.04 in. (1.01 mm 0.005)
Twisted Pair Diameter: 0.08 in. (2.02 mm ±0.01)

SEPARATOR


PP

ASSEMBLY DIAMETER

0.2 in. (5.00 mm)

JACKET

Average Thickness: 0.024 in. (0.60 mm)
Min. Point Thickness: 0.02 in. (0.50 mm)
Outer Diameter: 0.24 in. (6.20 mm ±0.1)
Rip Cord: Yes
Color Coding: Pair 1: Blue/White-Blue Pair 2: Orange/White-Orange
Pair 3: Green/White-Green Pair 4: Brown/White-Brown
Marking: E502490 ETL CMR 75C UTP 4PR 23AWG FT4
550MHz CAT6 ANSI/TIA-568.2-D RoHS XXXXT

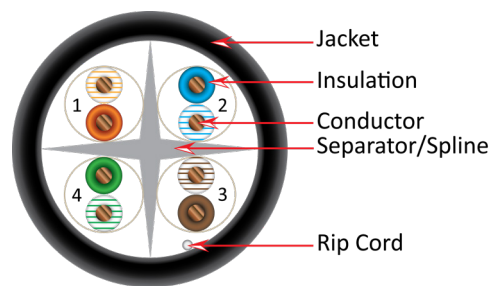

Florida (HQ)
800-749-2447

California
951-696-7772

New York
845-391-8318

Texas
713-322-7242

verticalcable.com

This specification sheet is subject to change without notice.



RoHS



Intertek

Rev. 02/2026