




VERTICAL CABLE

DESCRIPTION

Optical Fiber Surface-Mount Box, Standard-Series, LGX, One-Position

FEATURES

- Holds one (1) LGX adapter plate (up to 24 fibers)
- Durable 15-GA aluminum alloy, Black Powder-Coated Finish
- Single Door, Panel Fasteners
- Cable management: Two cable entry openings; two mounting positions for MPO adapters; cable anchor points; set of cable ties.
- Fiber management: anchor points, rings.
- Includes:
 - 1 × box with cover
 - 2 × panel fastener sets of cover latching
 - 2 × fiber management plastic rings with adhesive pads
 - 4 × nylon cable ties
 - 1 × shipping box
- Weight: 7 oz (200 g)

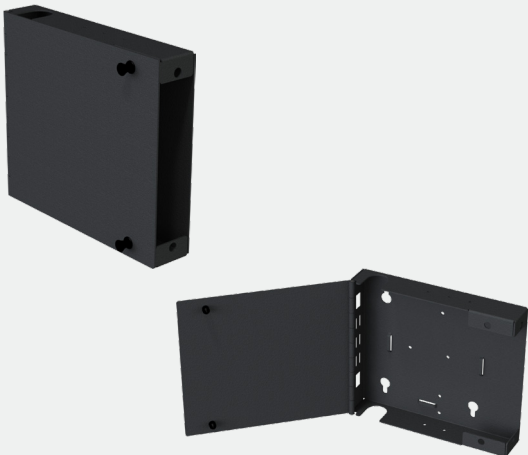

OPTICAL FIBER SURFACE-MOUNT BOX

STANDARD-SERIES | LGX | ONE-POSITION

268-SMB01-1A1

CHARACTERISTICS

Materials: 0.06 in. (1.5 mm) (15-GA) aluminum alloy; Black Powder Coating

Access: Single Door, Panel Fasteners ("push-pins"/"plunger locks")

Mounting: Surface/wall

CAPACITY

Adapter Plates: One LGX Adapter Plate

Optical Fibers: Up to 24 optical fibers

Splice Trays: Up to one 12-fiber splice holders

ENVIRONMENTAL

Operating Temperature: -20 °C--+70 °C (-4 °F--+158 °F)


Operating Humidity: ≤95 % RH non-condensing

DIMENSIONS

Height:	1.6 in. (40.64 mm)
Width:	6.3 in. (160.02 mm)
Depth:	1.3 in. (33.02 mm)

VERTICAL CABLE ACCESSORIES

1. 264-LAP Series LGX Adapter Plates
1. 268-ACC03-11-00 Splicing Stage
2. 265-HLD01-2B-00 Optical Fiber Splice Holder, Adhesive Mounting
3. 265-SLV01-3A-1H Optical Fiber Splice Protection Sleeve

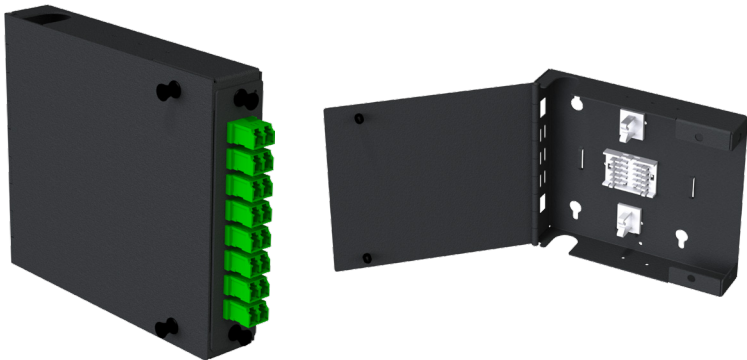

*Accessories NOT INCLUDED

Florida (HQ)
800-749-2447

California
951-696-7772

New York
845-391-8318

Texas
713-322-7242

verticalcable.com

This specification sheet is subject to change without notice.

Rev. 02/2026