



VERTICAL CABLE

OPTICAL FIBER RACK-MOUNT PANEL

LGX | 3-POSITION | 1 RMU

266-PMD01-1A3A

DESCRIPTION

Optical Fiber Rack-Mount Panel, LGX, Three-Position, 1 RMU

FEATURES

- Standard 19 in. rack/cabinet mount
- Holds three LGX adapter plates
- Black powder-coated finish
- 1 x Panel with integral cable management
- 1 x Set of mounting screws
- 1 x Shipping box
- EIA-ECA-310-E Compliant
- Weight: 0.6 lb (0.25 kg) without cable management

CHARACTERISTICS

Form-Factor: 19 in. rack/cabinet mounting standard (EIA-ECA-310-E)

Capacity: Three LGX Adapter Plates
Up to 72 Optical Fibers

Materials: Black powder coating

Cable Management: Set of USCU fasteners;
4 x #10-32 x 5/8 cross-recessed pan-head machine screws, black;
4 x #12-24 x 5/8 cross-recessed pan-head machine screws, black;
4 x #12 x 9/16 x 3/8 plain round washers, nylon, black


DIMENSIONS

Height:	1.75 in. (44.5 mm) [1 RMU]
Width:	19 in. (482.6 mm)
Depth (Panel Frame):	0.6 in. (15.24 mm)
Depth (with CMB):	5 in. (127 mm)

ENVIRONMENTAL

Operating Temperature: -20 °C--+70 °C (-4 °F--+158 °F)

Operating Humidity: ≤95% RH non-condensing

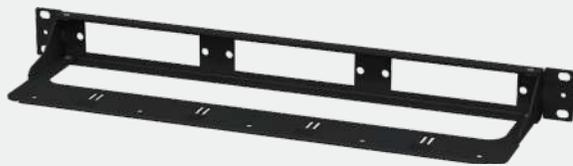

***IN PICTURE SHOWN: LOADED ADAPTER PLATES ARE AN EXAMPLE AND SOLD SEPARATELY - PART#'S: 264-LAP042C6Y1**

Florida (HQ)
800-749-2447

California
951-696-7772

New York
845-391-8318

Texas
713-322-7242

verticalcable.com

This specification sheet is subject to change without notice.

Rev. 03/2026