



VERTICAL CABLE

CAT6 DIRECT BURIAL CABLE

CMX | WATER-RESISTANT | UV-RESISTANT
23 AWG 8 CONDUCTOR (F/UTP)

069-561/CMXT

DESCRIPTION

CAT6 PoE++, 550 MHz, CMX Direct Burial, F/UTP Shielded, Water-Resistant (Dual Jacket) LLDPE Jacket, 23 AWG, Solid, Black

FEATURES

- Supports 10/100/1000BASE-T applications
- Fast Ethernet and 155Mbps TP-PMD/CDDI
- Outdoor UV-resistant/Water-Resistant jacket
- Direct Burial/Dual Jacket
- 550-MHz bandwidth supporting wide range of applications
- 23 AWG Solid Copper Conductors
- Easily identifiable pair insulation colors
- Exceeds ANSI/TIA-568.2-D and ISO/IEC 11801 specifications
- CAN/CSA-C22.2 No. 214, RoHS compliant
- ETL listed
- Weight: 50.3 lb (22.8 kg)



TRANSMISSION PERFORMANCE

Meets or exceeds ANSI/TIA-568.2-D and ISO/IEC 11801 specifications

CONSTRUCTION

Pairs:	4
Conductors:	8
Ripcord:	Nylon
Drain Wire:	Tinned Copper 0.02 in. (0.51 mm)
Separator Material:	High Density Polyethylene (HDPE)
Screen:	Foiled (F/UTP)

CONDUCTORS

Material:	Solid Bare Annealed Copper
Size:	23 AWG
Conductor Voltage Rating:	60 V _{RMS}

INSULATION


Diameter:	0.04 in. (1.02 mm)
Average Thickness:	0.01 in. (0.25 mm)
Insulation Rating:	300 V _{RMS}
Color Coding:	Pair 1: White-Blue/Blue Pair 2: White-Orange/Orange Pair 3: White-Green/Green Pair 4: White-Brown/Brown

INNER JACKET (GRAY)

Material:	Polyvinyl Chloride (PVC)
Outer Diameter:	0.28 in. (7.11 mm)
Average Thickness:	0.02 in. (0.51 mm)

OUTER JACKET (BLACK)

Material:	Linear Low Density Polyethylene (LLDPE)
Outdoor Rating:	UV-Resistant
Outdoor Diameter:	0.36 in. (9.20 mm)
Average Thickness:	0.0255 in. (0.65 mm)
Marking:	VERTICAL 4001453 cETLus VERIFIED F/UTP 4PR 23AWG OUTDOOR DIRECT BURIAL UV LLDPE CAT6 550MHz CMX 75C ANSI/TIA-568.2-D RoHS XXXXFT

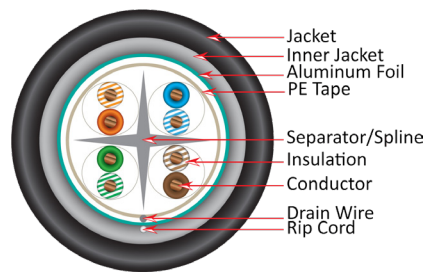

Florida (HQ)
800-749-2447

California
951-696-7772

New York
845-391-8318

Texas
713-322-7242

verticalcable.com

This specification sheet is subject to change without notice.



Rev. 04/2026

ELECTRICAL CHARACTERISTICS

Voltage Rating:	60 V _{RMS}
Characteristics Impedance:	100±15
Delay Skew:	<=45 (nS/100m)
Pair to Ground Capacitance:	<=330 (Pf/100m) Unbalance
Max. conductor DC Resistance:	93.8 (ohms/km) 20°C
Resistance Unbalance:	5%

MECHANICAL

Before Tensile Strength (Mpa):	≥14.8 MPa
Elongation After Aging (%):	≥100
Aging Conditions (°C × h):	100x240
Tensile Strength After Aging (Mpa):	≥85% of unaged
Elongation After Aging (%):	≥50% of unaged
Cold Bend (-40±2°C x 4hrs):	No Crack
Maximum Pulling Force:	100 N
Minimum Bending Radius:	8XOD

SAFETY

FPA 70 (NEC®) fire rating:	CMX
----------------------------	-----

ENVIRONMENTAL

Operating Temperature:	-40 °F-167 °F (-40 °C-75 °C)
------------------------	------------------------------

Frequency (Mhz)	Return Loss (Min db)	Attenuation Max (dB/100m)	Next Min (dB)	PSNext Min (dB)	ELFEXT Min (db/100m)	ACR Min (dB)
1	20.0	2.0	76.3	74.3	67.8	74.3
4	23.0	3.8	67.3	65.3	55.7	63.5
8	24.5	5.3	62.8	60.8	49.7	57.5
10	25.0	6.0	61.3	59.3	47.8	55.3
16	25.0	7.6	58.3	56.3	43.7	50.7
20	25.0	8.5	56.8	54.8	41.7	48.3
25	24.3	9.5	55.3	53.3	39.8	45.8
31.25	23.6	10.7	53.9	51.9	37.9	43.2
62.5	21.5	15.4	49.4	47.4	31.8	34.0
100	20.1	19.8	46.3	44.3	27.8	26.5
155	18.8	25.1	43.5	41.5	23.9	18.4
200	18.0	29.0	41.8	39.8	21.7	12.8
250	17.3	32.8	40.3	38.3	19.8	7.5
300	16.8	36.4	39.2	37.2	18.2	2.8
400	15.9	43.0	37.3	35.3	15.7	NA
500	15.5	47.2	35.4	33.6	13.4	NA
550	14.4	50.3	32.8	32.1	12.6	NA

Florida (HQ)
800-749-2447

California
951-696-7772

New York
845-391-8318

Texas
713-322-7242

verticalcable.com

This specification sheet is subject to change without notice.



RoHS



Intertek

Rev. 04/2026