



VERTICAL CABLE

# CAT6A PATCH CORD STRANDED 28 AWG

UTP (SLIM)

## 077 SERIES

### DESCRIPTION

CAT6A Patch Cords, Slim, Stranded  
28-AWG UTP, 8P8C ("RJ45") Modular Plugs

### FEATURES

- Stranded Bare Copper Conductors
- Supports IEEE 802.3at (PoE+ Type 2)
- Unshielded 8P8C ("RJ45") Modular Plugs
- 50-µin Gold Plated Contacts
- Flame-Retardant PVC Jacket
- CM Rated, UL Listed, RoHS Compliant
- T568B Wiring Scheme
- Available in various colors for easy Identification
- Available in Single & x24-Packs

Length	Weight
0.5 ft.	0.03 lb. (0.01 kg)
1 ft.	0.04 lb. (0.02 kg)
2 ft.	0.06 lb. (0.03 kg)
3 ft.	0.07 lb. (0.03 kg)
5 ft.	0.08 lb. (0.04 kg)
7 ft.	0.11 lb. (0.05 kg)
10 ft.	0.15 lb. (0.07 kg)
14 ft.	0.20 lb. (0.09 kg)
25 ft.	0.31 lb. (0.14 kg)
50 ft.	0.60 lb. (0.27 kg)
24-Pack	0.4 lb. (0.18 kg)



### PERFORMANCE

Meets or exceeds ANSI/TIA-568.2-D and ISO/IEC 118011 specifications

### CONSTRUCTION

Media:

4 Unscreened Twisted Pairs  
8 Stranded Conductors

Wiring Scheme:

ANSI/TIA-568.2: T568B  
ISO/IEC 118011: 8-position 1-2/3-6/  
4-5/7-8 pin/pair assignment  
Stranded Bare Copper 28 AWG

Conductors:

### INSULATION

Material:

High-Density Polyethylene (HDPE)

### JACKET

Material:

Polyvinyl chloride (PVC), Flame-retardant

Diameter:

0.15 in. (3.8 mm)

Marking:

E468535 (UL) C (UL) CM CAT.6A UTP 28AWG  
\*4P CABLE 10GIG UTP CAT6A 4PR 28AWG  
Stranded ANSI/TIA-568-D.2 & ISO/IEC 11801  
ROHS Compliant

### PLUGS

Type:

8P8C Modular Plugs ("RJ45")

Housing:

Flame-retardant polycarbonate (PC), 94V-0

Contacts:

50 µin gold plated

### ELECTRIC

Insulation Resistance:

10 M Ohm Min.

Contact Resistance:

2 Ohm Max

Hi-Pot Test:

300 V DC/10ms

Open Short,

Miss Wire Test:

-100%


### SAFETY

Voltage Rating:

300 V

Fire Rating:

UL444



Florida (HQ)  
800-749-2447

California  
951-696-7772

New York  
845-391-8318

Texas  
713-322-7242

verticalcable.com

This specification sheet is subject to change without notice.



Rev. 04/2026

Single Pack									
Size	Black	Blue	Green	Grey	Orange	Purple	Red	White	Yellow
½ FT	077-2010/05BK	077-2011/05BL	077-2010/05BK	077-2013/05GY	077-2014/05OR	077-2015/05PR	077-2016/05RD	077-2017/05WH	077-2018/05YL
1 FT	077-2019/1BK	077-2020/1BL	077-2021/1GR	077-2022/1GY	077-2023/1OR	077-2024/1PR	077-2025/1RD	077-2026/1WH	077-2027/1YL
2 FT	077-2028/2BK	077-2029/2BL	077-2030/2GR	077-2031/2GY	077-2032/2OR	077-2033/2PR	077-2034/2RD	077-2035/2WH	077-2036/2YL
3 FT	077-2037/3BK	077-2038/3BL	077-2039/3GR	077-2040/3GY	077-2041/3OR	077-2042/3PR	077-2043/3RD	077-2044/3WH	077-2045/3YL
5 FT	077-2046/5BK	077-2047/5BL	077-2048/5GR	077-2049/5GY	077-2050/5OR	077-2051/5PR	077-2052/5RD	077-2053/5WH	077-2054/5YL
7 FT	077-2064/7BK	077-2065/7BL	077-2066/7GR	077-2067/7GY	077-2068/7OR	077-2069/7PR	077-2070/7RD	077-2071/7WH	077-2072/7YL
10 FT	077-2073/10BK	077-2074/10BL	077-2075/10GR	077-2076/10GY	077-2077/10OR	077-2078/10PR	077-2079/10RD	077-2080/10WH	077-2081/10YL
14 FT	077-2082/14BK	077-2083/14BL	077-2084/14GR	077-2085/14GY	077-2086/14OR	077-2087/14PR	077-2088/14RD	077-2089/14WH	077-2090/14YL
25 FT	077-2100/25BK	077-2101/25BL	077-2102/25GR	077-2103/25GY	077-2104/25OR	077-2105/25PR	077-2106/25RD	077-2107/25WH	077-2108/25YL
50 FT	077-2109/50BK	077-2110/50BL	077-2111/50GR	077-2112/50GY	077-2113/50OR	077-2114/50PR	077-2115/50RD	077-2116/50WH	077-2117/50YL

24-PACK	
077-3000/05BK24	● (Black)
077-3001/05BL24	● (Blue)
077-3002/05GR24	● (Green)
077-3003/05GY24	● (Grey)
077-3004/05OR24	● (Orange)
077-3005/05PR24	● (Purple)
077-3006/05RD24	● (Red)
077-3007/05WH24	○ (White)
077-3008/05YL24	● (Yellow)

Florida (HQ)  
800-749-2447

California  
951-696-7772

New York  
845-391-8318

Texas  
713-322-7242

verticalcable.com

This specification sheet is subject to change without notice.



Rev. 04/2026



## Cable ID: CAT6A SLIM 077 05

Test Limit: TIA Cat 6A Channel

Limits Version: V7.5

Date / Time: 01/29/2021 02:29:50 PM

Operator: VERTICAL TECH

Headroom 21.1 dB (NEXT 3,6-4,5)

Cable Type: Cat 6A U/UTP

NVP: 68.2%

Main: Versiv

S/N: 3676207

Software Version: V6.5 Build 5

Calibration Date: 01/26/2017

Adapter: DSX-5000 (DSX-CHA004)

S/N: 3681012

## Test Summary: PASS

Remote: Versiv

S/N: 3687009



Software Version: V6.5 Build 5

Calibration Date: 01/26/2017

Adapter: DSX-5000R (DSX-CHA004)


S/N: 3681674

Length (ft), Limit 328	[Pair 3,6]	0
Prop. Delay (ns), Limit 555	[Pair 1,2]	1
Delay Skew (ns), Limit 50	[Pair 1,2]	1
Resistance (ohms)	[Pair 7,8]	0.01
Insertion Loss Margin (dB)	[Pair 1,2]	13.0
Frequency (MHz)	[Pair 1,2]	40.3
Limit (dB)	[Pair 1,2]	13.1

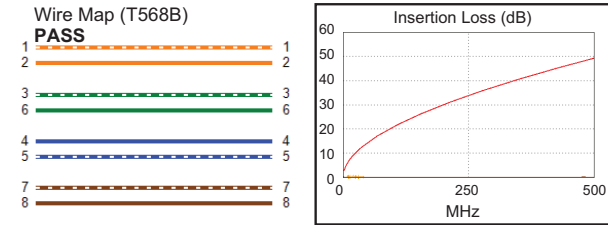


### Worst Case Margin Worst Case Value


	MAIN	SR	MAIN	SR
<b>PASS</b>				
Worst Pair	3,6-4,5	3,6-4,5	3,6-4,5	3,6-4,5
<b>NEXT (dB)</b>	21.1	21.4	27.6	26.7
Freq. (MHz)	3.1	3.4	500.0	500.0
Limit (dB)	64.8	64.2	26.1	26.1
Worst Pair	3,6	3,6	3,6	3,6
<b>PS NEXT (dB)</b>	22.2	21.7	29.5	28.6
Freq. (MHz)	3.4	3.4	500.0	500.0
Limit (dB)	61.7	61.7	23.2	23.2

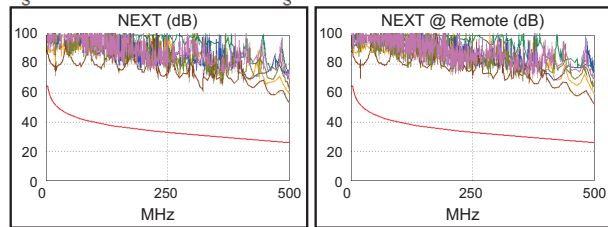


	MAIN	SR	MAIN	SR
<b>PASS</b>				
Worst Pair	3,6-4,5	4,5-3,6	3,6-4,5	4,5-3,6
<b>ACR-F (dB)</b>	17.9	17.9	18.1	18.1
Freq. (MHz)	355.0	355.0	367.0	367.0
Limit (dB)	12.3	12.3	12.0	12.0
Worst Pair	4,5	3,6	4,5	3,6
<b>PS ACR-F (dB)</b>	20.8	20.7	20.9	21.1
Freq. (MHz)	355.0	355.0	367.0	375.0
Limit (dB)	9.3	9.3	9.0	8.8

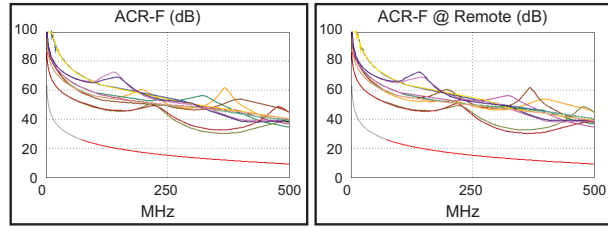

	MAIN	SR	MAIN	SR
<b>N/A</b>				
Worst Pair	3,6-4,5	3,6-4,5	3,6-4,5	3,6-4,5
<b>ACR-N (dB)</b>	24.8	25.2	76.9	76.0
Freq. (MHz)	3.1	3.4	500.0	500.0
Limit (dB)	61.1	60.4	-23.2	-23.2
Worst Pair	3,6	3,6	3,6	3,6
<b>PS ACR-N (dB)</b>	26.0	25.5	78.8	77.9
Freq. (MHz)	3.4	3.4	500.0	500.0
Limit (dB)	57.9	57.9	-26.1	-26.1

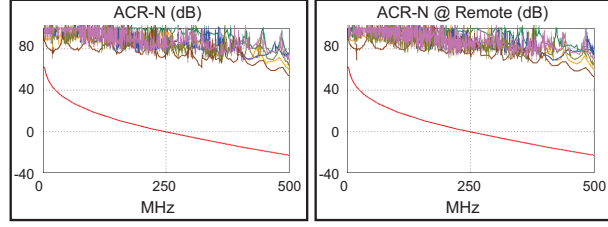

	MAIN	SR	MAIN	SR
<b>N/A</b>				
Worst Pair	3,6	3,6	4,5	3,6
<b>RL (dB)</b>	8.8	10.7	9.5	12.6
Freq. (MHz)	1.0	1.0	500.0	500.0
Limit (dB)	19.0	19.0	6.0	6.0

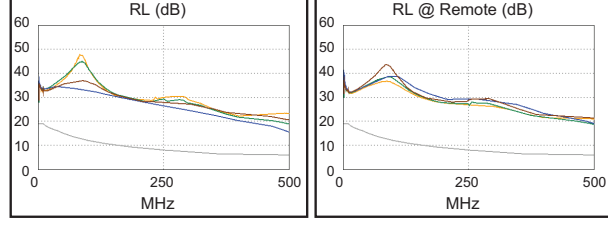

Compliant Network Standards:

10BASE-T	100BASE-TX	100BASE-T4
1000BASE-T	2.5GBASE-T	5GBASE-T
10GBASE-T	ATM-25	ATM-51
ATM-155	100VG-AnyLan	TR-4
TR-16 Active	TR-16 Passive	

LinkWare™ PC Version 10.7

Project: DEFAULT  
077 SLIM PATCH CABLES.flw

Page 3



Florida (HQ)  
800-749-2447

California  
951-696-7772

New York  
845-391-8318

Texas  
713-322-7242

verticalcable.com

This specification sheet is subject to change without notice.



Rev. 04/2026



## Cable ID: CAT6A SLIM 077 1

Test Limit: TIA Cat 6A Channel



Limits Version: V7.5  
 Date / Time: 01/29/2021 02:31:45 PM  
 Operator: VERTICAL TECH  
**Headroom 22.1 dB (NEXT 3,6-4,5)**  
 Cable Type: Cat 6A U/UTP  
 NVP: 68.2%

Main: Versiv  
 S/N: 3676207  
 Software Version: V6.5 Build 5  
 Calibration Date: 01/26/2017  
 Adapter: DSX-5000 (DSX-CHA004)  
 S/N: 3681012

## Test Summary: PASS


Remote: Versiv  
 S/N: 3687009  
 Software Version: V6.5 Build 5  
 Calibration Date: 01/26/2017  
 Adapter: DSX-5000R (DSX-CHA004)  
 S/N: 3681674

Length (ft), Limit 328	[Pair 1,2]	1
Prop. Delay (ns), Limit 555	[Pair 1,2]	1
Delay Skew (ns), Limit 50	[Pair 1,2]	0
Resistance (ohms)	[Pair 7,8]	0.15
Insertion Loss Margin (dB)	[Pair 7,8]	36.8
Frequency (MHz)	[Pair 7,8]	295.0
Limit (dB)	[Pair 7,8]	37.0

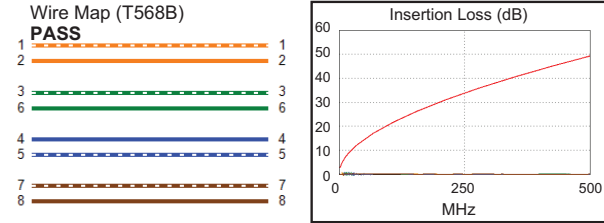


Worst Case Margin Worst Case Value


PASS	MAIN	SR	MAIN	SR
Worst Pair	3,6-4,5	3,6-4,5	3,6-4,5	3,6-4,5
<b>NEXT (dB)</b>	22.1	24.2	30.9	30.4
Freq. (MHz)	19.0	18.5	497.0	499.0
Limit (dB)	52.0	52.2	26.2	26.1
Worst Pair	3,6	3,6	3,6	3,6
<b>PS NEXT (dB)</b>	24.6	24.9	32.3	32.2
Freq. (MHz)	19.0	3.9	497.0	499.0
Limit (dB)	49.3	60.8	23.3	23.3

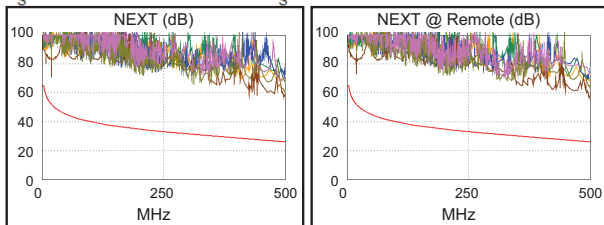


PASS	MAIN	SR	MAIN	SR
Worst Pair	3,6-4,5	4,5-3,6	3,6-4,5	4,5-3,6
<b>ACR-F (dB)</b>	17.5	17.4	17.7	17.7
Freq. (MHz)	468.0	460.0	476.0	476.0
Limit (dB)	9.9	10.0	9.7	9.7
Worst Pair	4,5	3,6	4,5	3,6
<b>PS ACR-F (dB)</b>	20.1	20.0	20.6	20.2
Freq. (MHz)	445.0	460.0	476.0	476.0
Limit (dB)	7.3	7.0	6.7	6.7

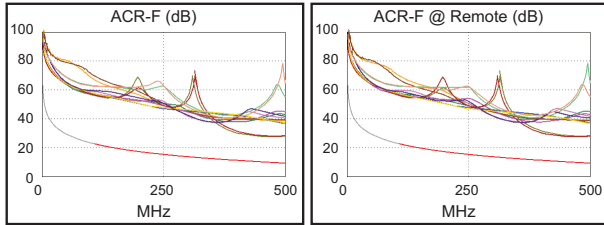

N/A	MAIN	SR	MAIN	SR
Worst Pair	3,6-4,5	3,6-4,5	3,6-4,5	3,6-4,5
<b>ACR-N (dB)</b>	27.8	28.4	80.1	79.6
Freq. (MHz)	3.1	3.9	497.0	499.0
Limit (dB)	61.1	59.2	-23.0	-23.1
Worst Pair	3,6	3,6	3,6	3,6
<b>PS ACR-N (dB)</b>	28.9	28.8	81.4	81.5
Freq. (MHz)	3.3	3.3	497.0	499.0
Limit (dB)	58.2	58.2	-25.8	-26.0

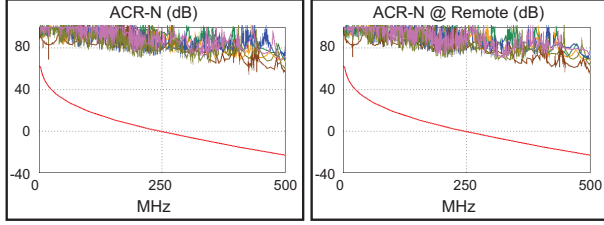

N/A	MAIN	SR	MAIN	SR
Worst Pair	4,5	4,5	4,5	4,5
<b>RL (dB)</b>	8.7	10.1	8.7	10.1
Freq. (MHz)	500.0	500.0	500.0	500.0
Limit (dB)	6.0	6.0	6.0	6.0

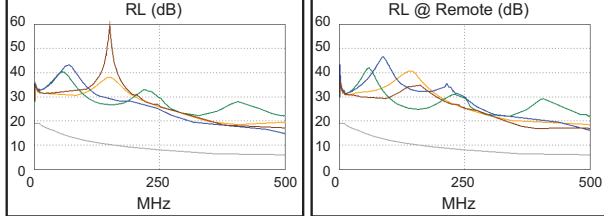

Compliant Network Standards:  
 10BASE-T      100BASE-TX      100BASE-T4  
 1000BASE-T    2.5GBASE-T      5GBASE-T  
 10GBASE-T    ATM-25            ATM-51  
 ATM-155      100VG-AnyLan    TR-4  
 TR-16 Active    TR-16 Passive

LinkWare™ PC Version 10.7

Project: DEFAULT  
 077 SLIM PATCH CABLES.flw



Florida (HQ)  
 800-749-2447

California  
 951-696-7772

New York  
 845-391-8318

Texas  
 713-322-7242





## Cable ID: CAT6A SLIM 077 2

Test Limit: TIA Cat 6A Channel



Limits Version: V7.5  
 Date / Time: 01/29/2021 02:35:45 PM  
 Operator: VERTICAL TECH  
**Headroom 19.4 dB (NEXT 3,6-4,5)**  
 Cable Type: Cat 6A U/UTP  
 NVP: 68.2%

Main: Versiv  
 S/N: 3676207  
 Software Version: V6.5 Build 5  
 Calibration Date: 01/26/2017  
 Adapter: DSX-5000 (DSX-CHA004)  
 S/N: 3681012

## Test Summary: PASS


Remote: Versiv  
 S/N: 3687009  
 Software Version: V6.5 Build 5  
 Calibration Date: 01/26/2017  
 Adapter: DSX-5000R (DSX-CHA004)  
 S/N: 3681674

Length (ft), Limit 328	[Pair 1,2]	2
Prop. Delay (ns), Limit 555	[Pair 1,2]	3
Delay Skew (ns), Limit 50	[Pair 1,2]	0
Resistance (ohms)	[Pair 7,8]	0.30
Insertion Loss Margin (dB)	[Pair 1,2]	46.8
Frequency (MHz)	[Pair 1,2]	466.0
Limit (dB)	[Pair 1,2]	47.4

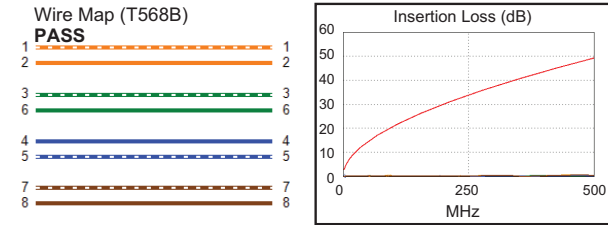


Worst Case Margin Worst Case Value


PASS	MAIN	SR	MAIN	SR
Worst Pair	1,2-3,6	3,6-4,5	3,6-4,5	3,6-4,5
<b>NEXT (dB)</b>	24.3	19.4	32.3	28.8
Freq. (MHz)	3.4	15.5	498.0	500.0
Limit (dB)	64.2	53.5	26.1	26.1
Worst Pair	3,6	3,6	3,6	3,6
<b>PS NEXT (dB)</b>	23.1	21.3	30.9	30.8
Freq. (MHz)	3.5	15.5	498.0	500.0
Limit (dB)	61.5	50.8	23.3	23.2

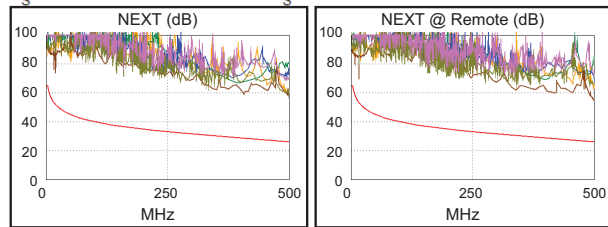


PASS	MAIN	SR	MAIN	SR
Worst Pair	3,6-4,5	4,5-3,6	3,6-4,5	4,5-3,6
<b>ACR-F (dB)</b>	15.5	15.2	15.8	15.4
Freq. (MHz)	384.0	384.0	394.0	391.0
Limit (dB)	11.6	11.6	11.3	11.4
Worst Pair	4,5	3,6	4,5	3,6
<b>PS ACR-F (dB)</b>	18.3	17.8	18.3	17.8
Freq. (MHz)	383.0	384.0	383.0	384.0
Limit (dB)	8.6	8.6	8.6	8.6

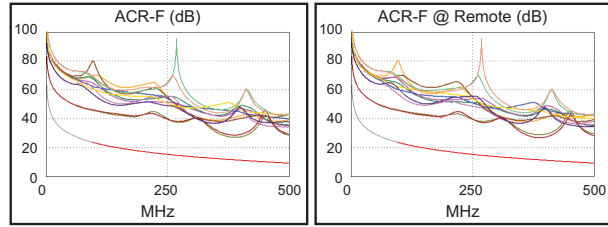

N/A	MAIN	SR	MAIN	SR
Worst Pair	1,2-3,6	3,6-4,5	3,6-4,5	3,6-4,5
<b>ACR-N (dB)</b>	27.6	26.5	81.3	77.9
Freq. (MHz)	1.8	1.9	498.0	500.0
Limit (dB)	62.0	62.0	-23.1	-23.2
Worst Pair	3,6	3,6	3,6	3,6
<b>PS ACR-N (dB)</b>	26.9	26.5	79.7	79.7
Freq. (MHz)	1.8	3.4	498.0	500.0
Limit (dB)	59.0	57.9	-25.9	-26.1

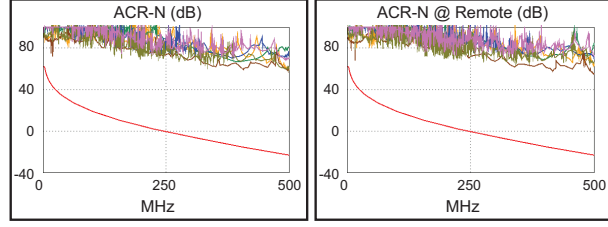

N/A	MAIN	SR	MAIN	SR
Worst Pair	1,2	1,2	1,2	7,8
<b>RL (dB)</b>	6.4	6.0	7.5	6.7
Freq. (MHz)	92.3	98.8	468.0	327.0
Limit (dB)	12.4	12.1	6.0	6.9

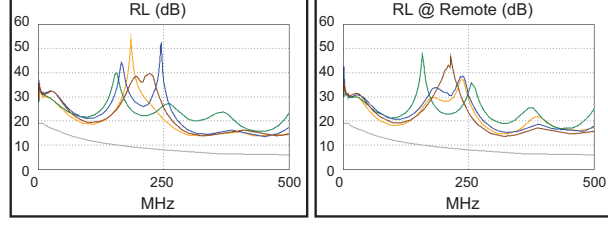

Compliant Network Standards:  
 10BASE-T      100BASE-TX      100BASE-T4  
 1000BASE-T      2.5GBASE-T      5GBASE-T  
 10GBASE-T      ATM-25      ATM-51  
 ATM-155      100VG-AnyLan      TR-4  
 TR-16 Active      TR-16 Passive

LinkWare™ PC Version 10.7

Project: DEFAULT  
 077 SLIM PATCH CABLES.flw

Page 5



Florida (HQ)  
 800-749-2447

California  
 951-696-7772

New York  
 845-391-8318

Texas  
 713-322-7242

verticalcable.com

This specification sheet is subject to change without notice.



Rev. 04/2026



### Cable ID: CAT6A SLIM 077 3

Test Limit: TIA Cat 6A Channel



Limits Version: V7.5  
 Date / Time: 01/29/2021 02:36:50 PM  
 Operator: VERTICAL TECH  
**Headroom 22.4 dB (NEXT 3,6-4,5)**  
 Cable Type: Cat 6A U/UTP  
 NVP: 68.2%

Main: Versiv  
 S/N: 3676207  
 Software Version: V6.5 Build 5  
 Calibration Date: 01/26/2017  
 Adapter: DSX-5000 (DSX-CHA004)  
 S/N: 3681012


### Test Summary: PASS

Remote: Versiv  
 S/N: 3687009  
 Software Version: V6.5 Build 5  
 Calibration Date: 01/26/2017  
 Adapter: DSX-5000R (DSX-CHA004)  
 S/N: 3681674


Length (ft), Limit 328	[Pair 1,2]	3
Prop. Delay (ns), Limit 555	[Pair 1,2]	4
Delay Skew (ns), Limit 50	[Pair 1,2]	0
Resistance (ohms)	[Pair 1,2]	0.38
Insertion Loss Margin (dB)	[Pair 3,6]	47.6
Frequency (MHz)	[Pair 3,6]	482.0
Limit (dB)	[Pair 3,6]	48.3

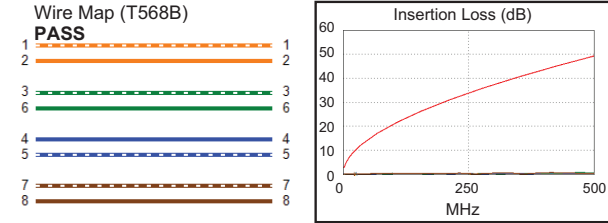


	Worst Case Margin		Worst Case Value	
	MAIN	SR	MAIN	SR
<b>PASS</b>				
Worst Pair	3,6-4,5	3,6-4,5	3,6-4,5	3,6-4,5
<b>NEXT (dB)</b>	23.1	22.4	24.2	27.2
Freq. (MHz)	3.9	3.9	480.0	483.0
Limit (dB)	63.3	63.3	26.6	26.5
Worst Pair	3,6	3,6	4,5	4,5
<b>PS NEXT (dB)</b>	22.4	22.3	26.4	29.3
Freq. (MHz)	3.9	3.9	480.0	483.0
Limit (dB)	60.8	60.8	23.7	23.6

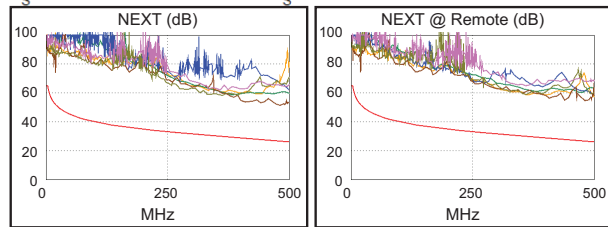


	MAIN	SR	MAIN	SR
<b>PASS</b>				
Worst Pair	3,6-4,5	4,5-3,6	3,6-4,5	4,5-3,6
<b>ACR-F (dB)</b>	16.7	16.4	16.7	16.5
Freq. (MHz)	478.0	479.0	478.0	481.0
Limit (dB)	9.7	9.7	9.7	9.6
Worst Pair	4,5	3,6	4,5	3,6
<b>PS ACR-F (dB)</b>	19.5	19.3	19.5	19.4
Freq. (MHz)	478.0	479.0	478.0	481.0
Limit (dB)	6.7	6.7	6.7	6.6

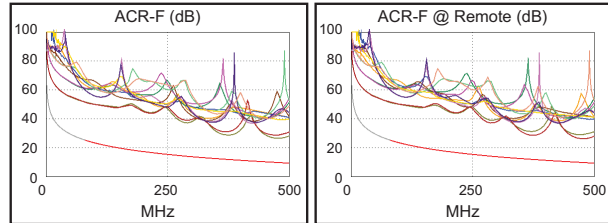

N/A	MAIN	SR	MAIN	SR
Worst Pair	3,6-4,5	3,6-4,5	3,6-4,5	3,6-4,5
<b>ACR-N (dB)</b>	27.1	26.4	72.1	75.3
Freq. (MHz)	3.9	3.9	480.0	483.0
Limit (dB)	59.2	59.2	-21.6	-21.9
Worst Pair	3,6	3,6	3,6	3,6
<b>PS ACR-N (dB)</b>	26.4	26.3	74.3	77.6
Freq. (MHz)	3.9	3.9	480.0	488.0
Limit (dB)	56.7	56.7	-24.5	-25.1

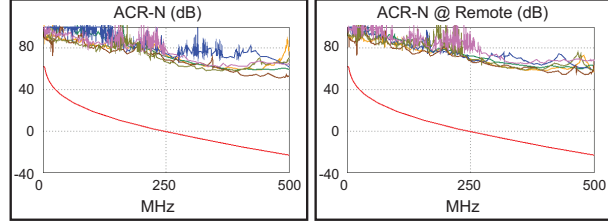

N/A	MAIN	SR	MAIN	SR
Worst Pair	7,8	7,8	7,8	7,8
<b>RL (dB)</b>	7.0	6.6	7.0	7.5
Freq. (MHz)	433.0	71.5	433.0	427.0
Limit (dB)	6.0	13.5	6.0	6.0

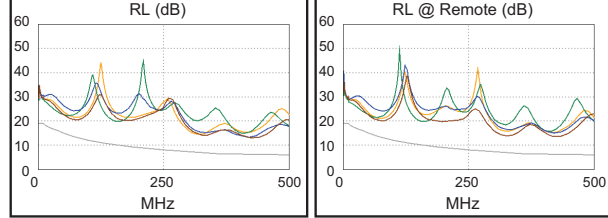

Compliant Network Standards:  
 10BASE-T      100BASE-TX      100BASE-T4  
 1000BASE-T    2.5GBASE-T      5GBASE-T  
 10GBASE-T      ATM-25            ATM-51  
 ATM-155        100VG-AnyLan    TR-4  
 TR-16 Active    TR-16 Passive

LinkWare™ PC Version 10.7

Project: DEFAULT  
 077 SLIM PATCH CABLES.flw

Page 6



Florida (HQ)  
 800-749-2447

California  
 951-696-7772

New York  
 845-391-8318

Texas  
 713-322-7242

verticalcable.com

This specification sheet is subject to change without notice.



Rev. 04/2026



## Cable ID: CAT6A SLIM 077 5

Test Limit: TIA Cat 6A Channel



Limits Version: V7.5  
 Date / Time: 01/29/2021 02:37:59 PM  
 Operator: VERTICAL TECH  
**Headroom 9.8 dB (NEXT 1,2-3,6)**  
 Cable Type: Cat 6A U/UTP  
 NVP: 68.2%

Main: Versiv  
 S/N: 3676207  
 Software Version: V6.5 Build 5  
 Calibration Date: 01/26/2017  
 Adapter: DSX-5000 (DSX-CHA004)  
 S/N: 3681012

## Test Summary: PASS


Remote: Versiv  
 S/N: 3687009  
 Software Version: V6.5 Build 5  
 Calibration Date: 01/26/2017  
 Adapter: DSX-5000R (DSX-CHA004)  
 S/N: 3681674

Length (ft), Limit 328	[Pair 1,2]	5
Prop. Delay (ns), Limit 555	[Pair 3,6]	7
Delay Skew (ns), Limit 50	[Pair 1,2]	0
Resistance (ohms)	[Pair 7,8]	0.66
Insertion Loss Margin (dB)	[Pair 3,6]	47.8
Frequency (MHz)	[Pair 3,6]	497.0
Limit (dB)	[Pair 3,6]	49.1

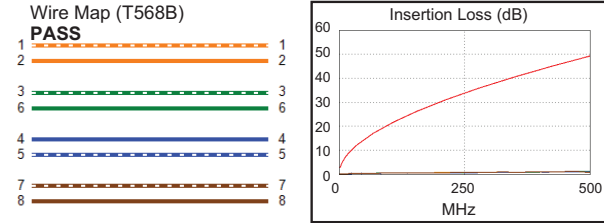


Worst Case Margin Worst Case Value


PASS	MAIN	SR	MAIN	SR
Worst Pair	1,2-3,6	1,2-3,6	1,2-3,6	1,2-3,6
<b>NEXT (dB)</b>	9.9	9.8	10.9	10.5
Freq. (MHz)	357.0	360.0	407.0	407.0
Limit (dB)	30.1	30.0	28.5	28.5
Worst Pair	1,2	1,2	3,6	3,6
<b>PS NEXT (dB)</b>	12.6	12.3	13.0	12.7
Freq. (MHz)	354.0	360.0	407.0	404.0
Limit (dB)	27.2	27.0	25.6	25.7

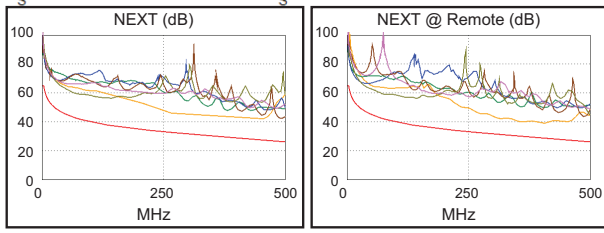


PASS	MAIN	SR	MAIN	SR
Worst Pair	3,6-4,5	4,5-3,6	3,6-4,5	4,5-3,6
<b>ACR-F (dB)</b>	12.6	12.4	12.6	12.4
Freq. (MHz)	500.0	500.0	500.0	500.0
Limit (dB)	9.3	9.3	9.3	9.3
Worst Pair	3,6	3,6	3,6	3,6
<b>PS ACR-F (dB)</b>	15.3	15.1	15.3	15.1
Freq. (MHz)	500.0	500.0	500.0	500.0
Limit (dB)	6.3	6.3	6.3	6.3

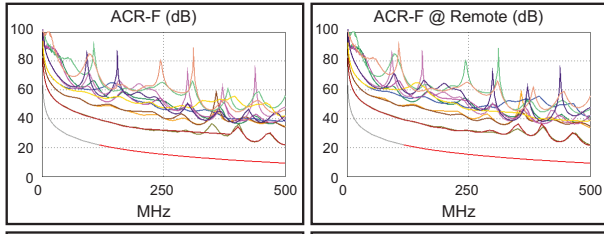

N/A	MAIN	SR	MAIN	SR
Worst Pair	1,2-7,8	1,2-4,5	1,2-3,6	1,2-3,6
<b>ACR-N (dB)</b>	23.8	22.9	53.9	53.5
Freq. (MHz)	3.9	3.9	407.0	407.0
Limit (dB)	59.2	59.2	-15.5	-15.5
Worst Pair	1,2	1,2	3,6	3,6
<b>PS ACR-N (dB)</b>	23.6	22.6	56.1	55.9
Freq. (MHz)	3.9	3.9	407.0	406.0
Limit (dB)	56.7	56.7	-18.5	-18.4

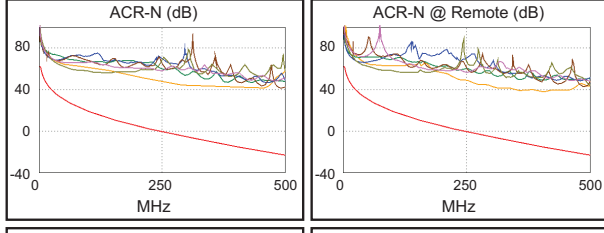

N/A	MAIN	SR	MAIN	SR
Worst Pair	7,8	7,8	7,8	7,8
<b>RL (dB)</b>	4.9	4.4	7.4	7.4
Freq. (MHz)	41.0	40.3	469.0	399.0
Limit (dB)	15.9	16.0	6.0	6.0

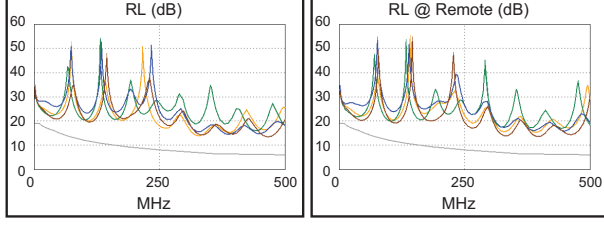

Compliant Network Standards:  
 10BASE-T      100BASE-TX      100BASE-T4  
 1000BASE-T    2.5GBASE-T      5GBASE-T  
 10GBASE-T      ATM-25            ATM-51  
 ATM-155        100VG-AnyLan    TR-4  
 TR-16 Active    TR-16 Passive

LinkWare™ PC Version 10.7

Project: DEFAULT  
 077 SLIM PATCH CABLES.flw



Florida (HQ)  
 800-749-2447

California  
 951-696-7772

New York  
 845-391-8318

Texas  
 713-322-7242





## Cable ID: CAT6A SLIM 077 7

Test Limit: TIA Cat 6A Channel

Limits Version: V7.5

Date / Time: 01/29/2021 02:39:13 PM

Operator: VERTICAL TECH

Headroom 15.7 dB (NEXT 3,6-4,5)

Cable Type: Cat 6A U/UTP

NVP: 68.2%

Main: Versiv

S/N: 3676207

Software Version: V6.5 Build 5

Calibration Date: 01/26/2017

Adapter: DSX-5000 (DSX-CHA004)

S/N: 3681012

## Test Summary: PASS

Remote: Versiv

S/N: 3687009



Software Version: V6.5 Build 5

Calibration Date: 01/26/2017

Adapter: DSX-5000R (DSX-CHA004)


S/N: 3681674

Length (ft), Limit 328	[Pair 1,2]	7
Prop. Delay (ns), Limit 555	[Pair 1,2]	10
Delay Skew (ns), Limit 50	[Pair 1,2]	0
Resistance (ohms)	[Pair 1,2]	0.99
Insertion Loss Margin (dB)	[Pair 3,6]	47.1
Frequency (MHz)	[Pair 3,6]	500.0
Limit (dB)	[Pair 3,6]	49.3

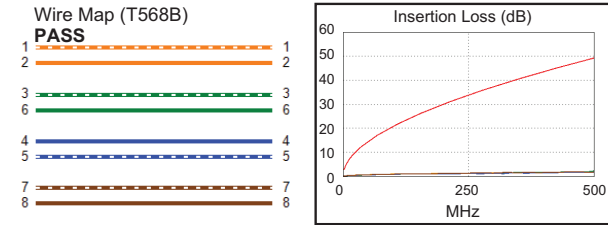


### Worst Case Margin Worst Case Value


PASS	MAIN	SR	MAIN	SR
Worst Pair	3,6-4,5	3,6-4,5	3,6-4,5	1,2-3,6
<b>NEXT (dB)</b>	15.7	15.8	15.7	17.1
Freq. (MHz)	375.0	380.0	375.0	474.0
Limit (dB)	29.5	29.3	29.5	26.7
Worst Pair	3,6	7,8	3,6	1,2
<b>PS NEXT (dB)</b>	17.3	16.6	20.3	19.0
Freq. (MHz)	374.0	10.6	486.0	474.0
Limit (dB)	26.6	53.6	23.6	23.8

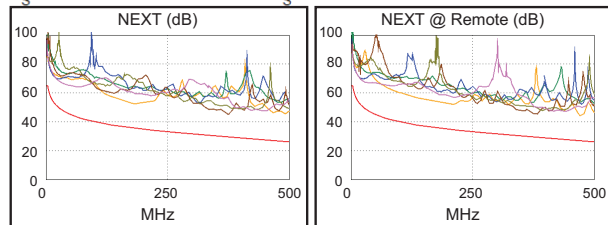


PASS	MAIN	SR	MAIN	SR
Worst Pair	3,6-4,5	4,5-3,6	3,6-4,5	4,5-3,6
<b>ACR-F (dB)</b>	16.4	16.1	17.3	16.8
Freq. (MHz)	402.0	402.0	451.0	451.0
Limit (dB)	11.2	11.2	10.2	10.2
Worst Pair	4,5	3,6	4,5	3,6
<b>PS ACR-F (dB)</b>	19.2	18.8	20.1	19.3
Freq. (MHz)	402.0	402.0	451.0	453.0
Limit (dB)	8.2	8.2	7.2	7.1

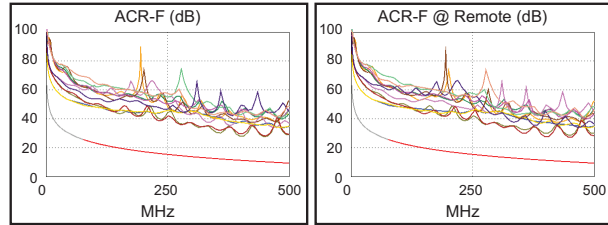

N/A	MAIN	SR	MAIN	SR
Worst Pair	1,2-3,6	1,2-3,6	1,2-3,6	1,2-3,6
<b>ACR-N (dB)</b>	21.5	22.4	66.2	63.3
Freq. (MHz)	3.4	3.1	492.0	474.0
Limit (dB)	60.4	61.1	-22.6	-21.2
Worst Pair	1,2	7,8	3,6	1,2
<b>PS ACR-N (dB)</b>	21.7	21.4	68.0	64.9
Freq. (MHz)	3.4	3.8	498.0	474.0
Limit (dB)	57.9	57.0	-25.9	-24.0

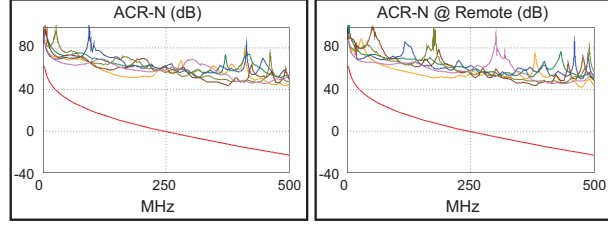

N/A	MAIN	SR	MAIN	SR
Worst Pair	1,2	1,2	4,5	7,8
<b>RL (dB)</b>	8.1	7.7	11.0	10.5
Freq. (MHz)	10.0	10.0	352.0	381.0
Limit (dB)	19.0	19.0	6.5	6.2

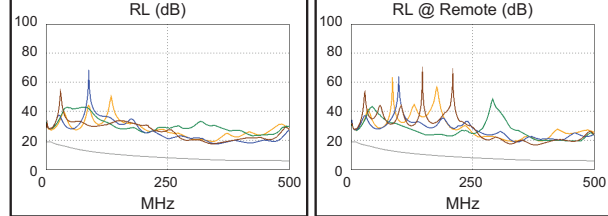

Compliant Network Standards:

10BASE-T	100BASE-TX	100BASE-T4
1000BASE-T	2.5GBASE-T	5GBASE-T
10GBASE-T	ATM-25	ATM-51
ATM-155	100VG-AnyLan	TR-4
TR-16 Active	TR-16 Passive	

LinkWare™ PC Version 10.7

Project: DEFAULT  
077 SLIM PATCH CABLES.flw

Page 8



Florida (HQ)  
800-749-2447

California  
951-696-7772

New York  
845-391-8318

Texas  
713-322-7242

verticalcable.com

This specification sheet is subject to change without notice.



Rev. 04/2026



### Cable ID: CAT6A SLIM 077 10

Test Limit: TIA Cat 6A Channel



Limits Version: V7.5  
Date / Time: 01/29/2021 02:40:15 PM  
Operator: VERTICAL TECH  
Headroom 10.2 dB (NEXT 1,2-3,6)  
Cable Type: Cat 6A U/UTP  
NVP: 68.2%

Main: Versiv  
S/N: 3676207  
Software Version: V6.5 Build 5  
Calibration Date: 01/26/2017  
Adapter: DSX-5000 (DSX-CHA004)  
S/N: 3681012

### Test Summary: PASS


Remote: Versiv  
S/N: 3687009  
Software Version: V6.5 Build 5  
Calibration Date: 01/26/2017  
Adapter: DSX-5000R (DSX-CHA004)  
S/N: 3681674

Length (ft), Limit 328	[Pair 1,2]	10
Prop. Delay (ns), Limit 555	[Pair 3,6]	15
Delay Skew (ns), Limit 50	[Pair 1,2]	0
Resistance (ohms)	[Pair 4,5]	1.26
Insertion Loss Margin (dB)	[Pair 7,8]	46.7
Frequency (MHz)	[Pair 7,8]	500.0
Limit (dB)	[Pair 7,8]	49.3

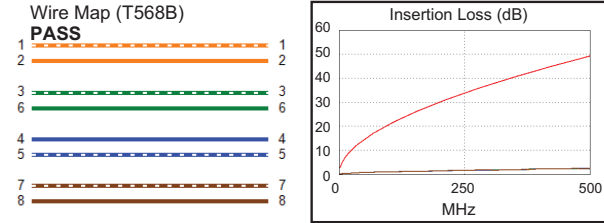


Worst Case Margin Worst Case Value


PASS	MAIN	SR	MAIN	SR
Worst Pair	1,2-3,6	1,2-3,6	1,2-7,8	1,2-7,8
<b>NEXT (dB)</b>	10.2	10.6	11.2	12.5
Freq. (MHz)	117.0	120.0	431.0	435.0
Limit (dB)	38.8	38.6	27.9	27.7
Worst Pair	1,2	1,2	7,8	7,8
<b>PS NEXT (dB)</b>	12.1	12.5	13.1	13.8
Freq. (MHz)	14.1	134.5	432.0	434.0
Limit (dB)	51.5	34.9	24.9	24.9

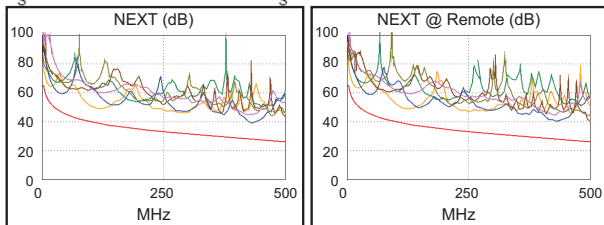


PASS	MAIN	SR	MAIN	SR
Worst Pair	4,5-3,6	3,6-4,5	4,5-3,6	3,6-4,5
<b>ACR-F (dB)</b>	16.0	16.1	16.0	16.2
Freq. (MHz)	483.0	484.0	483.0	485.0
Limit (dB)	9.6	9.6	9.6	9.5
Worst Pair	3,6	3,6	3,6	3,6
<b>PS ACR-F (dB)</b>	18.3	18.7	18.6	18.7
Freq. (MHz)	448.0	484.0	483.0	484.0
Limit (dB)	7.2	6.6	6.6	6.6

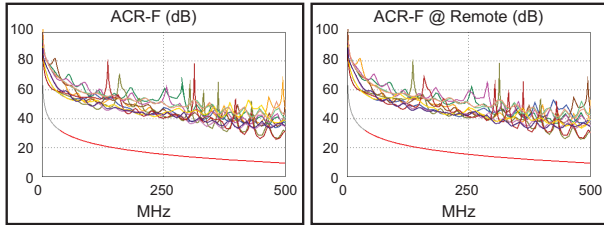

N/A	MAIN	SR	MAIN	SR
Worst Pair	1,2-3,6	1,2-3,6	1,2-7,8	1,2-7,8
<b>ACR-N (dB)</b>	15.6	16.8	54.6	55.9
Freq. (MHz)	4.0	7.8	432.0	435.0
Limit (dB)	58.9	52.7	-17.7	-18.0
Worst Pair	3,6	3,6	7,8	7,8
<b>PS ACR-N (dB)</b>	16.9	18.3	56.3	57.2
Freq. (MHz)	4.6	3.9	432.0	434.0
Limit (dB)	55.1	56.7	-20.6	-20.8

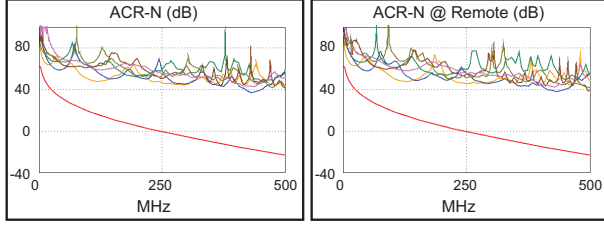

N/A	MAIN	SR	MAIN	SR
Worst Pair	1,2	3,6	1,2	7,8
<b>RL (dB)</b>	3.7	3.7	9.3	9.1
Freq. (MHz)	9.9	10.6	396.0	402.0
Limit (dB)	19.0	18.9	6.0	6.0

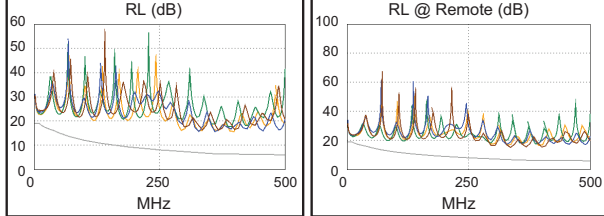

Compliant Network Standards:  
 10BASE-T      100BASE-TX      100BASE-T4  
 1000BASE-T    2.5GBASE-T      5GBASE-T  
 10GBASE-T      ATM-25            ATM-51  
 ATM-155        100VG-AnyLan    TR-4  
 TR-16 Active    TR-16 Passive

LinkWare™ PC Version 10.7

Project: DEFAULT  
077 SLIM PATCH CABLES.flw

Page 9



Florida (HQ)  
800-749-2447

California  
951-696-7772

New York  
845-391-8318

Texas  
713-322-7242

verticalcable.com

This specification sheet is subject to change without notice.



Rev. 04/2026



## Cable ID: CAT6A SLIM 077 14

Test Limit: TIA Cat 6A Channel

Limits Version: V7.5

Date / Time: 01/29/2021 02:41:49 PM

Operator: VERTICAL TECH

Headroom 6.1 dB (NEXT 1,2-4,5)

Cable Type: Cat 6A U/UTP

NVP: 68.2%

Main: Versiv

S/N: 3676207

Software Version: V6.5 Build 5

Calibration Date: 01/26/2017

Adapter: DSX-5000 (DSX-CHA004)

S/N: 3681012

## Test Summary: PASS

Remote: Versiv

S/N: 3687009



Software Version: V6.5 Build 5

Calibration Date: 01/26/2017


Adapter: DSX-5000R (DSX-CHA004)

S/N: 3681674


Length (ft), Limit 328	[Pair 7,8]	13
Prop. Delay (ns), Limit 555	[Pair 4,5]	21
Delay Skew (ns), Limit 50	[Pair 1,2]	1
Resistance (ohms)	[Pair 4,5]	1.73
Insertion Loss Margin (dB)	[Pair 1,2]	45.6
Frequency (MHz)	[Pair 1,2]	500.0
Limit (dB)	[Pair 1,2]	49.3

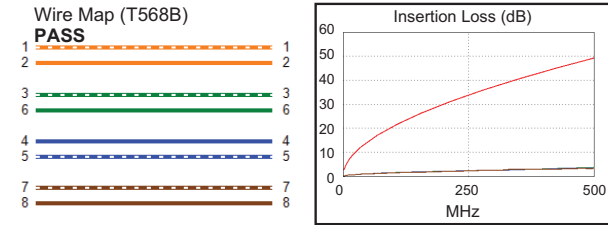


	Worst Case Margin	Worst Case Value		
<b>PASS</b>	MAIN	SR	MAIN	SR
Worst Pair	1,2-4,5	1,2-3,6	1,2-4,5	1,2-3,6
<b>NEXT (dB)</b>	6.1	6.5	6.8	6.6
Freq. (MHz)	30.6	469.0	474.0	471.0
Limit (dB)	48.6	26.9	26.7	26.8
Worst Pair	1,2	1,2	1,2	1,2
<b>PS NEXT (dB)</b>	6.8	7.2	7.1	7.4
Freq. (MHz)	34.0	303.0	474.0	472.0
Limit (dB)	45.1	28.7	23.8	23.9

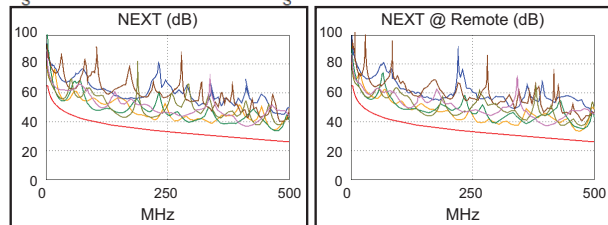


	Worst Case Margin	Worst Case Value		
<b>PASS</b>	MAIN	SR	MAIN	SR
Worst Pair	3,6-4,5	4,5-3,6	3,6-4,5	4,5-3,6
<b>ACR-F (dB)</b>	10.3	10.2	11.2	11.1
Freq. (MHz)	384.0	384.0	481.0	480.0
Limit (dB)	11.6	11.6	9.6	9.6
Worst Pair	4,5	3,6	4,5	3,6
<b>PS ACR-F (dB)</b>	13.2	13.2	14.4	14.2
Freq. (MHz)	384.0	384.0	500.0	500.0
Limit (dB)	8.6	8.6	6.3	6.3

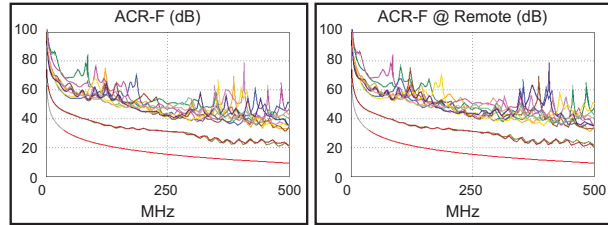

	Worst Case Margin	Worst Case Value		
<b>N/A</b>	MAIN	SR	MAIN	SR
Worst Pair	1,2-3,6	3,6-7,8	1,2-4,5	1,2-3,6
<b>ACR-N (dB)</b>	12.2	11.1	51.3	50.9
Freq. (MHz)	3.3	3.1	474.0	471.0
Limit (dB)	60.7	61.1	-21.2	-20.9
Worst Pair	3,6	3,6	1,2	1,2
<b>PS ACR-N (dB)</b>	12.2	11.7	51.4	51.7
Freq. (MHz)	3.3	3.5	474.0	472.0
Limit (dB)	58.2	57.6	-24.0	-23.9

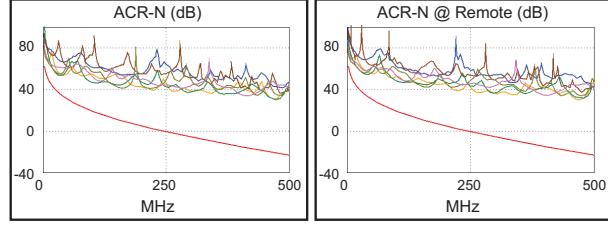

	Worst Case Margin	Worst Case Value		
<b>PASS</b>	MAIN	SR	MAIN	SR
Worst Pair	7,8	7,8	7,8	1,2
<b>RL (dB)</b>	7.9	8.3	7.9	8.4
Freq. (MHz)	361.0	337.0	361.0	500.0
Limit (dB)	6.4	6.7	6.4	6.0

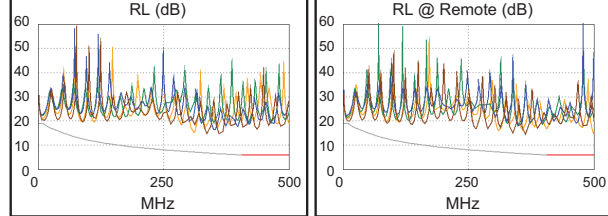

Compliant Network Standards:

10BASE-T	100BASE-TX	100BASE-T4
1000BASE-T	2.5GBASE-T	5GBASE-T
10GBASE-T	ATM-25	ATM-51
ATM-155	100VG-AnyLan	TR-4
TR-16 Active	TR-16 Passive	

LinkWare™ PC Version 10.7

Project: DEFAULT  
077 SLIM PATCH CABLES.flw

Page 10



Florida (HQ)  
800-749-2447

California  
951-696-7772

New York  
845-391-8318

Texas  
713-322-7242

verticalcable.com

This specification sheet is subject to change without notice.



Rev. 04/2026



## Cable ID: CAT6A SLIM 077 25

Test Limit: TIA Cat 6A Channel

Limits Version: V7.5

Date / Time: 01/29/2021 04:04:53 PM

Operator: VERTICAL TECH

Headroom 11.2 dB (NEXT 3,6-4,5)

Cable Type: Cat 6A U/UTP

NVP: 68.2%

Main: Versiv

S/N: 3676207

Software Version: V6.5 Build 5

Calibration Date: 01/26/2017

Adapter: DSX-5000 (DSX-CHA004)

S/N: 3681012

## Test Summary: PASS

Remote: Versiv

S/N: 3687009



Software Version: V6.5 Build 5

Calibration Date: 01/26/2017


Adapter: DSX-5000R (DSX-CHA004)

S/N: 3681674


Length (ft), Limit 328	[Pair 7,8]	25
Prop. Delay (ns), Limit 555	[Pair 4,5]	38
Delay Skew (ns), Limit 50	[Pair 1,2]	1
Resistance (ohms)	[Pair 4,5]	3.03
Insertion Loss Margin (dB)	[Pair 3,6]	42.0
Frequency (MHz)	[Pair 3,6]	495.0
Limit (dB)	[Pair 3,6]	49.0

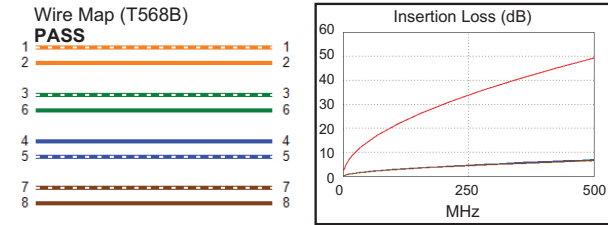


	Worst Case Margin		Worst Case Value	
PASS	MAIN	SR	MAIN	SR
Worst Pair	3,6-4,5	1,2-7,8	1,2-4,5	1,2-4,5
<b>NEXT (dB)</b>	11.2	11.6	13.2	14.0
Freq. (MHz)	69.8	143.5	404.0	445.0
Limit (dB)	42.6	37.3	28.6	27.5
Worst Pair	3,6	7,8	1,2	1,2
<b>PS NEXT (dB)</b>	12.8	12.1	13.7	14.9
Freq. (MHz)	69.8	143.5	404.0	445.0
Limit (dB)	39.8	34.4	25.7	24.6

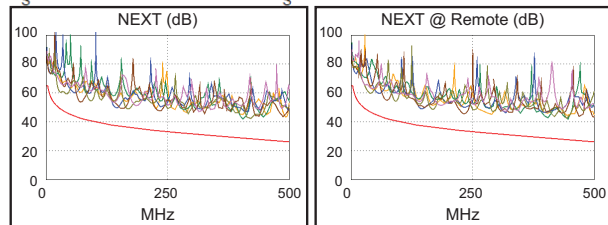


PASS	MAIN	SR	MAIN	SR
Worst Pair	4,5-3,6	3,6-4,5	3,6-4,5	4,5-3,6
<b>ACR-F (dB)</b>	16.8	17.0	17.1	17.0
Freq. (MHz)	444.0	444.0	500.0	500.0
Limit (dB)	10.3	10.3	9.3	9.3
Worst Pair	3,6	3,6	4,5	3,6
<b>PS ACR-F (dB)</b>	19.8	18.9	19.8	18.9
Freq. (MHz)	444.0	500.0	500.0	500.0
Limit (dB)	7.3	6.3	6.3	6.3

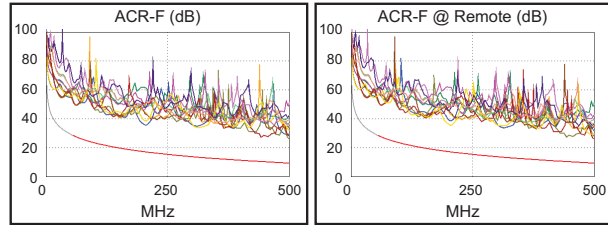

N/A	MAIN	SR	MAIN	SR
Worst Pair	3,6-4,5	3,6-4,5	1,2-4,5	1,2-4,5
<b>ACR-N (dB)</b>	16.2	16.6	51.2	54.0
Freq. (MHz)	3.9	2.6	405.0	445.0
Limit (dB)	59.2	61.6	-15.4	-18.8
Worst Pair	3,6	3,6	1,2	1,2
<b>PS ACR-N (dB)</b>	16.8	16.4	51.8	55.0
Freq. (MHz)	3.5	2.6	404.0	445.0
Limit (dB)	57.6	58.6	-18.2	-21.7

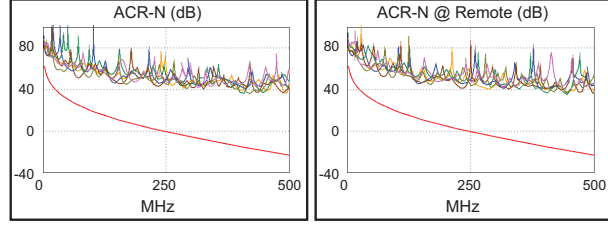

PASS	MAIN	SR	MAIN	SR
Worst Pair	7,8	7,8	7,8	7,8
<b>RL (dB)</b>	12.7	11.5	12.7	11.5
Freq. (MHz)	500.0	270.0	500.0	270.0
Limit (dB)	6.0	7.7	6.0	7.7

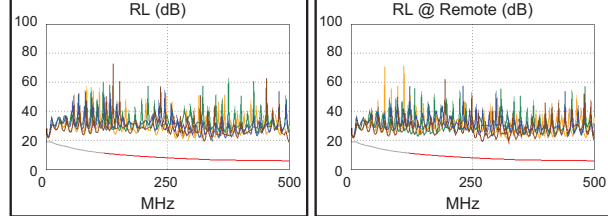

Compliant Network Standards:

10BASE-T	100BASE-TX	100BASE-T4
1000BASE-T	2.5GBASE-T	5GBASE-T
10GBASE-T	ATM-25	ATM-51
ATM-155	100VG-AnyLan	TR-4
TR-16 Active	TR-16 Passive	

LinkWare™ PC Version 10.7

Project: DEFAULT  
077 SLIM PATCH CABLES.flw

Page 11



Florida (HQ)  
800-749-2447

California  
951-696-7772

New York  
845-391-8318

Texas  
713-322-7242

verticalcable.com

This specification sheet is subject to change without notice.



Rev. 04/2026



### Cable ID: 077-2110/50BL


Test Limit: ISO11801 Channel Class Ea (+All)  
 Limits Version: V7.9  
 Date / Time: 09/23/2025 10:52:56 AM  
**Headroom 9.5 dB (NEXT 3,6-7,8)**  
 Cable Type: Cat 6A U/UTP  
 NVP: 68.2%

Main: Versiv  
 S/N: 1914097  
 Software Version: V6.11 Build 2  
 Calibration Date: 08/29/2020  
 Adapter: DSX-8000 (DSX-CHA004)  
 S/N: 23482001



### Test Summary: PASS

Remote: Versiv  
 S/N: 1914055  
 Software Version: V6.11 Build 2  
 Calibration Date: 08/29/2020  
 Adapter: DSX-8000R (DSX-CHA004)  
 S/N: 3773758

Length (ft), Limit 328	[Pair 4,5]	255
Prop. Delay (ns), Limit 555	[Pair 1,2]	394
Delay Skew (ns), Limit 50	[Pair 1,2]	14
Resistance (ohms), Limit 25.00	[Pair 7,8]	16.77
Resist. Unbal. (ohms), Limit 0.500	[Pair 3,6]	0.127
Resist. P2P Unbal. (ohms), Limit 0.580	[Pair 4,5-7,8]	0.065
Insertion Loss Margin (dB)	[Pair 7,8]	5.0
Frequency (MHz)	[Pair 7,8]	500.0
Limit (dB)	[Pair 7,8]	49.3





Wire Map (T568B)





Worst Case Margin Worst Case Value



	MAIN	SR	MAIN	SR
<b>PASS</b>				
Worst Pair	3,6-7,8	3,6-4,5	3,6-7,8	3,6-7,8
<b>NEXT (dB)</b>	9.5	12.3	9.9	16.7
Freq. (MHz)	184.0	7.5	467.0	500.0
Limit (dB)	35.4	58.6	28.4	27.9
Worst Pair	4,5	3,6	3,6	3,6
<b>PS NEXT (dB)</b>	10.7	12.6	12.2	16.4
Freq. (MHz)	35.0	7.4	474.0	500.0
Limit (dB)	44.9	56.2	25.3	24.8





	MAIN	SR	MAIN	SR
<b>PASS</b>				
Worst Pair	3,6-4,5	4,5-3,6	3,6-4,5	4,5-3,6
<b>ACR-F (dB)</b>	3.9	3.2	3.9	3.2
Freq. (MHz)	482.0	482.0	482.0	482.0
Limit (dB)	9.6	9.6	9.6	9.6
Worst Pair	4,5	3,6	4,5	3,6
<b>PS ACR-F (dB)</b>	6.9	5.5	6.9	5.5
Freq. (MHz)	482.0	482.0	482.0	482.0
Limit (dB)	6.6	6.6	6.6	6.6



	MAIN	SR	MAIN	SR
<b>PASS</b>				
Worst Pair	3,6-7,8	3,6-4,5	3,6-7,8	3,6-7,8
<b>ACR-N (dB)</b>	10.2	12.1	15.0	21.7
Freq. (MHz)	3.9	4.0	474.0	500.0
Limit (dB)	59.2	58.9	-19.6	-21.4
Worst Pair	3,6	3,6	7,8	3,6
<b>PS ACR-N (dB)</b>	9.3	13.2	17.9	23.5
Freq. (MHz)	3.8	4.0	474.0	499.0
Limit (dB)	57.0	56.4	-22.6	-24.4



	MAIN	SR	MAIN	SR
<b>PASS</b>				
Worst Pair	1,2	4,5	1,2	4,5
<b>RL (dB)</b>	5.1	6.0	5.1	10.6
Freq. (MHz)	3.4	4.4	3.4	496.0
Limit (dB)	19.0	19.0	19.0	6.0



Compliant Network Standards:  
 10BASE-T 100BASE-TX 100BASE-T4  
 1000BASE-T 2.5GBASE-T 5GBASE-T  
 10GBASE-T ATM-25 ATM-51  
 ATM-155 100VG-AnyLan ATM-4  
 TR-16 Active TR-16 Passive

LinkWare™ PC Version 11.4

Project: DEFAULT  
 Site: Not Set  
 Floor: Not Set  
 Rack: Not Set  
 □2509418Y-1.flw

Building: Not Set  
 Room: Not Set  
 Patch: Not Set



Florida (HQ)  
800-749-2447

California  
951-696-7772

New York  
845-391-8318

Texas  
713-322-7242





### Cable ID: 077-2110/50BL


Test Limit: ISO11801 Channel Class Ea (+All)  
 Limits Version: V7.9  
 Date / Time: 09/23/2025 10:52:56 AM  
 Headroom 9.5 dB (NEXT 3,6-7,8)  
 Cable Type: Cat 6A U/UTP  
 NVP: 68.2%

Main: Versiv  
 S/N: 1914097  
 Software Version: V6.11 Build 2  
 Calibration Date: 08/29/2020  
 Adapter: DSX-8000 (DSX-CHA004)  
 S/N: 23482001

### Test Summary: PASS

Remote: Versiv  
 S/N: 1914055  
 Software Version: V6.11 Build 2  
 Calibration Date: 08/29/2020  
 Adapter: DSX-8000R (DSX-CHA004)  
 S/N: 3773758

	Worst Case Margin		Worst Case Value	
	MAIN	SR	MAIN	SR
<b>PASS</b>				
Worst Pair	3,6	3,6	7,8	3,6
TCL (dB)	3.1	6.3	17.6	19.4
Freq. (MHz)	3.9	4.1	230.0	167.0
Limit (dB)	40.0	40.0	13.1	15.8
<b>N/A</b>				
Worst Pair			3,6-7,8	7,8-3,6
CDNEXT (dB)			25.3	26.2
Freq. (MHz)			415.0	422.0
Limit (dB)				
<b>N/A</b>				
Worst Pair			1,2	1,2
CMRL (dB)			5.2	5.0
Freq. (MHz)			1.0	6.3
Limit (dB)				
<b>PASS</b>				
Worst Pair	4,5	4,5	4,5	4,5
ELTCTL (dB)	20.3	21.6	27.4	26.9
Freq. (MHz)	1.0	1.0	19.6	19.6
Limit (dB)	30.0	30.0	4.1	4.1

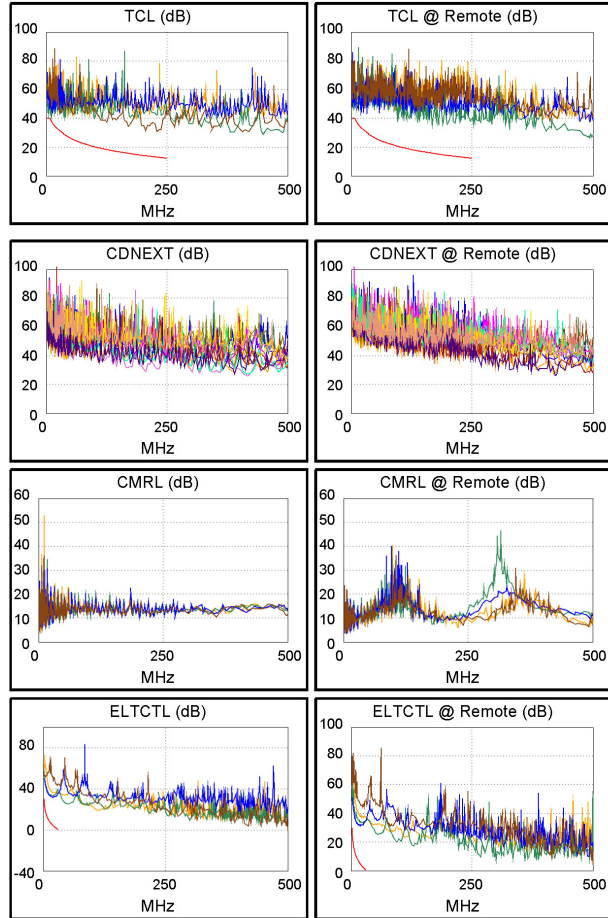

LinkWare™ PC Version 11.4

Project: DEFAULT  
 Site: Not Set  
 Floor: Not Set  
 Rack: Not Set  
 □□2509418Y-1.flw

Building: Not Set  
 Room: Not Set  
 Patch: Not Set



Florida (HQ)  
800-749-2447

California  
951-696-7772

New York  
845-391-8318

Texas  
713-322-7242

